




SIZES & MATERIAL

PAN-WRAP™ Split Harness Wrap & Tool

More than just another harness wrap

Engineered for flexibility and maximum protection of wires and cables

PAN-WRAP™ Split Harness Wrap is an innovative addition to the PANDUIT Abrasion Protection Line. It features slotted walls that provide flexibility and allow for easy breakouts along the length of the harness. PAN-WRAP™ Tools are available for quick and easy installation.

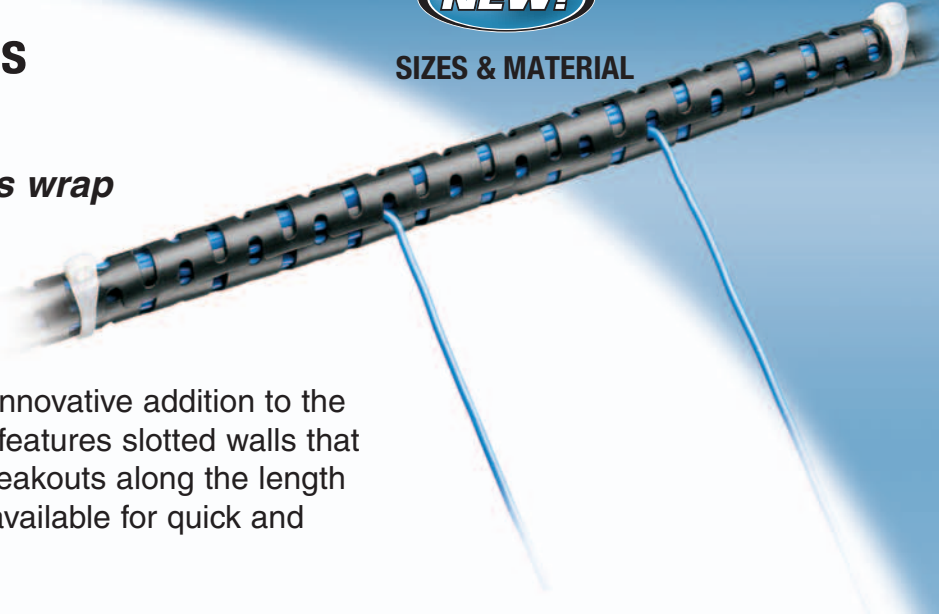

Key Features

Benefits

Patented installation tool with 180° opening	Allows easy loading of maximum bundle diameters to speed installation, providing the lowest installed cost
Patented slot pattern	Provides improved flexibility and abrasion protection in any application Provides for easy wire or cable breakouts Maintains uniform bundle protection in dynamic applications
Large overlap	One size accommodates a wide range of bundle diameters, minimising the part numbers to inventory
Packaged on a reel	Ensures easy handling and dispensing of product

Installation Instructions



Open PAN-WRAP™ Tool and insert bundle.



Close tool to contain bundle.



Slide PAN-WRAP Split Harness Wrap onto end of tool until approximately 3 inches of it covers the bundle.



Grasp end of PAN-WRAP Split Harness Wrap and bundle while pulling the tool along the bundle length.

PAN-WRAP™ Split Harness Wrap & Tool

Ordering Information



Now available in larger sizes and flame retardant material.

Part Number	Material**	Color	Length Per Reel	Max. Bundle Diameter	Min. Bundle Diameter‡	Nominal I.D.	Temperature Range	Std. Pkg. Qty.*
			M	mm	mm	mm		
			61.1	14.0	.43	12.7		
PW50F-T20	Polyethylene	Black	61.1	14.0	10.9	12.7	-40°C to 50°C	1
PW50F-T	Polyethylene	Natural	61.1	14.0	10.9	12.7	-40°C to 50°C	1
PW75F-C20	Polyethylene	Black	30.5	20.6	14.0	19.1	-40°C to 50°C	1
PW75F-C	Polyethylene	Natural	30.5	20.6	14.0	19.1	-40°C to 50°C	1
PW100F-C	Polyethylene	Natural	30.5	28.7	20.6	25.4	-40°C to 50°C	1
PW100F-C20	Polyethylene	Black	30.5	28.7	20.6	25.4	-40°C to 50°C	1
PW150F-L	Polyethylene	Natural	15.2	41.4	28.7	38.1	-40°C to 50°C	1
PW150F-L20	Polyethylene	Black	15.2	41.4	28.7	38.1	-40°C to 50°C	1
PW50FR-T	Flame Retardant Polyethylene	Natural	61.1	14.0	10.9	12.7	-40°C to 50°C	1
PW50FR-T20	Flame Retardant Polyethylene	Black	61.1	14.0	10.9	12.7	-40°C to 50°C	1
PW75FR-C	Flame Retardant Polyethylene	Natural	30.5	20.6	14.0	19.1	-40°C to 50°C	1
PW75FR-C20	Flame Retardant Polyethylene	Black	30.5	20.6	14.0	19.1	-40°C to 50°C	1
PW100FR-C	Flame Retardant Polyethylene	Natural	30.5	28.7	20.6	25.4	-40°C to 50°C	1
PW100FR-C20	Flame Retardant Polyethylene	Black	30.5	28.7	20.6	25.4	-40°C to 50°C	1
PW150FR-L	Flame Retardant Polyethylene	Natural	15.2	41.4	28.7	38.1	-40°C to 50°C	1
PW150FR-L20	Flame Retardant Polyethylene	Black	15.2	41.4	28.7	38.1	-40°C to 50°C	1

*Order number of reels required.

‡Diameter can be further reduced with the use of cable ties.

**Flame retardant products are manufactured from a material that is rated UL94V-0.

PAN-WRAP™ Installation Tool



Part Number	Color	For Use With	Std. Pkg. Qty.*
PWT50	White	PW50F	1
PWT75	White	PW75F	1
PWT100	White	PW100F	1
PWT150	White	PW150F	1

*Order number of tools required.

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: +44 (0)20 8601 7200

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6379.6700

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.3767.7011

PANDUIT LATIN AMERICA
Jalisco, Mexico
cs-la@panduit.com
Phone: 52.333.666.2501

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of PANDUIT product warranties, log on to www.panduit.com/warranty

For more information or to request a catalogue



www.panduit.com/emea

cs-emea@panduit.com • +44 (0)20 8601 7200

© 2005 PANDUIT Corp.
ALL RIGHTS RESERVED.