


Introduction

Product Facts

- Designed for both military and commercial applications
- Low engaging force is achieved by the manner in which Twist Pin Contacts are designed
- The metal shell and plastic shell are available with solder cup and solid or stranded wire terminations
- Mating force maximum is 10 oz. [2.78N] times the number of contacts
- Durability — No known mechanical or electrical issues detrimental to the function of the connectors after 500 cycles of mating and unmating
- Current Rating — 3 amps max per contact

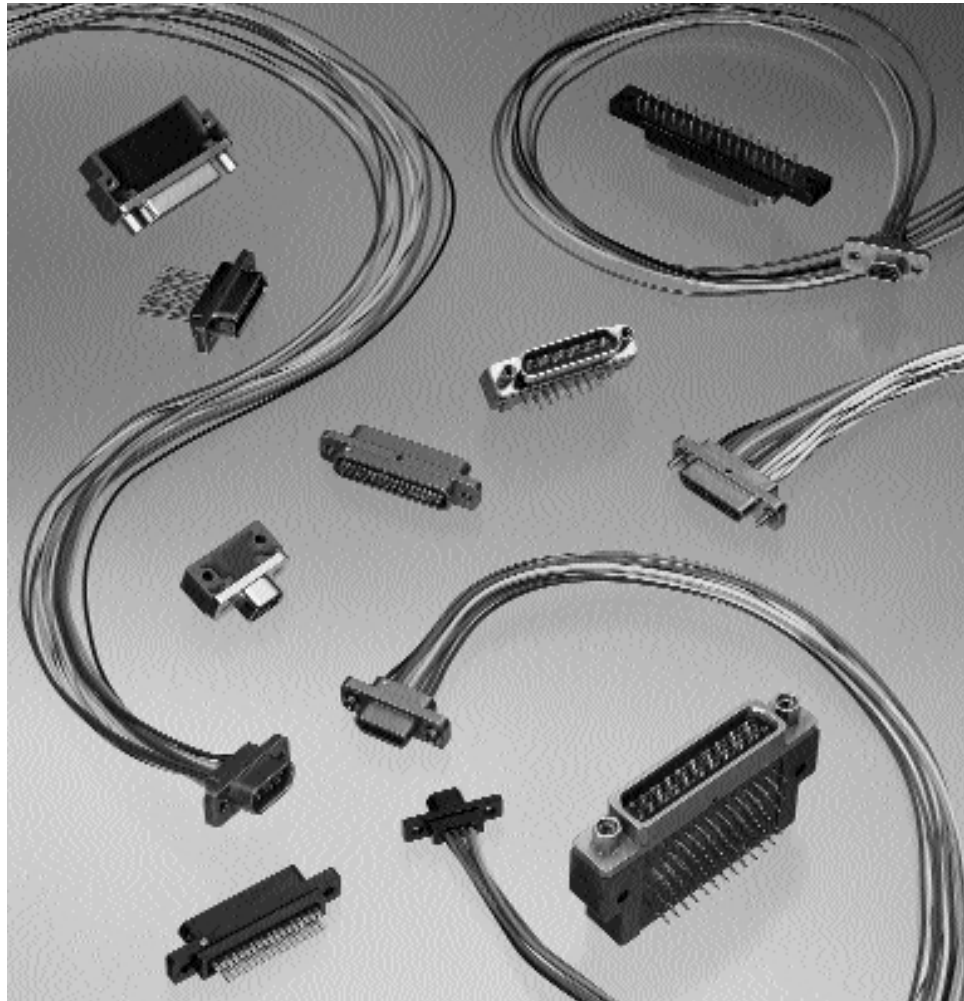

MICRODOT Connectors MCK and MCD High Density Microminiature "D" Connectors described in this catalog comprise a complete connector system, which is adaptable to a numerous variety of form factors. Low engaging force is achieved by the manner in which the twist pin contacts are designed. By constructing the male contact as a breathing helical spring, electrical contact is achieved at many points around the periphery of the pin bundle rather than at a few discrete points, as in conventional pin designs. Normal twist

pin engagement force is 6 oz. [1.67N] typically and 8 oz. [2.22N] maximum. The low force twist pins exhibit an engaging force of 4 oz. [1.11N] typically and 5 oz. [1.39N] maximum. Low force twist pins are standard in MIL-PRF-83513 configurations of MCK and MCD connectors and may be supplied as an option in all other configurations.

The MCK and MCD Series of connectors featured in this catalog are designed to meet the applicable requirements of MIL-PRF-83513, for intermateability, interchangeability, and

performance. Designed for both military and commercial applications, the MCK's and MCD's are especially well suited for use in miniaturized airborne and space electronics, computers, and test equipment. The metal shell MCK's and plastic shell MCD's are available with solder cup, and solid or stranded wire terminations. MCK transition blocks are standard for printed circuit board mounting. Custom termination configurations for both MCK and MCD can be accommodated. Micro D's are also supplied in wired harness assemblies.

MCK/MCD/MCDM Series Metal and Plastic Shell Connectors

Technical and Performance Data

(Applicable to MCK, MCD and MCDM unless otherwise noted)

Electrical

Contacts — Pin 24 AWG twist pin, Socket 24 AWG precision machined barrel, Wire Range 24 AWG to 30 AWG solid and stranded.

Contact Resistance — (voltage drop) 25 millivolts max. at 3 amps, 25° ± 3° C.

Current Rating — 3 amps max. per contact.

Dielectric Withstanding Voltage — Volts RMS 60 Hz at room ambient. At sea level 600V solder pots, 800V wire terminations & transition blocks. At 70,000 ft. [21,336 m] 150V solder pots, 200V wire terminations & transition blocks.

Insulation Resistance — 5,000 megohms min. (@ 500 VDC) at ambient room temperature.

Magnetic Permeability — 2 mu max.

Mechanical

Contact Spacing — .050 [1.27mm] centers.

Contact Engagement & Separation — Standard contact engaging force is 6.0 oz. [1.67N] (8.0 oz. [2.22N] max.), low engaging force contact is 3.5 oz. [.97N] (5.0 oz. [1.39N] max.). Separation force for both is 0.5 [1.4N] oz. min.

Mating Force Maximum — Calculated as 10 oz. times the number of

contacts.

Environmental

Temperature Range — -55° C to +125° C for MCK/MCD, -55° C to +150° C for MCDM.

Vibration — No discontinuity in excess of 1 µ sec. when tested in accordance with MIL-STD-1344, Method 2005, test Condition IV.

Solderability — Connectors shall pass the test requirements of MIL-STD-202, Method 208

Shock — No discontinuity in excess of 1 µ sec. when tested in accordance with MIL-STD-1344, Method 2004, test Condition E.

Durability — No mechanical or electrical defects detrimental to the function of the connectors after 500 cycles of mating and unmating.

Humidity — After exposure to humidity as specified by MIL-STD-1344, Method 1002, Type II, IR shall be 1 megohm min. following step 7a of Method 1002 and 1000 megohms min. after 24 hours of conditioning per Method 1002.

Salt Spray — Connectors shall meet the performance requirements of contact resistance, mating and unmating forces, and contact retention after being subjected to the 48-hour 5% solution salt spray

test per MIL-STD-1344, Method 1001, Condition B.

Fluid Immersion — Unmated connectors after being fully immersed in one of the following fluids, for the prescribed time, will mate at a force of 10 oz. [2.78N] times the number of contacts or less: Perchloroethylene, 2 hours; Lubricating oil per MIL-L-23699, 20 hours.

Insert Retention — Inserts will withstand a 50 lb. [34N/cm²] per square inch load in either direction.

Crimp Termination Tensile Strength — (Unassembled contacts with crimped stranded wire terminations) Wires will not pull out of contacts when the following axial loads are applied: 24 AWG, 5 lbs. [22.24N]; 26 AWG, 4 lbs. [17.79N]; 28 AWG, 3 lbs. [13.34N]

Outgassing — When tested in accordance with SP-R-0022, Total Mass Loss (TML) shall be less than 1.0% and Volatile Condensable Material (VCM) shall be less than 0.1% of the original specimen.

Materials and Finishes

Contacts — Copper alloy plated with .000050 [.00127] gold over copper flash per MIL-G-45204 Type II.

Hardware — see pages 117 and 118.

MCK-Metal Shell —

Insulator — RYTON R4, Polyphenylene Sulfide per MIL-M-24519
 Interfacial Seal — Fluorosilicone Rubber per MIL-R-25988 (socket side only)
 Body Shell — Aluminum alloy-high grade plated
 Cadmium per QQ-P-416
 Nickel, electroless per AMS 2404

Transition Block Shell —

RYTON R4, Polyphenylene Sulfide per MIL-M-24519
 Potting Material — Epoxy, Black

MCD-Plastic Shell —

Insulator/Body — Polyester, glass filled per MIL-M-24519, Polyphenylene Sulfide per MIL-M-24519

Wire Terminations —

Solid copper per QQ-W-343 gold plated per MIL-G-45204
 Stranded TEFLON insulated per MIL-W-16878
 Stranded TEFLON insulated per MIL-W-22759/11, /33
 Solid copper per QQ-W-343, solder dipped (Transition block)

MCDM-Metal Shell —

Insulator — Diallyl Phthalate per MIL-M-14, Type SDG-F
 Body Shell — Aluminum alloy—high grade, nickel plated

3 Pin and Socket Connectors

Twist Pin, Pin and Socket Contacts

The contact spring member normally found in socket contacts has been eliminated by creating a breathing helical spring principle on the pin contact — smaller, more durable contacts can be manufactured economically.



Wire range 24-36 AWG solid & stranded.


MIL-PRF-83513 — Only the descriptive legend in bold italic is applicable to current MIL-PRF-83513 configurations; MIL-PRF-83513/1 through /4 — MCK metal shell; MIL-PRF-83513/6 through /9 — MCD plastic shell.

In addition, MIL-PRF-83513 solid copper wire termination is specified 25 AWG, 0.5; and 1.0 [25.4] lengths only and stranded insulated wire termination is specified 26 AWG, 18.0 [457.2] and 36.0 [914.4] lead lengths only. Hardware for MIL-PRF-83513 configurations is specified separately by the M83513/5-XX designation. M83513/1 through /4 and /6 through /9 specify no hardware (B). Mounting/mating hardware is shown on page 117 and 118 with the applicable military nomenclature. The MICRODOT catalog part number for a MIL-PRF-83513 configuration may be constructed to include the desired hardware.


See pages 134-138 for M83513/ cross reference.

How To Specify MCK and MCD Connectors

Met

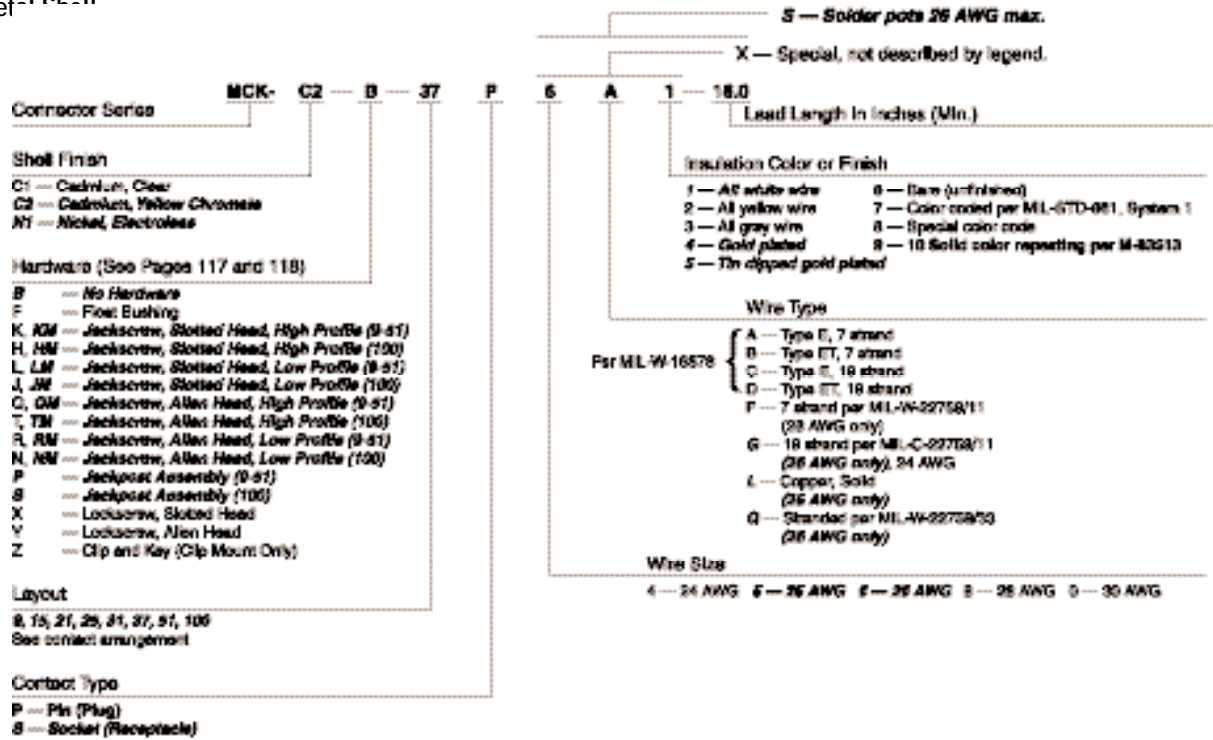


Pla:

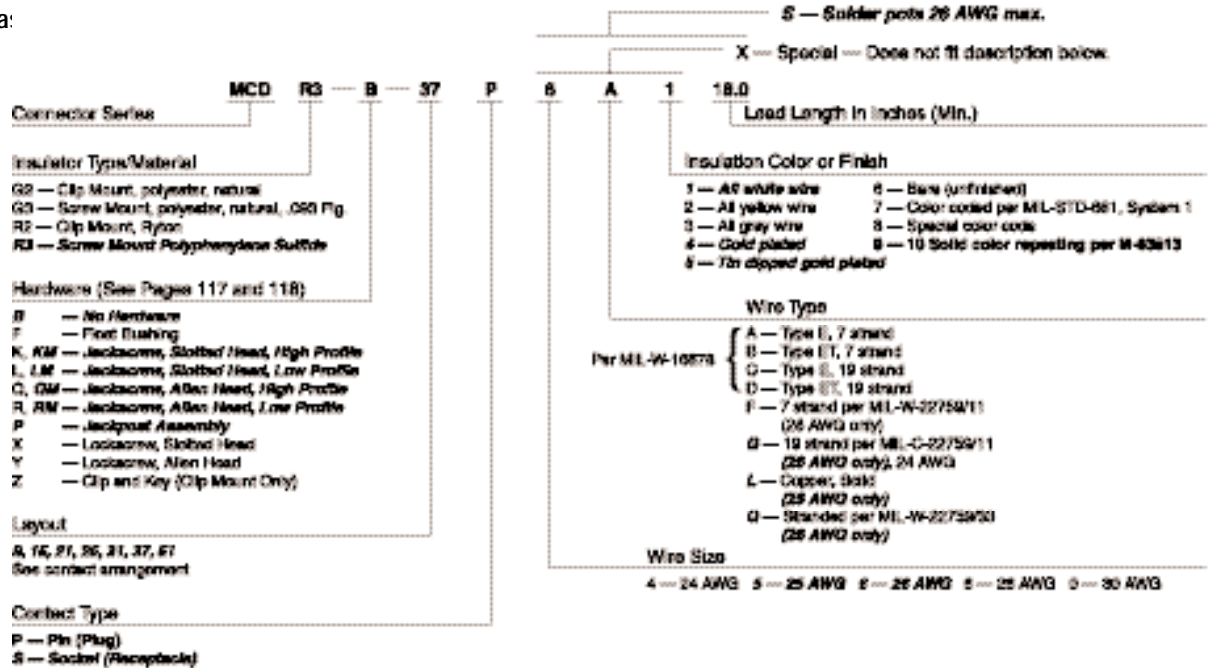

Note: Items in bold italic are qualified to MIL-PRF-83513.

Contact Arrangements

Face View of Pin Insert
(Socket Side is Mirror Image)

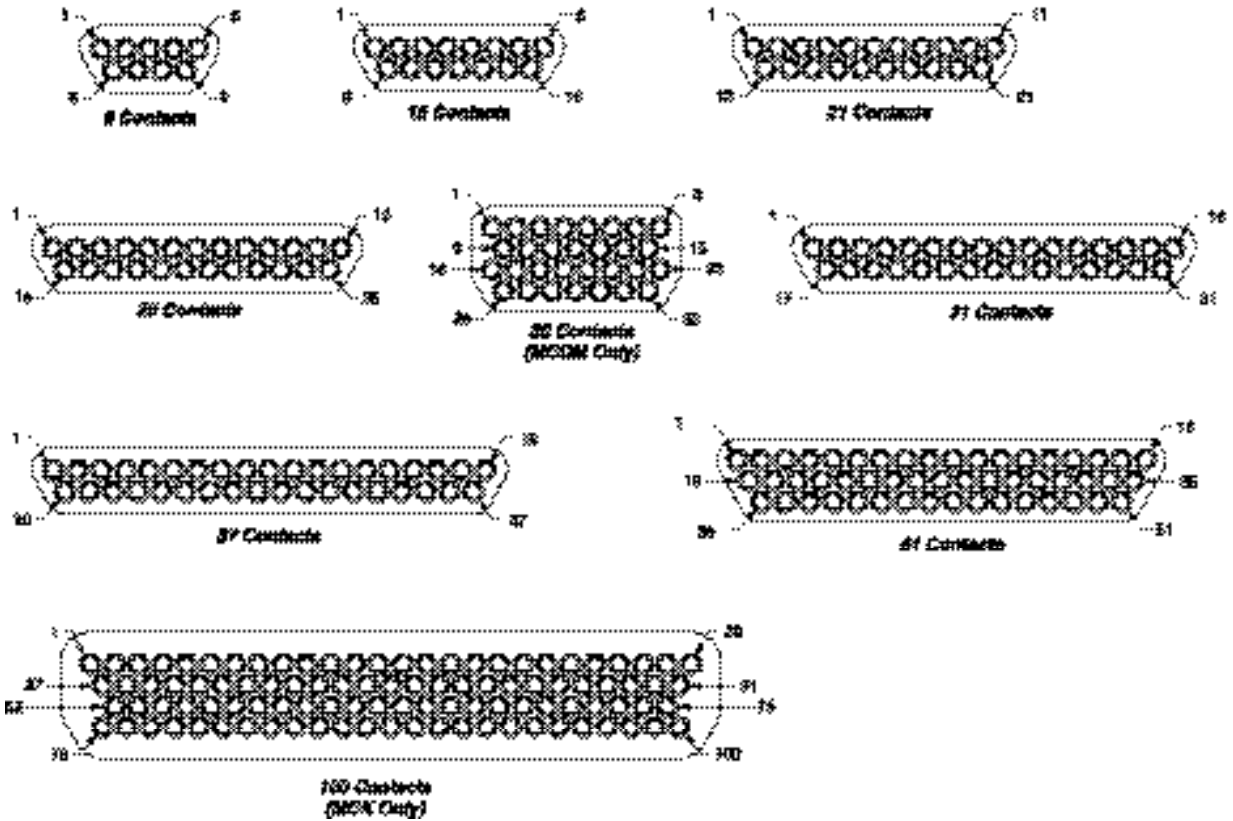


Note: MCK metal shells are not designed to intermate or interchange with MCD plastic shells. If metal/plastic intermating is desired, use MCDM Series Metal Shell on pages 128 and 129 with MCD Series Plastic Shell on page 114.

MCK Series Metal Shell Connectors


Dimensions per MIL-PRF-83513





Plug
(Pin side)



Receptacle
(Socket side)

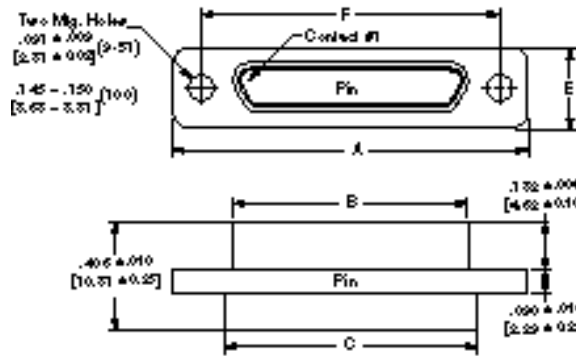

Crimp or Solder

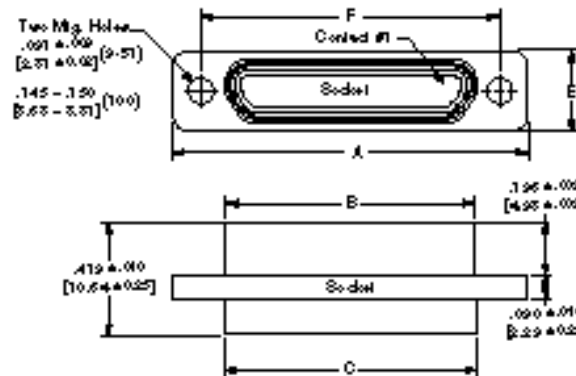

Crimp or Solder




Part Number	A $\pm .010$ [.254]	B Max.	C $+0.010$ [.254] -0.018 [.457]	D Max	E $\pm .010$ [.254]	F $\pm .005$ [.127]
MCK**- 9P***	.775 19.68	.333 8.46	.390 9.91	.270 6.86	.298 7.57	.565 14.35
MCK**- 9S***	.775 19.68	.402 10.22	.390 9.91	.270 6.86	.298 7.57	.565 14.35
MCK**- 15P***	.925 23.50	.483 12.27	.540 13.72	.270 6.86	.298 7.57	.715 18.16
MCK**- 15S***	.925 23.50	.552 14.03	.540 13.72	.270 6.86	.298 7.57	.715 18.16
MCK**- 21P***	1.075 27.30	.633 16.08	.690 17.53	.270 6.86	.298 7.57	.865 21.97
MCK**- 21S***	1.075 27.30	.702 17.84	.690 17.53	.270 6.86	.298 7.57	.865 21.97
MCK**- 25P***	1.175 29.84	.733 18.62	.790 20.07	.270 6.86	.298 7.57	.965 24.51
MCK**- 25S***	1.175 29.84	.802 20.38	.790 20.07	.270 6.86	.298 7.57	.965 24.51
MCK**- 31P***	1.325 33.66	.883 22.43	.940 23.88	.270 6.86	.298 7.57	1.115 28.32
MCK**- 31S***	1.325 33.66	.952 24.19	.940 23.88	.270 6.86	.298 7.57	1.115 28.32
MCK**- 37P***	1.475 37.46	1.033 26.24	1.090 27.69	.270 6.86	.298 7.57	1.265 32.13
MCK**- 37S***	1.475 37.46	1.102 28.00	1.090 27.69	.270 6.86	.298 7.57	1.265 32.13
MCK**- 51P***	1.425 36.20	.983 24.97	1.040 26.42	.310 7.87	.341 8.66	1.215 30.86
MCK**- 51S***	1.425 36.20	1.052 26.73	1.040 26.42	.310 7.87	.341 8.66	1.215 30.86
MCK**- 100P***	2.160 54.86	1.383 35.13	1.432 36.37	.360 9.15	.384 9.75	1.800 45.71
MCK**- 100S***	2.160 54.86	1.508 38.31	1.432 36.37	.360 9.15	.384 9.75	1.800 45.71


P = Pin, S = Socket

MCK Series Metal Shell Connectors Panel Mounting — Cutout Dimensions

Panel Mounting Dimensions — MCK

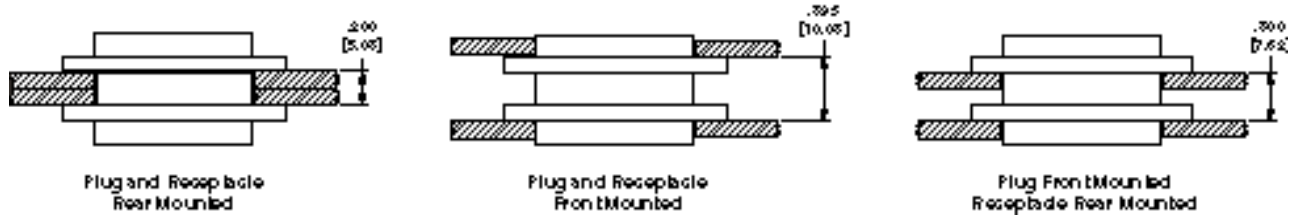

Panel Cutout Dimensions — MCK

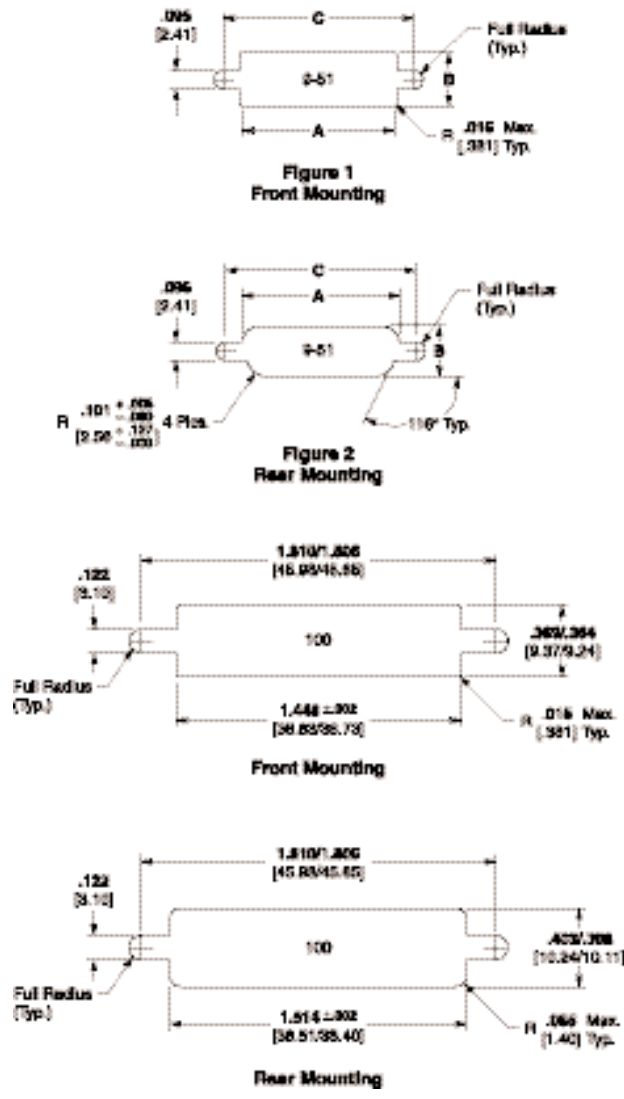


Number of Contacts	Fig.	Dimensions (inches)		
		A + .004 [.102] - .000 [.000]	B + .004 [.102] - .000 [.000]	C + .005 [.127] - .000 [.000]
9	1	.404 10.26	.274 6.96	.570 14.48
	2	.406 10.31	.257 6.53	.570 14.48
15	1	.554 14.07	.274 6.96	.720 18.29
	2	.556 14.12	.257 6.53	.720 18.29
21	1	.704 17.88	.274 6.96	.870 22.10
	2	.706 17.93	.257 6.53	.870 22.10
25	1	.804 20.42	.274 6.96	.970 24.64
	2	.806 20.47	.257 6.53	.970 24.64
31	1	.954 24.23	.274 6.96	1.120 28.45
	2	.956 24.28	.257 6.53	1.120 28.45
37	1	1.104 28.04	.274 6.96	1.270 32.26
	2	1.106 28.09	.257 6.53	1.270 32.26
51	1	1.054 26.77	.314 7.98	1.220 30.99
	2	1.056 26.82	.300 7.62	1.220 30.99

3


Pin and Socket Connectors

MCD Series Plastic Shell Connectors

Screw Mount
Dimensions Per
MIL-PRF-83513




Plug
(Pin side)



Receptacle
(Socket side)

Polyphenylene Sulfide (RYTON) —
MCDR3* per MIL-PRF-83513

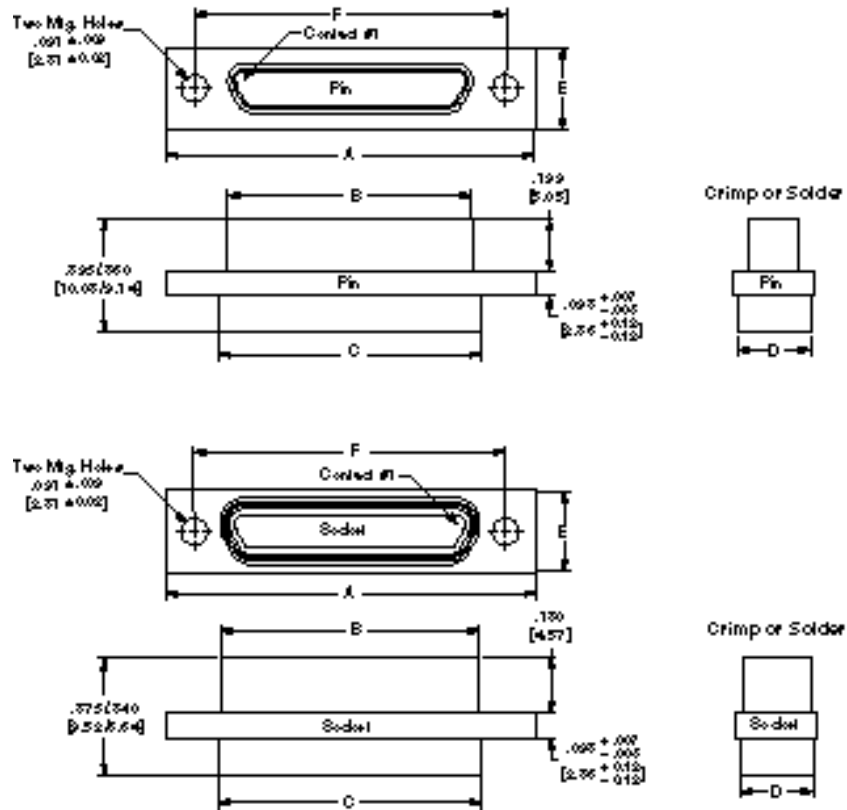

Note: MCD Plastic Screw Mount Series is intermateable with MCDM Metal Series Connectors (Pages 128 and 129).

Part Number	A ± .010 [.254]	B Max.	C +.010 [.254] -.018 [.457]	D Max	E ± .010 [.254]	F ± .005 [.127]	Avg. Weight lbs. ± 5% [grams]
MCD**- 9P***	.788 20.02	.2918 7.412	.398 10.11	.173 4.39	.208 5.28	.565 14.35	.0017 0.77
MCD**- 9S***	.788 20.02	.3798 9.647	.398 10.11	.173 4.39	.208 5.28	.565 14.35	.0016 0.72
MCD**- 15P***	.938 23.83	.4418 11.222	.548 13.92	.173 4.39	.208 5.28	.715 18.16	.0024 1.08
MCD**- 15S***	.938 23.83	.5298 13.457	.548 13.92	.173 4.39	.208 5.28	.715 18.16	.0023 1.04
MCD**- 21P***	1.088 27.64	.5918 15.032	.698 17.73	.173 4.39	.208 5.28	.865 21.97	.0035 1.59
MCD**- 21S***	1.088 27.64	.6798 17.267	.698 17.73	.173 4.39	.208 5.28	.865 21.97	.0034 1.54
MCD**- 25P***	1.188 30.18	.6918 17.572	.798 20.27	.173 4.39	.208 5.28	.965 24.51	.0042 1.90
MCD**- 25S***	1.188 30.18	.7798 19.807	.798 20.27	.173 4.39	.208 5.28	.965 24.51	.0037 1.67
MCD**- 31P***	1.338 33.99	.8418 21.382	.948 24.08	.173 4.39	.208 5.28	1.115 28.32	.0053 2.40
MCD**- 31S***	1.338 33.99	.9298 23.617	.948 24.08	.173 4.39	.208 5.28	1.115 28.32	.0048 2.17
MCD**- 37P***	1.488 37.80	.9918 25.192	1.098 27.89	.173 4.39	.208 5.28	1.265 32.13	.0057 2.58
MCD**- 37S***	1.488 37.80	1.0798 27.427	1.098 27.89	.173 4.39	.208 5.28	1.265 32.13	.0051 2.31
MCD**- 51P***	1.438 36.53	.9418 23.922	1.048 26.62	.220 5.59	.250 6.35	1.215 30.86	.0072 3.26
MCD**- 51S***	1.438 36.53	1.0298 26.157	1.048 26.62	.220 5.59	.250 6.35	1.215 30.86	.0063 2.85


P = Pin, S = Socket

Note: Weight given is with .500 [12.7] uninsulated, solid, 24 AWG gold plated copper pigtailed.


*See "How to Specify" for description, on page 110.

MCD Series Plastic Shell Connectors (Continued)


Clip Mount — MCD





Plug
(Pin side)

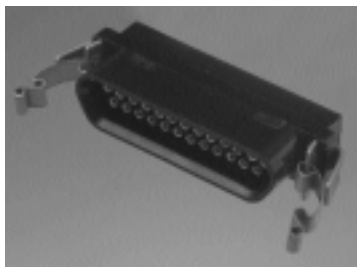

Receptacle
(Socket side)

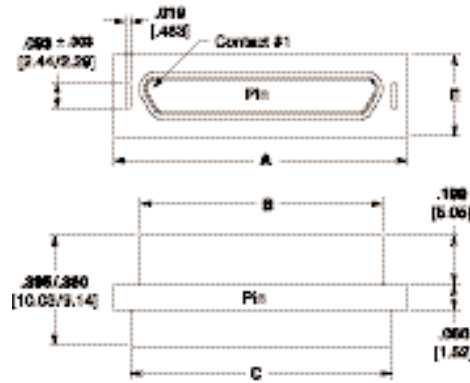

Crimp or Solder

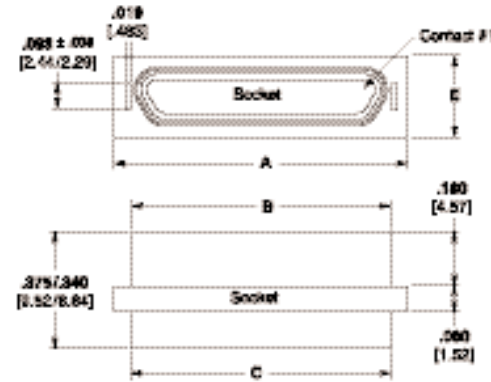

Crimp or Solder



Note: Clip Mount not covered by current issue of MIL-PRF-83513.

Part Number	A ±.005 [.127]	B Max.	C +.010 [.254]	D ±.010 (.254)	E ±.005 [.127]	Avg. Weight lbs. ± 5% [grams]
MCD**- 9P***	.506 12.85	.2918 74.12	.398 10.11	.165 4.19	.208 5.28	.0017 0.77
MCD**- 9S***	.506 12.85	.3798 96.47	.398 10.11	.165 4.19	.208 5.28	.0016 0.72
MCD**- 15P***	.656 16.66	.4418 112.22	.548 13.92	.165 4.19	.208 5.28	.0024 1.08
MCD**- 15S***	.656 16.66	.5298 134.57	.548 13.92	.165 4.19	.208 5.28	.0023 1.04
MCD**- 21P***	.806 20.47	.5918 150.32	.698 17.73	.165 4.19	.208 5.28	.0035 1.58
MCD**- 21S***	.806 20.47	.6798 172.67	.698 17.73	.165 4.19	.208 5.28	.0034 1.54
MCD**- 25P***	.906 23.01	.6918 175.72	.798 20.27	.165 4.19	.208 5.28	.0042 1.90
MCD**- 25S***	.906 23.01	.7798 198.07	.798 20.27	.165 4.19	.208 5.28	.0037 1.68
MCD**- 31P***	1.056 26.82	.8418 213.82	.948 24.08	.165 4.19	.208 5.28	.0053 2.40
MCD**- 31S***	1.056 26.82	.9298 236.17	.948 24.08	.165 4.19	.208 5.28	.0048 2.17
MCD**- 37P***	1.206 30.63	.9918 251.92	1.098 27.89	.165 4.19	.208 5.28	.0057 2.58
MCD**- 37S***	1.206 30.63	1.0798 274.27	1.098 27.89	.165 4.19	.208 5.28	.0051 2.31
MCD**- 51P***	1.156 29.36	.9418 239.22	1.048 26.62	.208 5.28	.250 6.35	.0072 3.26
MCD**- 51S***	1.156 29.36	1.0298 261.57	1.048 26.62	.208 5.28	.250 6.35	.0063 2.85

P = Pin, S = Socket

Note: Weight given is with .500 [12.7] uninsulated, solid, 24 AWG gold plated copper pigtailed.


*See "How to Specify" for description, on page 110.

3
Pin and Socket Connectors


MCD Series Plastic Shell Connectors Panel Mounting — Cutout Dimensions

Panel Mounting Dimensions — MCD

Clip Mount

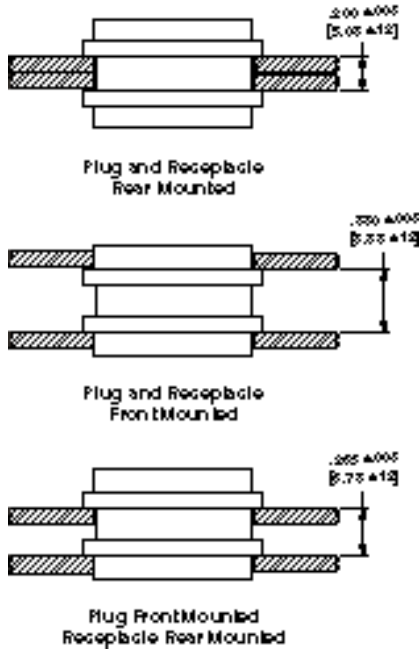

Screw Mount

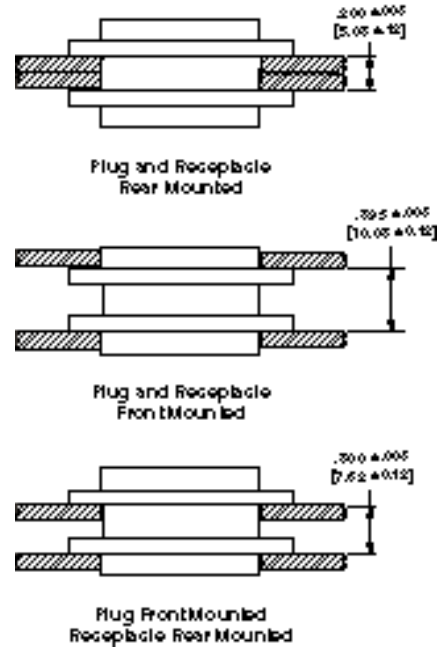

Panel Cutout Dimensions — MCD

Clip Mounting




Figure 1




Figure 3

Screw Mounting




Figure 2




Figure 4

Number of Contacts	Fig.	A		B		C	
		+ .004 [.102] - .000 [.000]	+ .004 [.102] - .000 [.000]	+ .004 [.102] - .000 [.000]	+ .005 [.127] - .000 [.000]	+ .005 [.127] - .000 [.000]	+ .005 [.127] - .000 [.000]
9	1	.438 [11.13]	.177 [4.50]	—	—	—	—
	2	.412 [10.46]	.177 [4.50]	.570 [14.48]	—	—	—
	3	.438 [11.13]	.222 [5.64]	—	—	—	—
	4	.384 [9.75]	.222 [5.64]	.570 [14.48]	—	—	—
15	1	.588 [14.93]	.177 [4.50]	—	—	—	—
	2	.562 [14.27]	.177 [4.50]	.720 [18.29]	—	—	—
	3	.588 [14.93]	.222 [5.64]	—	—	—	—
	4	.534 [13.56]	.222 [5.64]	.720 [18.29]	—	—	—
21	1	.738 [18.75]	.177 [4.50]	—	—	—	—
	2	.712 [18.08]	.177 [4.50]	.870 [22.10]	—	—	—
	3	.738 [18.75]	.222 [5.64]	—	—	—	—
	4	.684 [17.37]	.222 [5.64]	.870 [22.10]	—	—	—
25	1	.838 [21.29]	.177 [4.50]	—	—	—	—
	2	.812 [20.62]	.177 [4.50]	.970 [24.64]	—	—	—
	3	.838 [21.29]	.222 [5.64]	—	—	—	—
	4	.784 [19.91]	.222 [5.64]	.970 [24.64]	—	—	—
31	1	.988 [25.10]	.177 [4.50]	—	—	—	—
	2	.962 [24.43]	.177 [4.50]	1.120 [28.45]	—	—	—
	3	.988 [25.10]	.222 [5.64]	—	—	—	—
	4	.934 [23.72]	.222 [5.64]	1.120 [28.45]	—	—	—
37	1	1.138 [28.91]	.177 [4.50]	—	—	—	—
	2	1.112 [28.24]	.177 [4.50]	1.270 [32.26]	—	—	—
	3	1.138 [28.91]	.222 [5.64]	—	—	—	—
	4	1.084 [27.53]	.222 [5.64]	1.270 [32.26]	—	—	—
51	1	1.088 [27.64]	.224 [5.69]	—	—	—	—
	2	1.062 [26.97]	.224 [5.69]	1.220 [30.99]	—	—	—
	3	1.088 [27.64]	.264 [6.71]	—	—	—	—
	4	1.034 [26.26]	.264 [6.71]	1.220 [30.99]	—	—	—

Notes: Front mounting preferred.

Items in bold italic are qualified to MIL-PRF-83513.

Mounting and Coupling Hardware

For Screw Mount MCK,
MCD and MCDM

9-51 Contacts
Slot Head

(K)
(KM)



**Jackscrew Assembly
High Profile**
(K) 096-0002-0010
M83513/5-06
(KM) 096-0002-0084

(L)
(LM)



**Jackscrew Assembly
Low Profile**
(L) 096-0002-0011
M83513/5-05
(LM) 096-0002-0085

(P)



Jackpost Assembly
(P) 096-0002-0009
M83513/5-07
P mates with K,KM, L,LM, Q,QM and R,RM Jackscrew Assemblies.

9-51 Contacts
1/16" Allen Head

(Q)
(QM)



**Jackscrew Assembly
High Profile**
(Q) 096-0002-0014
M83513/5-03
(QM) 096-0002-0086

(R)
(RM)



**Jackscrew Assembly
Low Profile**
(R) 096-0002-0015
M83513/5-02
(RM) 096-0002-0087

Notes:

1. Jackpost Assemblies will accommodate .094 [2.39] max. thickness panel.
2. Letter(s) in parentheses is to assist in ordering hardware with the connector (See "How To Specify" page 110).
3. Single letters (e.g. K) designate hardware that meets M83513/5 requirements except the material is 303 stainless steel, passivated.
4. Add M suffix (e.g. KM) to designate hardware that meets all M83513/5 requirements. Material is corrosion resistant steel, non-magnetic, 125,000 PSI tensile strength minimum (Applies to jackscrews only).
5. Hardware ordered separately should be ordered in pairs; i.e. 2 pcs. P/N 096-0002-0009 per connector half.
6. **Items in bold italic are qualified to MIL-PRF-83513.**

100 Contacts
Slot Head

(H)
(HM)



**Jackscrew Assembly
High Profile**
(H) 096-0002-0061
M83513/5-16
(HM) 096-0002-0088

(J)
(JM)



**Jackscrew Assembly
Low Profile**
(J) 096-0002-0062
M83513/5-15
(JM) 096-0002-0089

100 Contacts
1/16" Allen Head

(T)
(TM)



**Jackscrew Assembly
High Profile**
(T) 096-0002-0064
M83513/5-13
(TM) 096-0002-0090

(N)
(NM)



**Jackscrew Assembly
Low Profile**
(N) 096-0002-0065
M83513/5-12
(NM) 096-0002-0091

(S)



Jackpost Assembly
(S) 096-0002-0060
M83513/5-17
S mates with H,HM, J,JM, T,TM and N,NM Jackscrew Assemblies.

3 Pin and Socket Connectors

Mounting and Coupling Hardware (Continued)


For Screw Mount MCK,
MCD and MCDM (Continued)

Slot Head
(X)



Lockscrew Assembly
096-0002-0008

1/16" Allen Head
(Y)



Lockscrew Assembly
096-0002-0013

For Clip Mount — MCD


(Z)



Mounting Key and Clip
P/N 096-0001-0000
(2 Required)

For Float Mount — MCK,
MCD and MCDM

(F)




Float Mount Bushing
(Factory Installed)

Notes:

1. Jackpost Assemblies will accommodate .094 [2.39] max. thickness panel.
2. Letter(s) in parentheses is to assist in ordering hardware with the connector (See "How To Specify" page 110).
3. Hardware ordered separately should be ordered in pairs; i.e. 2 pcs. P/N 096-0002-0013 per connector half.


MCK Transition Blocks

RT1 — Right Angle Termination Configuration




MIL-PRF-83513/10 through /21 configurations. 90° — Lo Profile termination configurations.

See pages 137 & 138 for M83513/cross references.

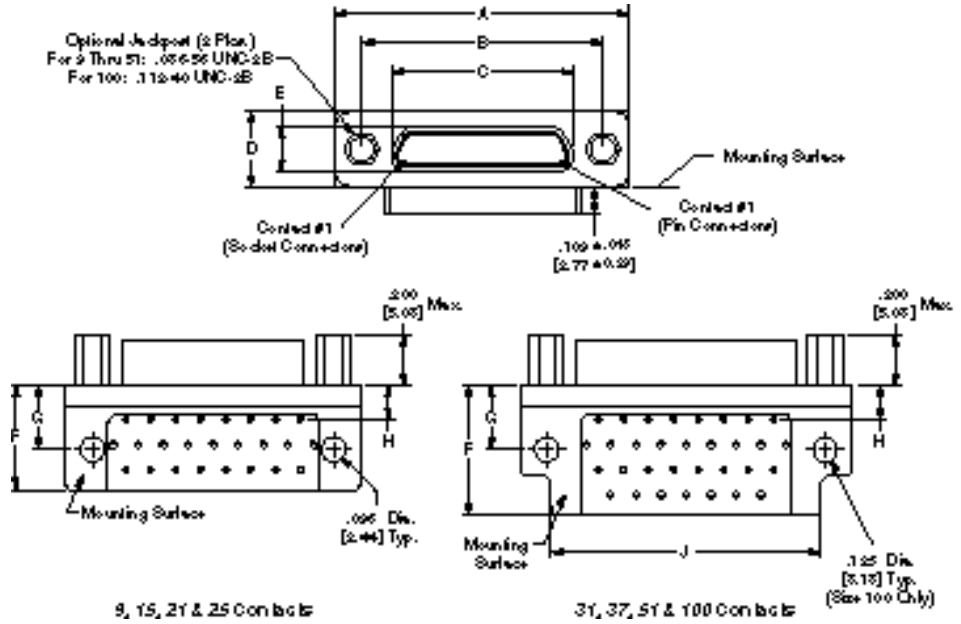

3
Pin and Socket Connectors

How To Specify

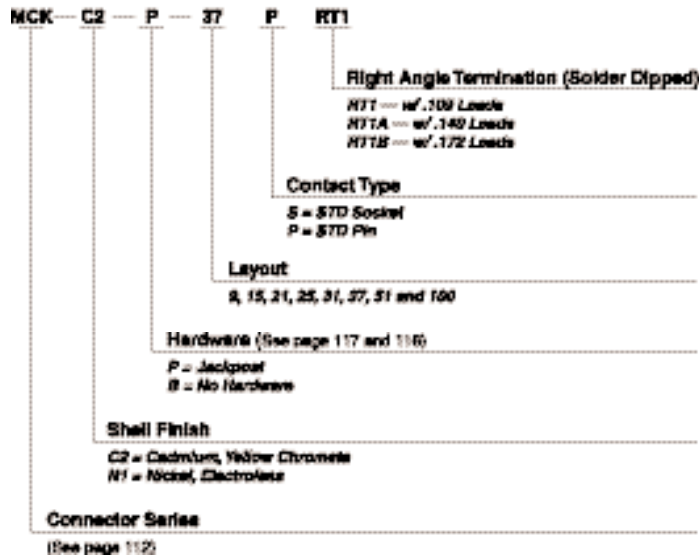

Notes:

1. For terminal identification see page 121.
2. Grid pattern for all configurations is .100 x .100 [2.54 x 2.54].
3. Wire lengths shown are for RT1.
4. **Items in bold italic are qualified to MIL-PRF-83513.**

MCK Transition Blocks (Continued)

RT1 — Right Angle Termination Configuration

(Continued)

Part Number	A Max.	B ± .005 [.127]	C Max.	D Max.	E Max.	F Max.	G +.010 [.254]	H +.010 [.254]	J Max.
<i>MCK-**-*- 9PRTI</i>	.785 19.94	.565 14.35	.333 8.46	.308 7.83	.184 4.68	.420 10.67	.250 6.35	.230 5.84	—
<i>MCK-**-*- 9SRTI</i>	.785 19.94	.565 14.35	.402 10.22	.308 7.83	.250 6.35	.420 10.67	.250 6.35	.230 5.84	—
<i>MCK-**-*- 15PRTI</i>	.935 23.75	.715 18.16	.483 12.27	.308 7.83	.184 4.68	.420 10.67	.250 6.35	.130 3.30	—
<i>MCK-**-*- 15SRTI</i>	.935 23.75	.715 18.16	.552 14.03	.308 7.83	.250 6.35	.420 10.67	.250 6.35	.130 3.30	—
<i>MCK-**-*- 21PRTI</i>	1.085 27.56	.865 21.97	.633 16.08	.308 7.83	.184 4.68	.420 10.67	.250 6.35	.130 3.30	—
<i>MCK-**-*- 21SRTI</i>	1.085 27.56	.865 21.97	.702 17.84	.308 7.83	.250 6.35	.420 10.67	.250 6.35	.130 3.30	—
<i>MCK-**-*- 25PRTI</i>	1.185 30.10	.965 24.51	.733 18.62	.308 7.83	.184 4.68	.420 10.67	.250 6.35	.130 3.30	—
<i>MCK-**-*- 25SRTI</i>	1.185 30.10	.965 24.51	.802 20.38	.308 7.83	.250 6.35	.420 10.67	.250 6.35	.130 3.30	—
<i>MCK-**-*- 31PRTI</i>	1.335 33.91	1.115 28.32	.883 22.43	.308 7.83	.184 4.68	.520 13.21	.250 6.35	.130 3.30	1.085 27.56
<i>MCK-**-*- 31SRTI</i>	1.335 33.91	1.115 28.32	.952 24.19	.308 7.83	.250 6.35	.520 13.21	.250 6.35	.130 3.30	1.085 27.56
<i>MCK-**-*- 37PRTI</i>	1.485 37.72	1.265 32.13	1.033 26.24	.308 7.83	.184 4.68	.520 13.21	.250 6.35	.130 3.30	1.185 30.10
<i>MCK-**-*- 37SRTI</i>	1.485 37.72	1.265 32.13	1.102 28.00	.308 7.83	.250 6.35	.520 13.21	.250 6.35	.130 3.30	1.185 30.10
<i>MCK-**-*- 51PRTI</i>	1.435 36.45	1.215 30.86	.983 24.97	.351 8.92	.227 5.77	.650 16.51	.300 7.62	.150 3.81	1.225 31.88
<i>MCK-**-*- 51SRTI</i>	1.435 36.45	1.215 30.86	1.052 26.73	.351 8.92	.295 7.50	.650 16.51	.300 7.62	.150 3.81	1.225 31.88
<i>MCK-**-*- 100PRTI</i>	2.170 55.12	1.800 45.72	1.383 35.13	.394 10.01	.270 6.86	1.000 25.40	.400 10.16	.200 5.08	1.815 46.11
<i>MCK-**-*- 100SRTI</i>	2.170 55.12	1.800 45.72	1.508 38.31	.394 10.01	.394 10.01	1.000 25.40	.400 10.16	.200 5.08	1.815 46.11

P = Pin, S = Socket


Note: Items in bold italic are qualified to MIL-PRF-83513.

MCK Transition Blocks (Continued)

RT1 — Right Angle Termination Configuration

(Continued)


View is from mounting surface of connector. Plug configuration shown. For receptacle, use mirror image. (Except 100 contacts)

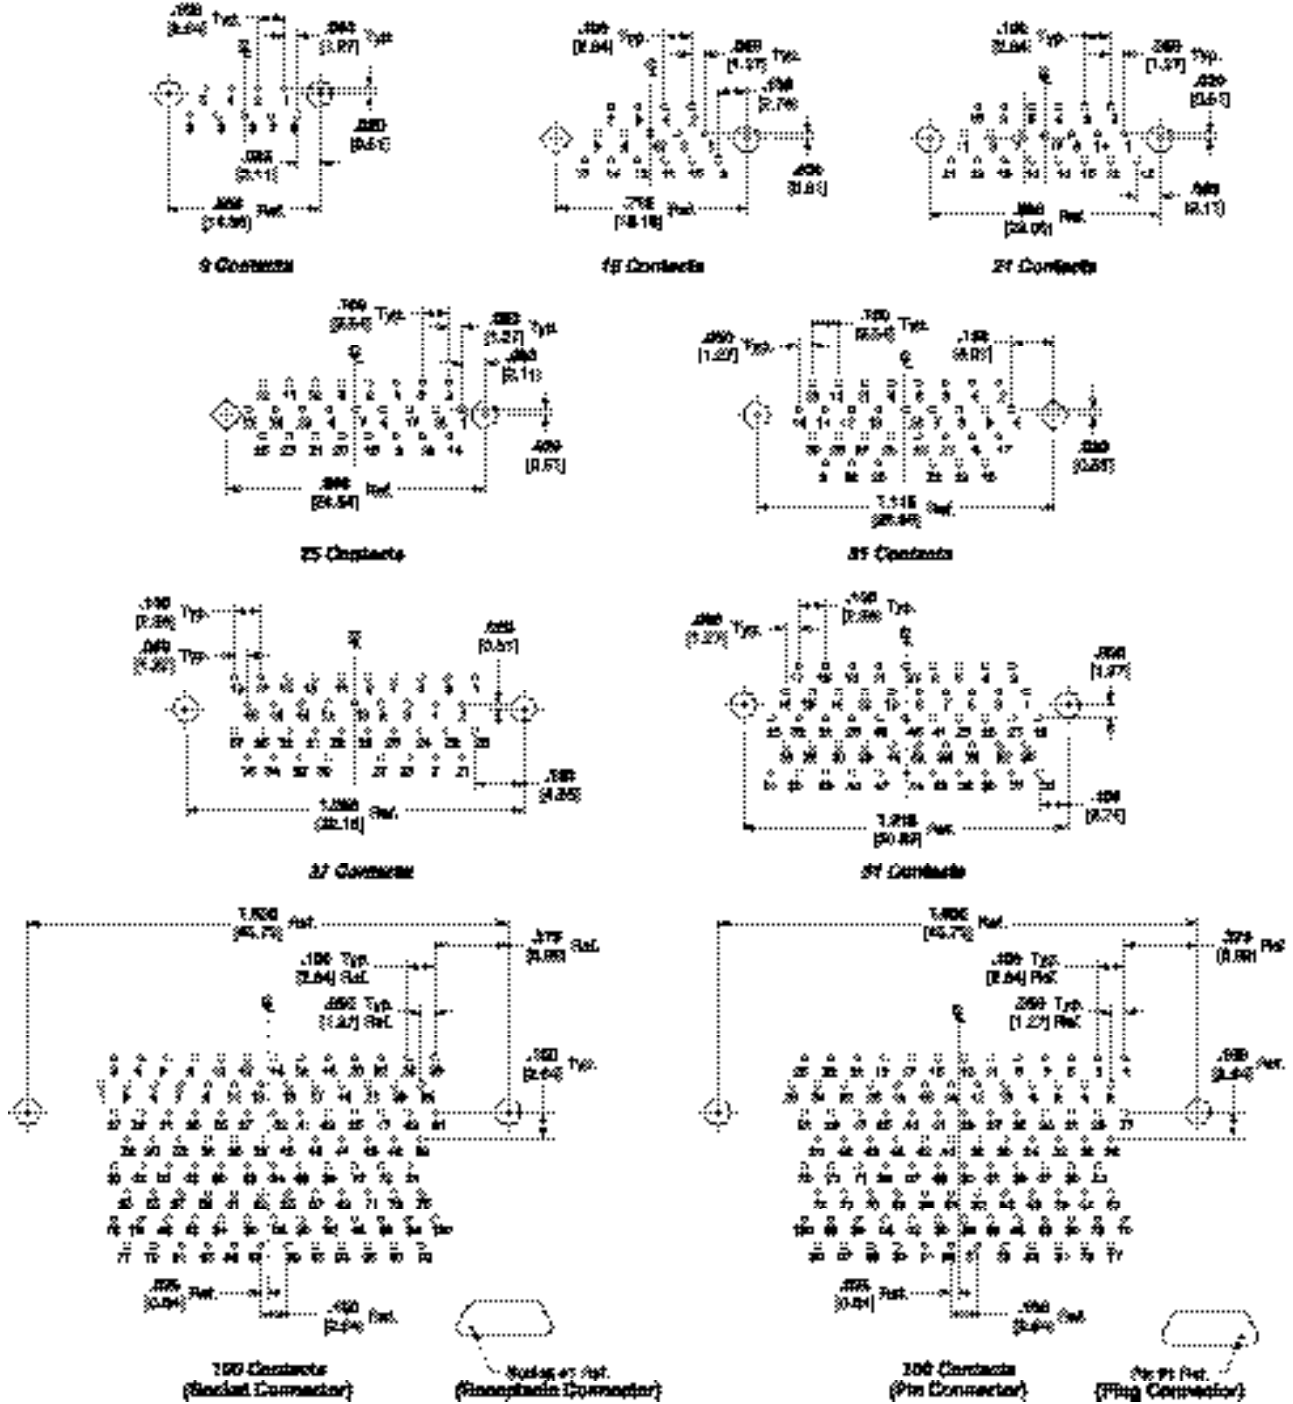


3
Pin and Socket Connectors

MCK Transition Blocks (Continued)


ST1 — Straight Termination Configuration



MIL-PRF-83513/22 through /27 configurations. 180° — Lo Profile termination configurations.
See page 138 for M83513/cross references.

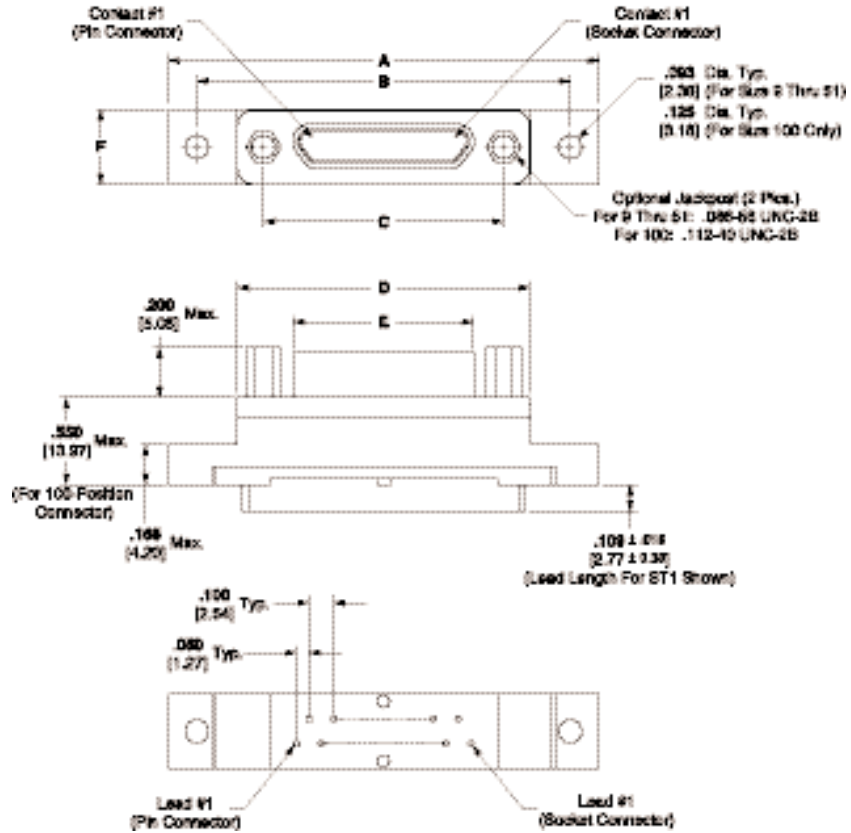

How To Specify

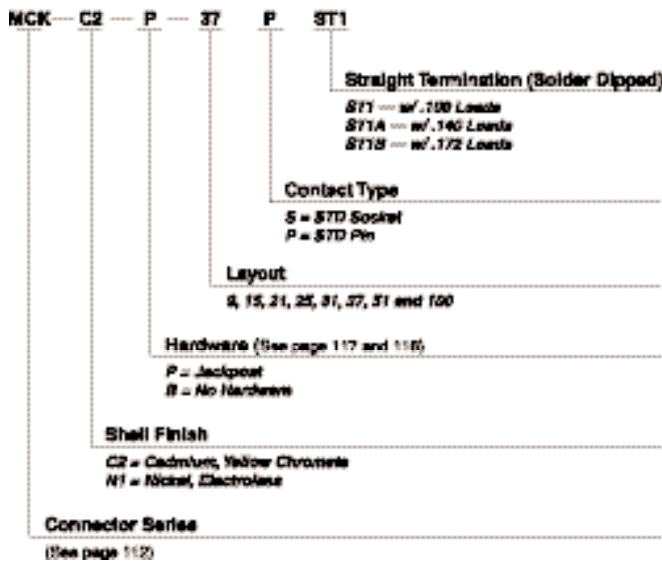

Notes:

1. For terminal identification see page 124.
2. Grid pattern for all configurations is .100 x .100 [2.54 x 2.54].
3. Wire lengths shown are for ST1.
4. **Items in bold italic are qualified to MIL-PRF-83513.**

MCK Transition Blocks (Continued)

ST1 — Straight Termination Configuration (Continued)

Part Number	A Max.	B ± .005 [.127]	C ± .005 [.127]	D Max.	E Max.	F Max.	G Max.
<i>MCK-**-*- 9PSTI</i>	1.390 35.31	1.150 29.21	.565 14.35	.785 19.94	.333 8.46	.308 7.83	.184 4.68
<i>MCK-**-*- 9SSTI</i>	1.390 35.31	1.150 29.21	.565 14.35	.785 19.94	.402 10.22	.308 7.83	.250 6.35
<i>MCK-**-*- 15PSTI</i>	1.390 35.31	1.150 29.21	.715 18.16	.935 23.75	.483 12.27	.308 7.83	.184 4.68
<i>MCK-**-*- 15SSTI</i>	1.390 35.31	1.150 29.21	.715 18.16	.935 23.75	.552 14.03	.308 7.83	.250 6.35
<i>MCK-**-*- 21PSTI</i>	1.690 42.93	1.450 36.83	.865 21.97	1.085 27.56	.633 16.08	.308 7.83	.184 4.68
<i>MCK-**-*- 21SSTI</i>	1.690 42.93	1.450 36.83	.865 21.97	1.085 27.56	.702 17.84	.308 7.83	.250 6.35
<i>MCK-**-*- 25PSTI</i>	1.740 44.20	1.500 38.10	.965 24.51	1.185 30.10	.733 18.62	.308 7.83	.184 4.68
<i>MCK-**-*- 25SSTI</i>	1.740 44.20	1.500 38.10	.965 24.51	1.185 30.10	.802 20.38	.308 7.83	.250 6.35
<i>MCK-**-*- 31PSTI</i>	2.040 51.82	1.800 45.72	1.115 28.32	1.335 33.91	.883 22.43	.308 7.83	.184 4.68
<i>MCK-**-*- 31SSTI</i>	2.040 51.82	1.800 45.72	1.115 28.32	1.335 33.91	.952 24.19	.308 7.83	.250 6.35
<i>MCK-**-*- 37PSTI</i>	2.340 59.44	2.100 53.34	1.265 32.13	1.485 37.72	1.033 26.24	.308 7.83	.184 4.68
<i>MCK-**-*- 37SSTI</i>	2.340 59.44	2.100 53.34	1.265 32.13	1.485 37.72	1.102 28.00	.308 7.83	.250 6.35
<i>MCK-**-*- 51PSTI</i>	2.270 57.66	2.000 50.80	1.215 30.86	1.435 36.45	.983 24.97	.351 8.92	.227 5.77
<i>MCK-**-*- 51SSTI</i>	2.270 57.66	2.000 50.80	1.215 30.86	1.435 36.45	1.052 26.73	.351 8.92	.295 7.50
<i>MCK-**-*- 100PSTI</i>	3.070 77.98	2.800 71.12	1.800 45.72	2.170 55.12	1.383 35.13	.394 10.01	.270 6.86
<i>MCK-**-*- 100SSTI</i>	3.070 77.98	2.800 71.12	1.800 45.72	2.170 55.12	1.508 38.31	.394 10.01	.394 10.01


P = Pin, S = Socket

Note: Items in bold italic are qualified to MIL-PRF-83513.

MCK Transition Blocks (Continued)


ST1 — Straight Termination Configuration (Continued)

View is from mounting surface of connector. Plug configuration shown. For receptacle, use mirror image.

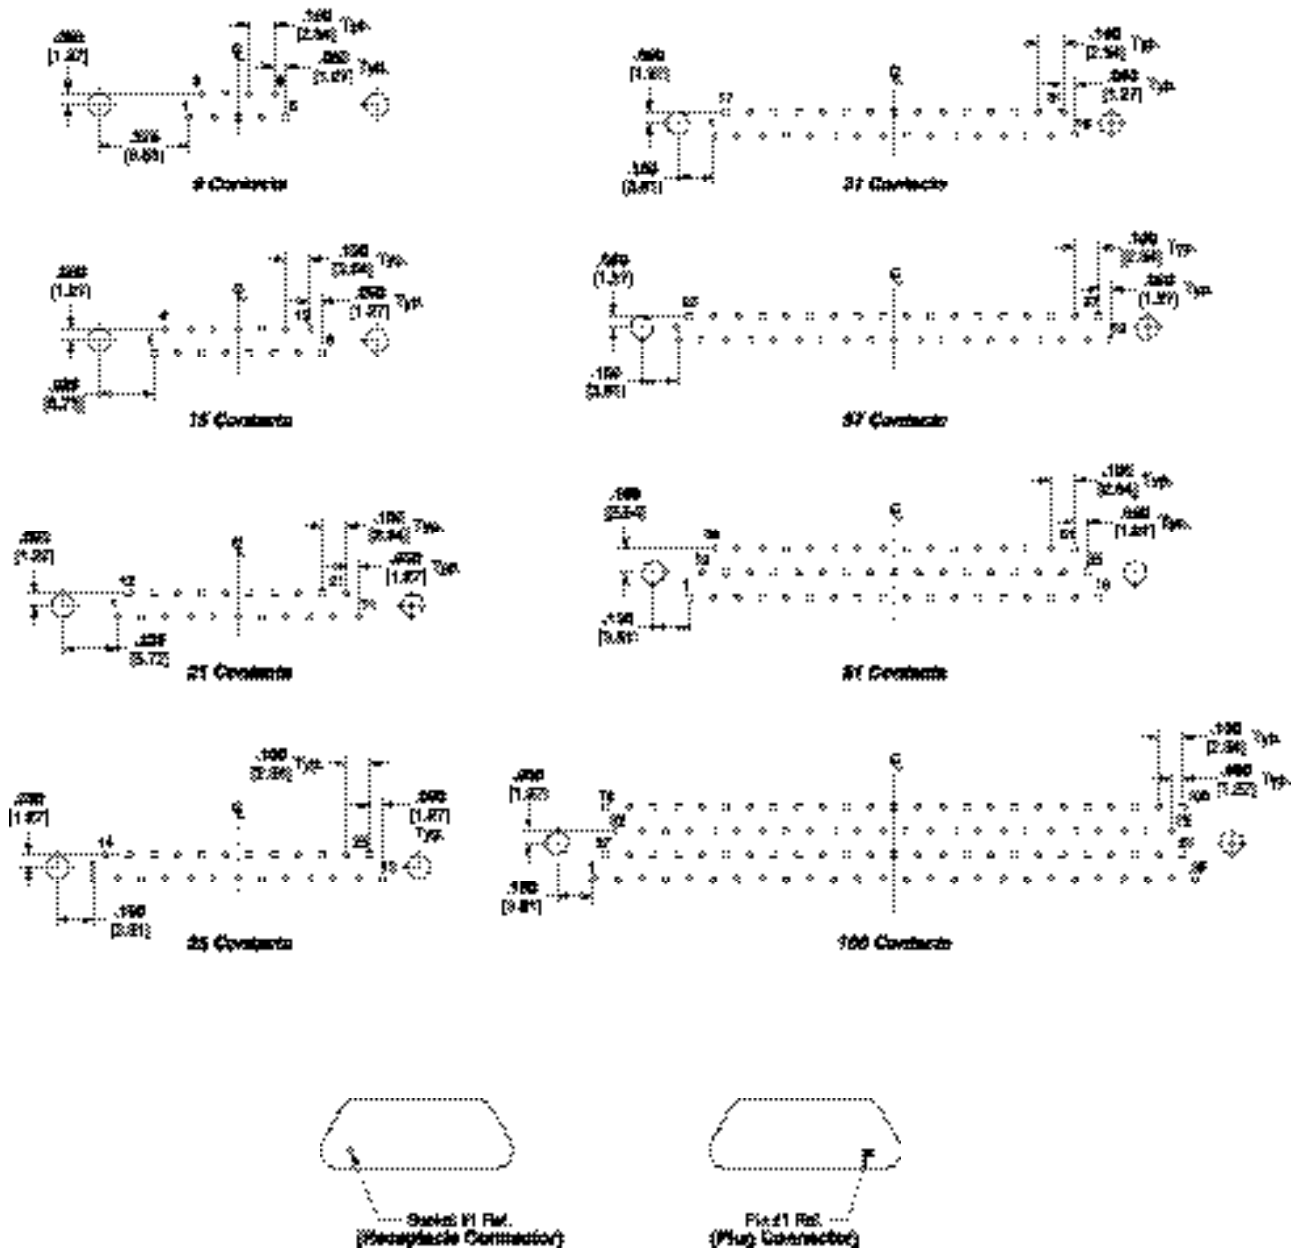


MCK ST2 Series Straight Mount PCB Connectors

MCK with Cactus Bend Termination



- Meets MIL-PRF-83513 Performance
- Single metal shell with no Transition Block
- Low profile and light weight
- .100 [2.54] x .075 [1.91] grid pattern
- Design allows lower cost construction

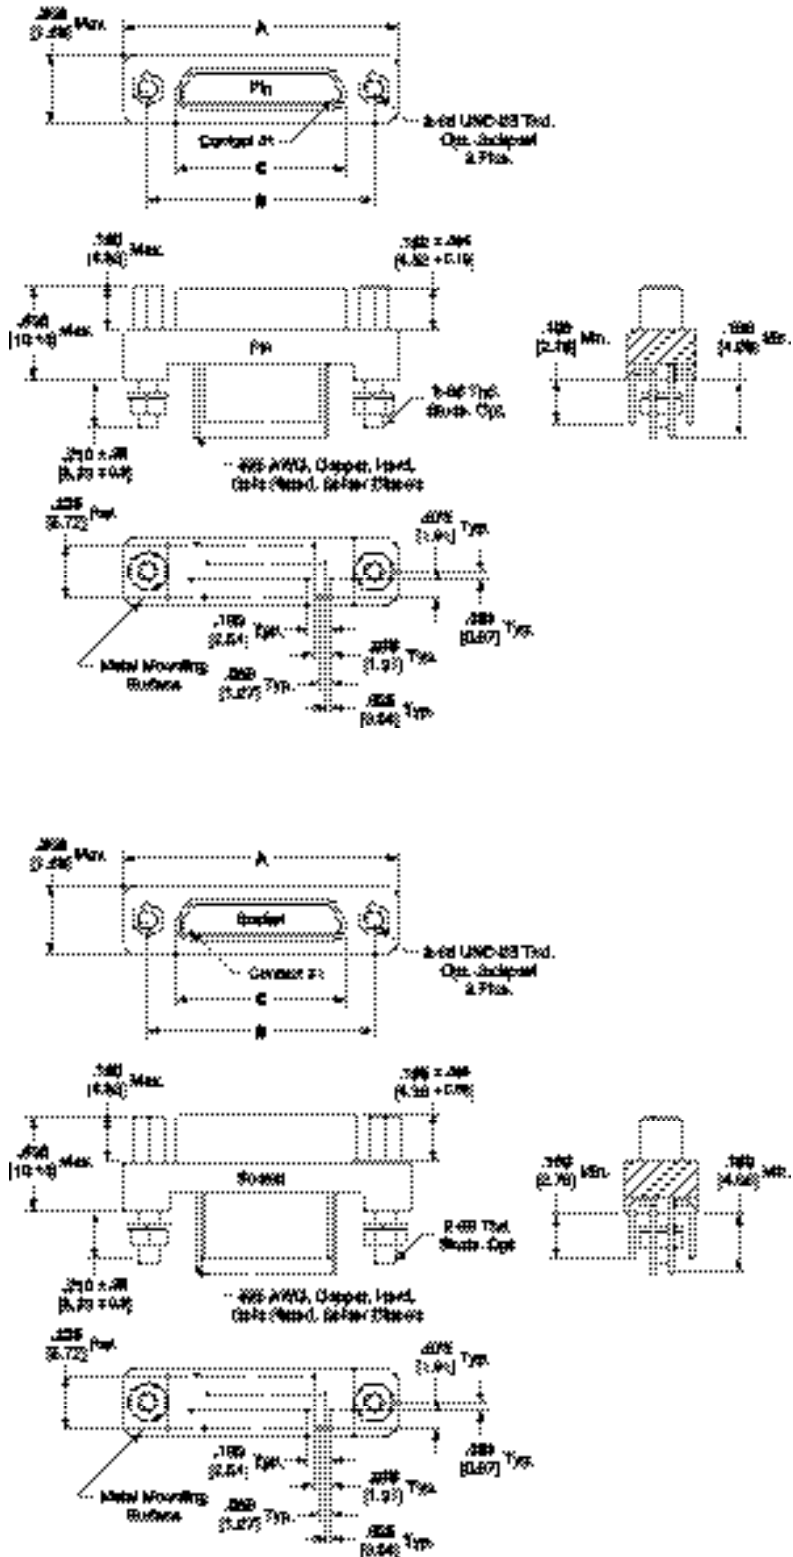


3
Pin and Socket Connectors

MCK ST2 Series Straight Mount PCB Connectors (Continued)

Part Number	A Max.	B ± .005	C Max.
MCK-**-*- 9 PST2	.785 19.94	.565 14.35	.333 8.46
MCK-**-*- 9 SST2	.785 19.94	.565 14.35	.402 10.21
MCK-**-*- 15 PST2	.935 23.75	.715 18.16	.483 12.27
MCK-**-*- 15 SST2	.935 23.75	.715 18.16	.552 14.02
MCK-**-*- 21 PST2	1.085 27.56	.865 21.97	.633 16.08
MCK-**-*- 21 SST2	1.085 27.56	.865 21.97	.702 17.83
MCK-**-*- 25 PST2	1.185 30.10	.965 24.51	.733 18.62
MCK-**-*- 25 SST2	1.185 30.10	.965 24.51	.802 20.37
MCK-**-*- 31 PST2	1.335 33.91	1.115 28.32	.883 22.43
MCK-**-*- 31 SST2	1.335 33.91	1.115 28.32	.952 24.18
MCK-**-*- 37 PST2	1.485 37.72	1.265 32.13	1.033 26.24
MCK-**-*- 37 SST2	1.485 37.72	1.265 32.13	1.102 27.99



How To Specify

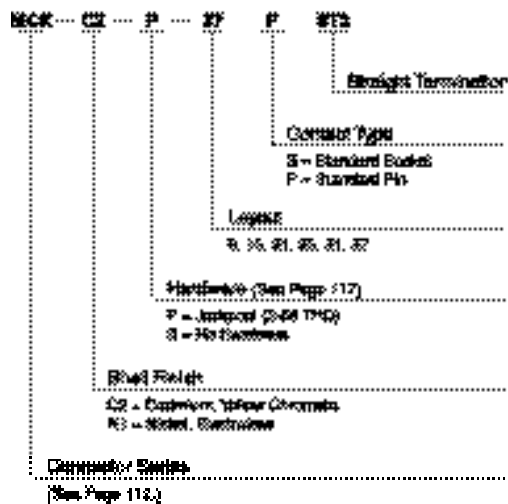

MCK ST2 Series Straight Mount PCB Connectors (Continued)

View is from mounting surface of socket connector

View is from mounting surface of pin connector

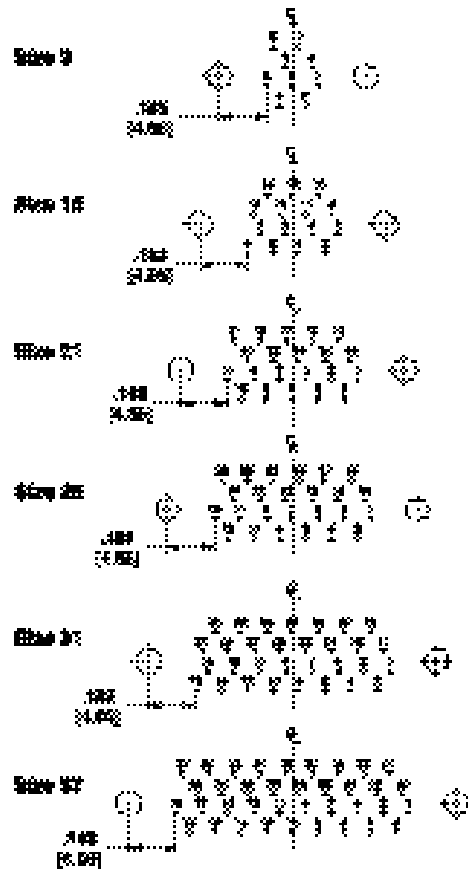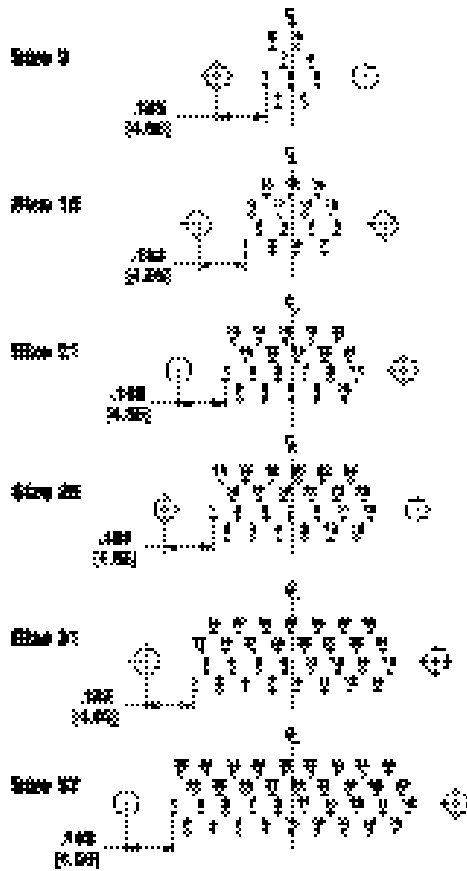

MCDM Series Metal Shell Connectors

Technical & Performance Data

Performance

Contact Resistance — The average mated contact resistance is 4 milliohms, with a maximum value of 8 milliohms, using standard #24 solid copper leads when measured directly behind the crimp joints of the mated pin and socket contacts. The average resistance value at 100 microvolts is 4.8 milliohms.

Dielectric Withstanding Voltage (60 Hz rms room temperature) — 750 VAC at sea level; 200 VAC at 70,000 feet [21,336 m].

Vibration (Per MIL-STD-202C, Method 204-A, Condition D) — No discontinuity in excess of 1 microsecond during twelve 20 minute sweeps from 10 to 2,000 CPS at .06 double amplitude or 20 G forces, whichever is less.

Corrosion Resistance (Per MIL-STD-202C, Method 101B, Condition B) — Both mated and

unmated samples do not exceed the maximum allowable contact resistance (8 milliohms) when subjected to the 48 hour salt spray test.

Durability — The contact resistance after 500 mating cycles is less than the maximum allowable, 8 milliohms.

Insulation Resistance — Greater than 5,000 megohms at room temperature for the materials listed under "Materials".

Maximum Current Carrying Capacity — No. 24 contact, 3 amperes. It must be recognized, however, that all the wires to a connector will not carry their maximum current under all environmental conditions due to wire temperature.

Contact Engaging and Separation Forces — 6 oz. [1.67N] maximum (eng.); 0.5 oz. [.14N] minimum (sep.).

Temperature Range (Operating) — Diallyl phthalate -55°C to +125°C.

Materials

Insulator — Diallyl phthalate per MIL-M-14, Type SDG-F.

Contacts — Pin Contact: Copper alloy and beryllium copper alloy make up the complete construction. Socket Contact: Copper alloy.

Body Shell — High grade aluminum alloy.

Finishes

Contacts — Standard finish is 0.000050 [0.00127] gold over copper flash per MIL-G-45204, Type II.

Body Shell — Electroless nickel per AMS 2404.

Note:


Insulators are molded into their metal shells — No bonded joint is used.

Screw Mount



The only metal shell connector that mates with all existing plastic types. This line is ideal for external use and other applications requiring frequent disconnect and remating. When durability and reliability are paramount the metal shell connector is unsurpassed — it eliminates the need for retrofitting where new metal shell varieties must mate with older plastic types.


Originally designed for military applications, they are currently used for commercial requirements, including computers.

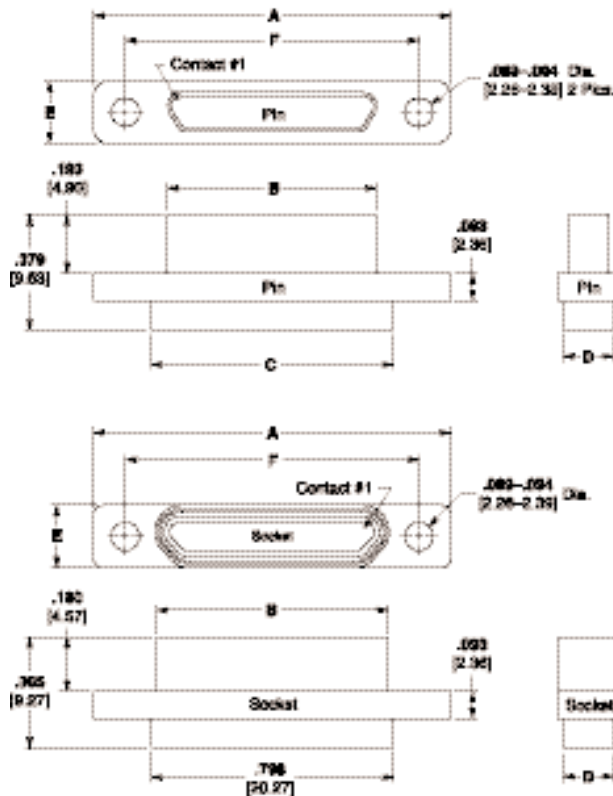

MCDM Series Metal Shell Connectors (Continued)

Screw Mount (Continued)

How To Specify

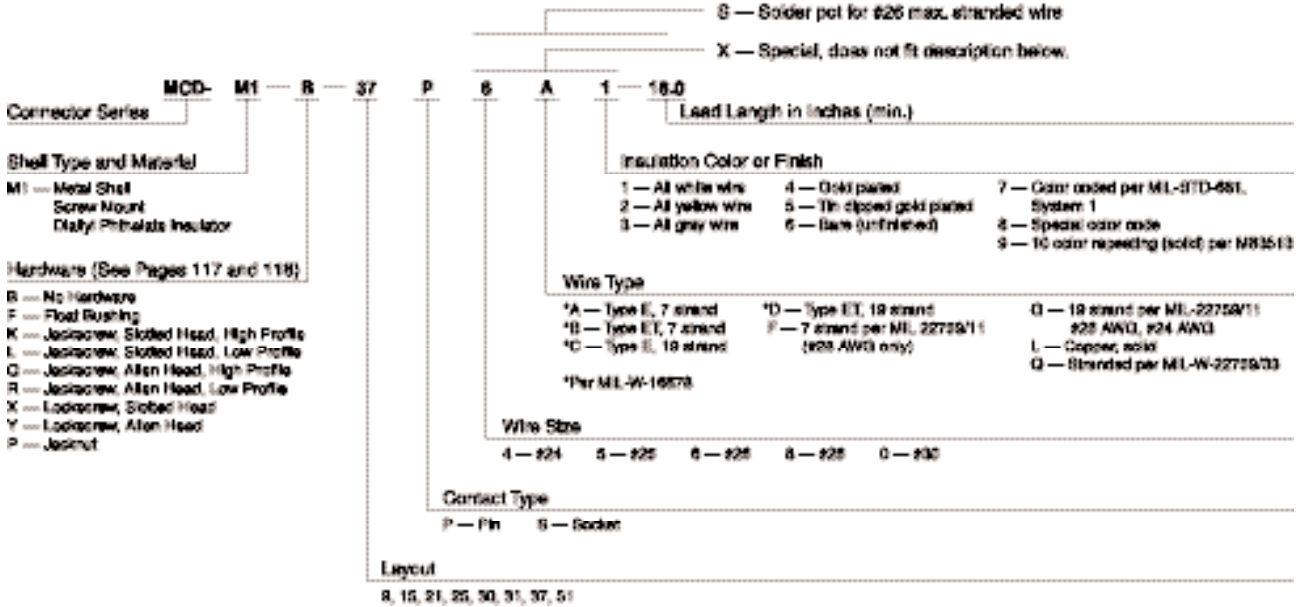

3 Pin and Socket Connectors

Part Number	A ± .005 [±.127]	B ± .005 [±.127]	C ± .010 [±.254]	D ± .010 [±.254]	E ± .005 [±.127]	F ± .005 [±.127]	Avg. Weight lbs. ± 5% [grams]
MCDM1-9P***	.780 19.81	.290 7.36	.398 10.11	.165 4.19	.208 5.28	.565 14.35	.003 1.36
MCDM1-9S***	.780 19.81	.365 9.27	.398 10.11	.165 4.19	.208 5.28	.565 14.35	.003 1.36
MCDM1-15P***	.930 23.62	.440 11.18	.548 13.92	.165 4.19	.208 5.28	.715 18.16	.004 1.81
MCDM1-15S***	.930 23.62	.515 13.08	.548 13.92	.165 4.19	.208 5.28	.715 18.16	.004 1.81
MCDM1-21P***	1.080 27.43	.590 14.99	.698 17.73	.165 4.19	.208 5.28	.865 21.97	.005 2.26
MCDM1-21S***	1.080 27.43	.665 16.89	.698 17.73	.165 4.19	.208 5.28	.865 21.97	.005 2.26
MCDM1-25P***	1.180 29.97	.690 17.53	.798 20.27	.165 4.19	.208 5.28	.965 24.51	.006 2.72
MCDM1-25S***	1.180 29.97	.765 19.43	.798 20.27	.165 4.19	.208 5.28	.965 24.51	.006 2.26
MCDM1-30P***	.930 23.62	.435 11.05	.548 13.92	.252 6.40	.295 7.49	.715 18.16	.007 3.17
MCDM1-30S***	.930 23.62	.515 13.08	.548 13.92	.252 6.40	.295 7.49	.715 18.16	.007 3.17
MCDM1-31P***	1.330 33.78	.840 21.34	.948 16.46	.165 4.19	.208 5.28	1.115 28.32	.007 3.17
MCDM1-31S***	1.330 33.78	.915 23.24	.948 16.46	.165 4.19	.208 5.28	1.115 28.32	.006 2.72
MCDM1-37P***	1.480 37.59	.990 25.15	1.098 27.89	.165 4.19	.208 5.28	1.270 32.26	.007 3.17
MCDM1-37S***	1.480 37.59	1.065 27.05	1.098 27.89	.165 4.19	.208 5.28	1.270 32.26	.007 3.17
MCDM1-51P***	1.430 36.32	.940 23.88	1.048 26.62	.208 5.28	.250 6.35	1.215 30.86	.009 4.08
MCDM1-51S***	1.430 36.32	1.015 25.78	1.048 26.62	.208 5.28	.250 6.35	1.215 30.86	.008 3.62

Note: Weight given is with .500 [12.7] uninsulated, solid, 24 AWG gold plated copper pigtails.

MCDM Series Metal Shell RF COMBOMATE Connectors


Screw Mount Coaxial Terminations

Available *now* — RF Performance in standard subminiature rectangular connectors, with VSWR values of 1.01 to 1.10 in frequencies ranging in DC to 2.3 GHz. This is the COMBOMATE Connector.

This series of connectors incorporates the same metal shells and twist pin contacts used in the widely accepted, high reliability, MCDM Series.

The RF COMBOMATE Connector Series will accommodate RG 196 A/U or RG 178 B/U coaxial cable terminated in a unique manner in standard, already tooled insert layouts. This feature results in savings in cost, time and space.

The RF COMBOMATE Connector Series will accommodate a maximum of 17 RG 196 A/U or RG 178 B/U cables in an area of less than .225 sq. inches [14.51 mm²]. Mixed layouts with coaxial terminations and standard AWG 24, 26 and 28 are also immediately available in 7 different shell sizes. The overall envelope and mounting dimensions of equivalent size of COMBOMATE Connectors are exactly the same as the standard MCDM Series.

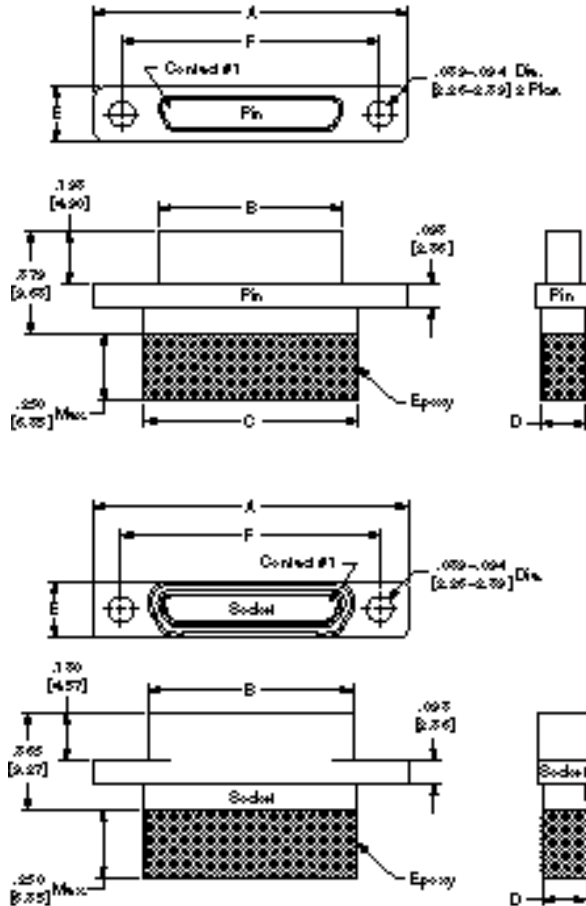

Performance Data — Coaxial Terminations

Impedance — 49.0 to 51.0 Ohms.

Voltage Standing Wave Ratio (VSWR) — 1.01:1 to 1.10:1 at frequency ranging in DC to 2.3 GHz.

Dielectric Withstanding Voltage (60 Hz rms room temperature) —
750 VAC at sea level;
200 VAC at 70,000 feet.

	(Actual Test Data) Crosstalk (Between Adjacent Lines)			
	1 to 2	2 to 3	3 to 4	4 to 5
30 MHz	60.0 db	59.8 db	60.7 db	60.0 db
100 MHz	49.1 db	48.3 db	51.7 db	50.6 db
175 MHz	42.6 db	41.4 db	47.2 db	47.0 db
500 MHz	38.0 db	38.8 db	39.5 db	40.0 db
1000 MHz	31.6 db	32.0 db	30.0 db	32.5 db
2000 MHz	22.4 db	22.5 db	22.3 db	20.8 db
3000 MHz	21.5 db	23.9 db	21.4 db	24.2 db


	Insertion Loss				
	#1	#2	#3	#4	#5
30 MHz	.08 db	.08 db	.08 db	.08 db	.08 db
100 MHz	.24 db	.24 db	.25 db	.25 db	.25 db
175 MHz	.35 db	.36 db	.36 db	.34 db	.32 db
500 MHz	.58 db	.50 db	.60 db	.58 db	.48 db
1000 MHz	1.25 db	1.33 db	1.36 db	1.35 db	1.24 db
2000 MHz	1.48 db	1.71 db	1.42 db	1.40 db	1.45 db
3000 MHz	2.66 db	2.45 db	2.74 db	2.86 db	2.84 db

Note: Verification of all test data is on file at Tyco Electronics and is available upon request.
All test runs using RG 196 A/U.

MCDM Series Metal Shell RF COMBOMATE Connectors (Continued)

Screw Mount Coaxial Terminations (Continued)

How To Specify

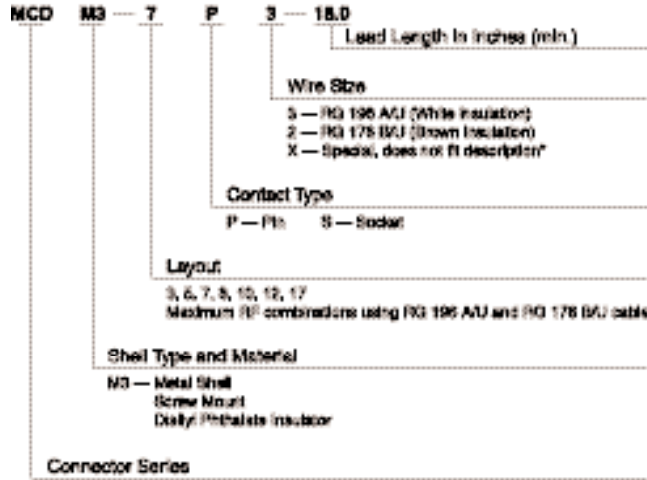


***Ordering Criteria:** A wide variety of contact combinations, coaxial and power mixed, are available. Contact Tyco Electronics for additional arrangement numbers.

Part Number	A ± .005 [± .127]	B ± .005 [± .127]	C Max.	D Max.	E ± .005 [± .127]	F ± .005 [± .127]
MCDM3-3P**	.780 19.81	.290 7.36	.408 10.36	.200 5.08	.208 5.28	.565 14.35
MCDM3-3S**	.780 19.81	.365 9.27	.408 10.36	.200 5.08	.208 5.28	.565 14.35
MCDM3-5P**	.930 23.62	.440 11.18	.558 14.17	.200 5.08	.208 5.28	.715 18.16
MCDM3-5S**	.930 23.62	.515 13.08	.558 14.17	.200 5.08	.208 5.28	.715 18.16
MCDM3-7P**	1.080 27.43	.590 14.99	.708 17.98	.200 5.08	.208 5.28	.865 21.97
MCDM3-7S**	1.080 27.43	.665 16.89	.708 17.98	.200 5.08	.208 5.28	.865 21.97
MCDM3-8P**	1.180 29.97	.690 17.53	.808 20.52	.200 5.08	.208 5.28	.965 24.51
MCDM3-8S**	1.180 29.97	.765 19.43	.808 20.52	.200 5.08	.208 5.28	.965 24.51
MCDM3-10P**	1.330 33.78	.840 21.34	.958 24.33	.200 5.08	.208 5.28	1.115 28.32
MCDM3-10S**	1.330 33.78	.915 23.24	.958 24.33	.200 5.08	.208 5.28	1.115 28.32
MCDM3-12P**	1.480 37.59	.990 25.15	1.108 27.89	.200 5.08	.208 5.28	1.270 32.26
MCDM3-12S**	1.480 37.59	1.065 27.05	1.108 27.89	.200 5.08	.208 5.28	1.270 32.26
MCDM3-17P**	1.430 36.32	.940 23.88	1.058 26.87	.245 6.22	.250 6.35	1.215 30.86
MCDM3-17S**	1.430 36.32	1.015 25.78	1.058 26.87	.245 6.22	.250 6.35	1.215 30.86

MCDM Series Metal Shell RF COMBOMATE Connectors (Continued)


Contact Arrangement as Viewed from the Engaging Face of the Pin Side

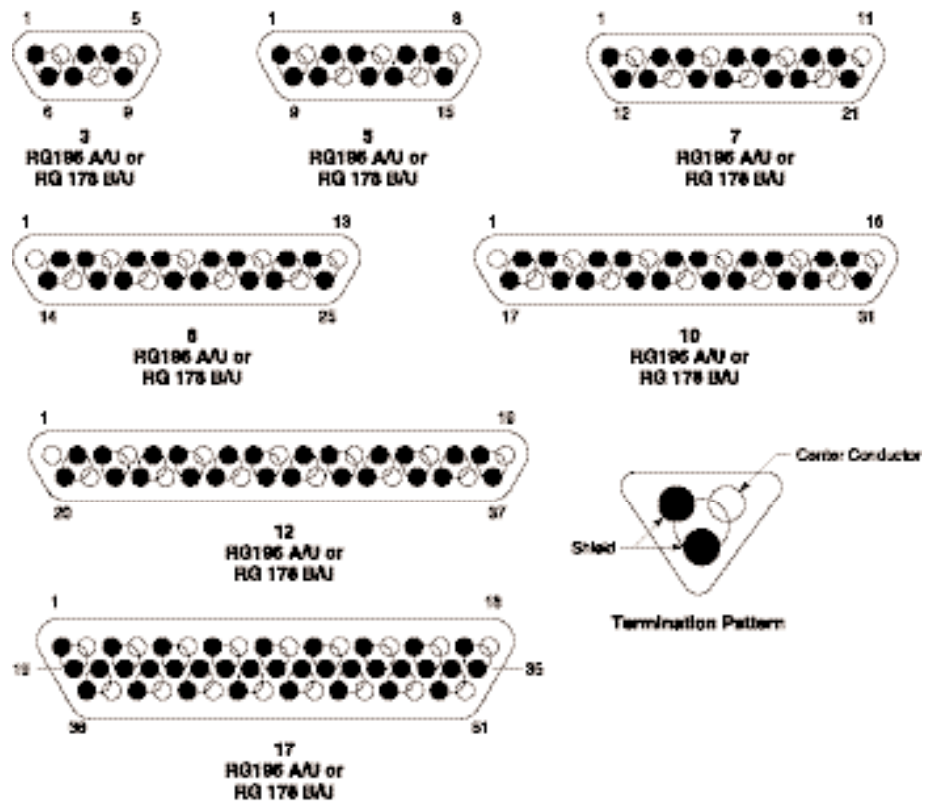

Note: The above contact arrangements are the maximum densities that can be obtained in each shell size when using RG 196 A/U or RG 178 B/U cable.

MCDM Series Metal Shell Connectors Panel Mounting — Cutout Dimensions

Panel Mounting
Dimensions — MCDM

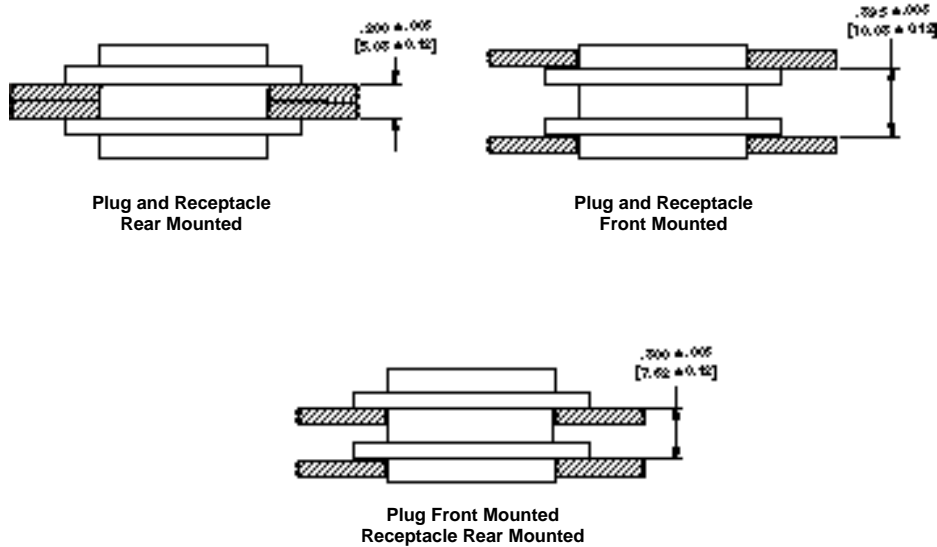

3
Pin and Socket Connectors

Panel Cutout Dimensions

Screw Mounting




Figure 1




Figure 2

Note: Front mounting preferred.

Number of Contacts	Fig.	A		B		C	
		+ .004 [+ .102]	- .000 [- .000]	+ .004 [+ .102]	- .000 [- .000]	+ .005 [+ .127]	- .000 [- .000]
9	1	.412 [10.46]		.177 [4.50]		.570 [14.48]	
	2	.384 [9.75]		.222 [5.64]		.570 [14.48]	
15	1	.562 [14.27]		.177 [4.50]		.720 [18.29]	
	2	.534 [13.56]		.222 [5.64]		.720 [18.29]	
21	1	.712 [18.08]		.177 [4.50]		.870 [22.10]	
	2	.684 [17.37]		.222 [5.64]		.870 [22.10]	
25	1	.812 [20.62]		.177 [4.50]		.970 [24.64]	
	2	.784 [19.91]		.222 [5.64]		.970 [24.64]	
31	1	.962 [24.43]		.177 [4.50]		1.120 [28.45]	
	2	.934 [23.72]		.222 [5.64]		1.120 [28.45]	
37	1	1.112 [28.24]		.177 [4.50]		1.270 [32.26]	
	2	1.084 [27.53]		.222 [5.64]		1.270 [32.26]	
51	1	1.062 [26.97]		.224 [5.69]		1.220 [30.99]	
	2	1.034 [26.26]		.264 [6.71]		1.220 [30.99]	

MIL-PRF-83513 Cross Reference

MCK (Metal Shell)

Military Part No.	MICRODOT Part No.	Military Part No.	MICRODOT Part No.	Military Part No.	MICRODOT Part No.
M83513/01-A*	MCK**-B- 9PS	M83513/03-E06*	MCK**-B- 31P5L4-1.0	M83513/03-A14*	MCK**-B- 9P6G9-72.0
M83513/01-B*	MCK**-B- 15PS	M83513/03-F06*	MCK**-B- 37P5L4-1.0	M83513/03-B14*	MCK**-B- 15P6G9-72.0
M83513/01-C*	MCK**-B- 21PS	M83513/03-G06*	MCK**-B- 51P5L4-1.0	M83513/03-C14*	MCK**-B- 21P6G9-72.0
M83513/01-D*	MCK**-B- 25PS	M83513/03-H06*	MCK**-B-100P5L4-1.0	M83513/03-D14*	MCK**-B- 25P6G9-72.0
M83513/01-E*	MCK**-B- 31PS	M83513/03-A07*	MCK**-B- 9P5L5-0.5	M83513/03-E14*	MCK**-B- 31P6G9-72.0
M83513/01-F*	MCK**-B- 37PS	M83513/03-B07*	MCK**-B- 15P5L5-0.5	M83513/03-F14*	MCK**-B- 37P6G9-72.0
M83513/01-G*	MCK**-B- 51PS	M83513/03-C07*	MCK**-B- 21P5L5-0.5	M83513/03-G14*	MCK**-B- 51P6G9-72.0
M83513/01-H*	MCK**-B-100PS	M83513/03-D07*	MCK**-B- 25P5L5-0.5	M83513/03-H14*	MCK**-B-100P6G9-72.0
M83513/02-A*	MCK**-B- 9SS	M83513/03-E07*	MCK**-B- 31P5L5-0.5	M83513/03-A15*	MCK**-B- 9P6Q1-72.0
M83513/02-B*	MCK**-B- 15SS	M83513/03-F07*	MCK**-B- 37P5L5-0.5	M83513/03-B15*	MCK**-B- 15P6Q1-72.0
M83513/02-C*	MCK**-B- 21SS	M83513/03-G07*	MCK**-B- 51P5L5-0.5	M83513/03-C15*	MCK**-B- 21P6Q1-72.0
M83513/02-D*	MCK**-B- 25SS	M83513/03-H07*	MCK**-B-100P5L5-0.5	M83513/03-D15*	MCK**-B- 25P6Q1-72.0
M83513/02-E*	MCK**-B- 31SS	M83513/03-A08*	MCK**-B- 9P5L5-1.0	M83513/03-E15*	MCK**-B- 31P6Q1-72.0
M83513/02-F*	MCK**-B- 37SS	M83513/03-B08*	MCK**-B- 15P5L5-1.0	M83513/03-F15*	MCK**-B- 37P6Q1-72.0
M83513/02-G*	MCK**-B- 51SS	M83513/03-C08*	MCK**-B- 21P5L5-1.0	M83513/03-G15*	MCK**-B- 51P6Q1-72.0
M83513/02-H*	MCK**-B-100SS	M83513/03-D08*	MCK**-B- 25P5L5-1.0	M83513/03-H15*	MCK**-B-100P6Q1-72.0
M83513/03-A01*	MCK**-B- 9P6G1-18.0	M83513/03-E08*	MCK**-B- 31P5L5-1.0	M83513/03-A16*	MCK**-B- 9P6Q9-72.0
M83513/03-B01*	MCK**-B- 15P6G1-18.0	M83513/03-F08*	MCK**-B- 37P5L5-1.0	M83513/03-B16*	MCK**-B- 15P6Q9-72.0
M83513/03-C01*	MCK**-B- 21P6G1-18.0	M83513/03-G08*	MCK**-B- 51P5L5-1.0	M83513/03-C16*	MCK**-B- 21P6Q9-72.0
M83513/03-D01*	MCK**-B- 25P6G1-18.0	M83513/03-H08*	MCK**-B-100P5L5-1.0	M83513/03-D16*	MCK**-B- 25P6Q9-72.0
M83513/03-E01*	MCK**-B- 31P6G1-18.0	M83513/03-A09*	MCK**-B- 9P6Q1-18.0	M83513/03-E16*	MCK**-B- 31P6Q9-72.0
M83513/03-F01*	MCK**-B- 37P6G1-18.0	M83513/03-B09*	MCK**-B- 15P6Q1-18.0	M83513/03-F16*	MCK**-B- 37P6Q9-72.0
M83513/03-G01*	MCK**-B- 51P6G1-18.0	M83513/03-C09*	MCK**-B- 21P6Q1-18.0	M83513/03-G16*	MCK**-B- 51P6Q9-72.0
M83513/03-H01*	MCK**-B-100P6G1-18.0	M83513/03-D09*	MCK**-B- 25P6Q1-18.0	M83513/03-H16*	MCK**-B-100P6Q9-72.0
M83513/03-A02*	MCK**-B- 9P6G1-36.0	M83513/03-E09*	MCK**-B- 31P6Q1-18.0	M83513/04-A01*	MCK**-B- 9S6G1-18.0
M83513/03-B02*	MCK**-B- 15P6G1-36.0	M83513/03-F09*	MCK**-B- 37P6Q1-18.0	M83513/04-B01*	MCK**-B- 15S6G1-18.0
M83513/03-C02*	MCK**-B- 21P6G1-36.0	M83513/03-G09*	MCK**-B- 51P6Q1-18.0	M83513/04-C01*	MCK**-B- 21S6G1-18.0
M83513/03-D02*	MCK**-B- 25P6G1-36.0	M83513/03-H09*	MCK**-B-100P6Q1-18.0	M83513/04-D01*	MCK**-B- 25S6G1-18.0
M83513/03-E02*	MCK**-B- 31P6G1-36.0	M83513/03-A10*	MCK**-B- 9P6Q1-36.0	M83513/04-E01*	MCK**-B- 31S6G1-18.0
M83513/03-F02*	MCK**-B- 37P6G1-36.0	M83513/03-B10*	MCK**-B- 15P6Q1-36.0	M83513/04-F01*	MCK**-B- 37S6G1-18.0
M83513/03-G02*	MCK**-B- 51P6G1-36.0	M83513/03-C10*	MCK**-B- 21P6Q1-36.0	M83513/04-G01*	MCK**-B- 51S6G1-18.0
M83513/03-H02*	MCK**-B-100P6G1-36.0	M83513/03-D10*	MCK**-B- 25P6Q1-36.0	M83513/04-H01*	MCK**-B-100S6G1-18.0
M83513/03-A03*	MCK**-B- 9P6G9-18.0	M83513/03-E10*	MCK**-B- 31P6Q1-36.0	M83513/04-A02*	MCK**-B- 9S6G1-36.0
M83513/03-B03*	MCK**-B- 15P6G9-18.0	M83513/03-F10*	MCK**-B- 37P6Q1-36.0	M83513/04-B02*	MCK**-B- 15S6G1-36.0
M83513/03-C03*	MCK**-B- 21P6G9-18.0	M83513/03-G10*	MCK**-B- 51P6Q1-36.0	M83513/04-C02*	MCK**-B- 21S6G1-36.0
M83513/03-D03*	MCK**-B- 25P6G9-18.0	M83513/03-H10*	MCK**-B-100P6Q1-36.0	M83513/04-D02*	MCK**-B- 25S6G1-36.0
M83513/03-E03*	MCK**-B- 31P6G9-18.0	M83513/03-A11*	MCK**-B- 9P6Q9-18.0	M83513/04-E02*	MCK**-B- 31S6G1-36.0
M83513/03-F03*	MCK**-B- 37P6G9-18.0	M83513/03-B11*	MCK**-B- 15P6Q9-18.0	M83513/04-F02*	MCK**-B- 37S6G1-36.0
M83513/03-G03*	MCK**-B- 51P6G9-18.0	M83513/03-C11*	MCK**-B- 21P6Q9-18.0	M83513/04-G02*	MCK**-B- 51S6G1-36.0
M83513/03-H03*	MCK**-B-100P6G9-18.0	M83513/03-D11*	MCK**-B- 25P6Q9-18.0	M83513/04-H02*	MCK**-B-100S6G1-36.0
M83513/03-A04*	MCK**-B- 37P6G9-36.0	M83513/03-E11*	MCK**-B- 31P6Q9-18.0	M83513/04-A03*	MCK**-B- 9S6G9-18.0
M83513/03-B04*	MCK**-B- 15P6G9-36.0	M83513/03-F11*	MCK**-B- 37P6Q9-18.0	M83513/04-B03*	MCK**-B- 15S6G9-18.0
M83513/03-C04*	MCK**-B- 21P6G9-36.0	M83513/03-G11*	MCK**-B- 51P6Q9-18.0	M83513/04-C03*	MCK**-B- 21S6G9-18.0
M83513/03-D04*	MCK**-B- 25P6G9-36.0	M83513/03-H11*	MCK**-B-100P6Q9-18.0	M83513/04-D03*	MCK**-B- 25S6G9-18.0
M83513/03-E04*	MCK**-B- 31P6G9-36.0	M83513/03-A12*	MCK**-B- 9P6Q9-36.0	M83513/04-E03*	MCK**-B- 31S6G9-18.0
M83513/03-F04*	MCK**-B- 37P6G9-36.0	M83513/03-B12*	MCK**-B- 15P6Q9-36.0	M83513/04-F03*	MCK**-B- 37S6G9-18.0
M83513/03-G04*	MCK**-B- 51P6G9-36.0	M83513/03-C12*	MCK**-B- 21P6Q9-36.0	M83513/04-G03*	MCK**-B- 51S6G9-18.0
M83513/03-H04*	MCK**-B-100P6G9-36.0	M83513/03-D12*	MCK**-B- 25P6Q9-36.0	M83513/04-H03*	MCK**-B-100S6G9-18.0
M83513/03-A05*	MCK**-B- 9P5L4-0.5	M83513/03-E12*	MCK**-B- 31P6Q9-36.0	M83513/04-A04*	MCK**-B- 9S6G9-36.0
M83513/03-B05*	MCK**-B- 15P5L4-0.5	M83513/03-F12*	MCK**-B- 37P6Q9-36.0	M83513/04-B04*	MCK**-B- 15S6G9-36.0
M83513/03-C05*	MCK**-B- 21P5L4-0.5	M83513/03-G12*	MCK**-B- 51P6Q9-36.0	M83513/04-C04*	MCK**-B- 21S6G9-36.0
M83513/03-D05*	MCK**-B- 25P5L4-0.5	M83513/03-H12*	MCK**-B-100P6Q9-36.0	M83513/04-D04*	MCK**-B- 25S6G9-36.0
M83513/03-E05*	MCK**-B- 31P5L4-0.5	M83513/03-A13*	MCK**-B- 9P6G1-72.0	M83513/04-E04*	MCK**-B- 31S6G9-36.0
M83513/03-F05*	MCK**-B- 37P5L4-0.5	M83513/03-B13*	MCK**-B- 1 5P6G1-72.0	M83513/04-F04*	MCK**-B- 37S6G9-36.0
M83513/03-G05*	MCK**-B- 51P5L4-0.5	M83513/03-C13*	MCK**-B- 21P6G1-72.0	M83513/04-G04*	MCK**-B- 51S6G9-36.0
M83513/03-H05*	MCK**-B-100P5L4-0.5	M83513/03-D13*	MCK**-B- 25P6G1-72.0	M83513/04-H04*	MCK**-B-100S6G9-36.0
M83513/03-A06*	MCK**-B- 9P5L4-1.0	M83513/03-E13*	MCK**-B- 31P6G1-72.0	M83513/04-A05*	MCK**-B- 9S5L4-0.5
M83513/03-B06*	MCK**-B- 15P5L4-1.0	M83513/03-F13*	MCK**-B- 37P6G1-72.0	M83513/04-B05*	MCK**-B- 15S5L4-0.5
M83513/03-C06*	MCK**-B- 21P5L4-1.0	M83513/03-G13*	MCK**-B- 51P6G1-72.0	M83513/04-C05*	MCK**-B- 21S5L4-0.5
M83513/03-D06*	MCK**-B- 25P5L4-1.0	M83513/03-H13*	MCK**-B-100P6G1-72.0	M83513/04-D05*	MCK**-B- 25S5L4-0.5

MIL-PRF-83513 Cross Reference (Continued)

MCK (Metal Shell) (Continued)

Military Part No.	MICRODOT Part No.
M83513/04-E05*	MCK-**-B- 31S5L4-0.5
M83513/04-F05*	MCK-**-B- 37S5L4-0.5
M83513/04-G05*	MCK-**-B- 51S5L4-0.5
M83513/04-H05*	MCK-**-B-100S5L4-0.5
M83513/04-A06*	MCK-**-B- 9S5L4-1.0
M83513/04-B06*	MCK-**-B- 15S5L4-1.0
M83513/04-C06*	MCK-**-B- 21S5L4-1.0
M83513/04-D06*	MCK-**-B- 25S5L4-1.0
M83513/04-E06*	MCK-**-B- 31S5L4-1.0
M83513/04-F06*	MCK-**-B- 37S5L4-1.0
M83513/04-G06*	MCK-**-B- 51S5L4-1.0
M83513/04-H06*	MCK-**-B-100S5L4-1.0
M83513/04-A07*	MCK-**-B- 9S5L5-0.5
M83513/04-B07*	MCK-**-B- 15S5L5-0.5
M83513/04-C07*	MCK-**-B- 21S5L5-0.5
M83513/04-D07*	MCK-**-B- 25S5L5-0.5
M83513/04-E07*	MCK-**-B- 31S5L5-0.5
M83513/04-F07*	MCK-**-B- 37S5L5-0.5
M83513/04-G07*	MCK-**-B- 51S5L5-0.5
M83513/04-H07*	MCK-**-B-100S5L5-0.5
M83513/04-A08*	MCK-**-B- 9S5L5-1.0
M83513/04-B08*	MCK-**-B- 15S5L5-1.0
M83513/04-C08*	MCK-**-B- 21S5L5-1.0
M83513/04-D08*	MCK-**-B- 25S5L5-1.0
M83513/04-E08*	MCK-**-B- 31S5L5-1.0
M83513/04-F08*	MCK-**-B- 37S5L5-1.0
M83513/04-G08*	MCK-**-B- 51S5L5-1.0
M83513/04-H08*	MCK-**-B-100S5L5-1.0
M83513/04-A09*	MCK-**-B- 9S6Q1-18.0
M83513/04-B09*	MCK-**-B- 15S6Q1-18.0
M83513/04-C09*	MCK-**-B- 21S6Q1-18.0

Military Part No.	MICRODOT Part No.
M83513/04-D09*	MCK-**-B- 25S6Q1-18.0
M83513/04-E09*	MCK-**-B- 31S6Q1-18.0
M83513/04-F09*	MCK-**-B- 37S6Q1-18.0
M83513/04-G09*	MCK-**-B- 51S6Q1-18.0
M83513/04-H09*	MCK-**-B-100S6Q1-18.0
M83513/04-A10*	MCK-**-B- 9S6Q1-36.0
M83513/04-B10*	MCK-**-B- 15S6Q1-36.0
M83513/04-C10*	MCK-**-B- 21S6Q1-36.0
M83513/04-D10*	MCK-**-B- 25S6Q1-36.0
M83513/04-E10*	MCK-**-B- 31S6Q1-36.0
M83513/04-F10*	MCK-**-B- 37S6Q1-36.0
M83513/04-G10*	MCK-**-B- 51S6Q1-36.0
M83513/04-H10*	MCK-**-B-100S6Q1-36.0
M83513/04-A11*	MCK-**-B- 9S6Q9-18.0
M83513/04-B11*	MCK-**-B- 15S6Q9-18.0
M83513/04-C11*	MCK-**-B- 21S6Q9-18.0
M83513/04-D11*	MCK-**-B- 25S6Q9-18.0
M83513/04-E11*	MCK-**-B- 31S6Q9-18.0
M83513/04-F11*	MCK-**-B- 37S6Q9-18.0
M83513/04-G11*	MCK-**-B- 51S6Q9-18.0
M83513/04-H11*	MCK-**-B-100S6Q9-18.0
M83513/04-A12*	MCK-**-B- 9S6Q9-36.0
M83513/04-B12*	MCK-**-B- 15S6Q9-36.0
M83513/04-C12*	MCK-**-B- 21S6Q9-36.0
M83513/04-D12*	MCK-**-B- 25S6Q9-36.0
M83513/04-E12*	MCK-**-B- 31S6Q9-36.0
M83513/04-F12*	MCK-**-B- 37S6Q9-36.0
M83513/04-G12*	MCK-**-B- 51S6Q9-36.0
M83513/04-H12*	MCK-**-B-100S6Q9-36.0
M83513/04-A13*	MCK-**-B- 9S6G1-72.0
M83513/04-B13*	MCK-**-B- 15S6G1-72.0

Military Part No.	MICRODOT Part No.
M83513/04-C13*	MCK-**-B- 21S6G1-72.0
M83513/04-D13*	MCK-**-B- 25S6G1-72.0
M83513/04-E13*	MCK-**-B- 31S6G1-72.0
M83513/04-F13*	MCK-**-B- 37S6G1-72.0
M83513/04-G13*	MCK-**-B- 51S6G1-72.0
M83513/04-H13*	MCK-**-B-100S6G1-72.0
M83513/04-A14*	MCK-**-B- 9S6G9-72.0
M83513/04-B14*	MCK-**-B- 15S6G9-72.0
M83513/04-C14*	MCK-**-B- 21S6G9-72.0
M83513/04-D14*	MCK-**-B- 25S6G9-72.0
M83513/04-E14*	MCK-**-B- 31S6G9-72.0
M83513/04-F14*	MCK-**-B- 37S6G9-72.0
M83513/04-G14*	MCK-**-B- 51S6G9-72.0
M83513/04-H14*	MCK-**-B-100S6G9-72.0
M83513/04-A15*	MCK-**-B- 9S6Q1-72.0
M83513/04-B15*	MCK-**-B- 15S6Q1-72.0
M83513/04-C15*	MCK-**-B- 21S6Q1-72.0
M83513/04-D15*	MCK-**-B- 25S6Q1-72.0
M83513/04-E15*	MCK-**-B- 31S6Q1-72.0
M83513/04-F15*	MCK-**-B- 37S6Q1-72.0
M83513/04-G15*	MCK-**-B- 51S6Q1-72.0
M83513/04-H15*	MCK-**-B-100S6Q1-72.0
M83513/04-A16*	MCK-**-B- 9S6Q9-72.0
M83513/04-B16*	MCK-**-B- 15S6Q9-72.0
M83513/04-C16*	MCK-**-B- 21S6Q9-72.0
M83513/04-D16*	MCK-**-B- 25S6Q9-72.0
M83513/04-E16*	MCK-**-B- 31S6Q9-72.0
M83513/04-F16*	MCK-**-B- 37S6Q9-72.0
M83513/04-G16*	MCK-**-B- 51S6Q9-72.0
M83513/04-H16*	MCK-**-B-100S6Q9-72.0

*C = Cadmium or N = Nickel (space applications only)
 **C2 = Cadmium or N1 = Nickel (space applications only)

Hardware

Military Part No.	MICRODOT Part No.
M83513/05-02	"A. HD, J/S, L.F, #2"
M83513/05-12	"A. HD, J/S, L.F, #4"
M83513/05-03	"A. HD, J/S,H.F, #2"
M83513/05-13	"A. HD, J/S, H.F. #4"

Military Part No.	MICRODOT Part No.
M83513/05-05	"S. HD, J/S, L.F, #2"
M83513/05-15	"S. HD, J/S, L.F, #4"
M83513/05-06	"S. HD, J/S, H.F, #2"
M83513/05-16	"S. HD, J/S, H.F, #4"

Military Part No.	MICRODOT Part No.
M83513/05-07	"JACKPOST ASSY #2"
M83513/05-17	"JACKPOST ASSY, #4"

MCDR (Plastic Shell)

Military Part No.	MICRODOT Part No.
M83513/06-A	MCDR3-B- 9PS
M83513/06-B	MCDR3-B-15PS
M83513/06-C	MCDR3-B-21PS
M83513/06-D	MCDR3-B-25PS
M83513/06-E	MCDR3-B-31PS
M83513/06-F	MCDR3-B-37PS
M83513/06-G	MCDR3-B-51PS
M83513/07-A	MCDR3-B- 9SS
M83513/07-B	MCDR3-B-15SS
M83513/07-C	MCDR3-B-21SS
M83513/07-D	MCDR3-B-25SS
M83513/07-E	MCDR3-B-31SS
M83513/07-F	MCDR3-B-37SS

Military Part No.	MICRODOT Part No.
M83513/07-G	MCDR3-B-51SS
M83513/08-A01	MCDR3-B- 9P6G1-18.0
M83513/08-B01	MCDR3-B-15P6G1-18.0
M83513/08-C01	MCDR3-B-21P6G1-18.0
M83513/08-D01	MCDR3-B-25P6G1-18.0
M83513/08-E01	MCDR3-B-31P6G1-18.0
M83513/08-F01	MCDR3-B-37P6G1-18.0
M83513/08-G01	MCDR3-B-51P6G1-18.0
M83513/08-A02	MCDR3-B- 9P6G1-36.0
M83513/08-B02	MCDR3-B-15P6G1-36.0
M83513/08-C02	MCDR3-B-21P6G1-36.0
M83513/08-D02	MCDR3-B-25P6G1-36.0
M83513/08-E02	MCDR3-B-31P6G1-36.0

Military Part No.	MICRODOT Part No.
M83513/08-F02	MCDR3-B-37P6G1-36.0
M83513/08-G02	MCDR3-B-51P6G1-36.0
M83513/08-A03	MCDR3-B- 9P6G9-18.0
M83513/08-B03	MCDR3-B-15P6G9-18.0
M83513/08-C03	MCDR3-B-21P6G9-18.0
M83513/08-D03	MCDR3-B-25P6G9-18.0
M83513/08-E03	MCDR3-B-31P6G9-18.0
M83513/08-F03	MCDR3-B-37P6G9-18.0
M83513/08-G03	MCDR3-B-51P6G9-18.0
M83513/08-A04	MCDR3-B- 9P6G9-36.0
M83513/08-B04	MCDR3-B-15P6G9-36.0
M83513/08-C04	MCDR3-B-21P6G9-36.0
M83513/08-D04	MCDR3-B-25P6G9-36.0

3 Pin and Socket Connectors

MIL-PRF-83513 Cross Reference (Continued)

MCDR (Plastic Shell) (Continued)

Military Part No.	MICRODOT Part No.
M83513/08-E04	MCDR3-B-31P6G9-36.0
M83513/08-F04	MCDR3-B-37P6G9-36.0
M83513/08-G04	MCDR3-B-51P6G9-36.0
M83513/08-A05	MCDR3-B- 9P5L4-0.5
M83513/08-B05	MCDR3-B-15P5L4-0.5
M83513/08-C05	MCDR3-B-21P5L4-0.5
M83513/08-D05	MCDR3-B-25P5L4-0.5
M83513/08-E05	MCDR3-B-31P5L4-0.5
M83513/08-F05	MCDR3-B-37P5L4-0.5
M83513/08-G05	MCDR3-B-51P5L4-0.5
M83513/08-A06	MCDR3-B- 9P5L4-1.0
M83513/08-B06	MCDR3-B-15P5L4-1.0
M83513/08-C06	MCDR3-B-21P5L4-1.0
M83513/08-D06	MCDR3-B-25P5L4-1.0
M83513/08-E06	MCDR3-B-31P5L4-1.0
M83513/08-F06	MCDR3-B-37P5L4-1.0
M83513/08-G06	MCDR3-B-51P5L4-1.0
M83513/08-A07	MCDR3-B- 9P5L5-0.5
M83513/08-B07	MCDR3-B-15P5L5-0.5
M83513/08-C07	MCDR3-B-21P5L5-0.5
M83513/08-D07	MCDR3-B-25P5L5-0.5
M83513/08-E07	MCDR3-B-31P5L5-0.5
M83513/08-F07	MCDR3-B-37P5L5-0.5
M83513/08-G07	MCDR3-B-51P5L5-0.5
M83513/08-A08	MCDR3-B- 9P5L5-1.0
M83513/08-B08	MCDR3-B-15P5L5-1.0
M83513/08-C08	MCDR3-B-21P5L5-1.0
M83513/08-D08	MCDR3-B-25P5L5-1.0
M83513/08-E08	MCDR3-B-31P5L5-1.0
M83513/08-F08	MCDR3-B-37P5L5-1.0
M83513/08-G08	MCDR3-B-51P5L5-1.0
M83513/08-A09	MCDR3-B- 9P6Q1-18.0
M83513/08-B09	MCDR3-B-15P6Q1-18.0
M83513/08-C09	MCDR3-B-21P6Q1-18.0
M83513/08-D09	MCDR3-B-25P6Q1-18.0
M83513/08-E09	MCDR3-B-31P6Q1-18.0
M83513/08-F09	MCDR3-B-37P6Q1-18.0
M83513/08-G09	MCDR3-B-51P6Q1-18.0
M83513/08-A10	MCDR3-B- 9P6Q1-36.0
M83513/08-B10	MCDR3-B-15P6Q1-36.0
M83513/08-C10	MCDR3-B-21P6Q1-36.0
M83513/08-D10	MCDR3-B-25P6Q1-36.0
M83513/08-E10	MCDR3-B-31P6Q1-36.0
M83513/08-F10	MCDR3-B-37P6Q1-36.0
M83513/08-G10	MCDR3-B-51P6Q1-36.0
M83513/08-A11	MCDR3-B- 9P6Q9-18.0
M83513/08-B11	MCDR3-B-15P6Q9-18.0
M83513/08-C11	MCDR3-B-21P6Q9-18.0
M83513/08-D11	MCDR3-B-25P6Q9-18.0
M83513/08-E11	MCDR3-B-31P6Q9-18.0
M83513/08-F11	MCDR3-B-37P6Q9-18.0
M83513/08-G11	MCDR3-B-51P6Q9-18.0
M83513/08-A12	MCDR3-B- 9P6Q9-36.0
M83513/08-B12	MCDR3-B-15P6Q9-36.0
M83513/08-C12	MCDR3-B-21P6Q9-36.0
M83513/08-D12	MCDR3-B-25P6Q9-36.0
M83513/08-E12	MCDR3-B-31P6Q9-36.0
M83513/08-F12	MCDR3-B-37P6Q9-36.0
M83513/08-G12	MCDR3-B-51P6Q9-36.0
M83513/08-A13	MCDR3-B- 9P6G1-72.0

Military Part No.	MICRODOT Part No.
M83513/08-B13	MCDR3-B-15P6G1-72.0
M83513/08-C13	MCDR3-B-21P6G1-72.0
M83513/08-D13	MCDR3-B-25P6G1-72.0
M83513/08-E13	MCDR3-B-31P6G1-72.0
M83513/08-F13	MCDR3-B-37P6G1-72.0
M83513/08-G13	MCDR3-B-51P6G1-72.0
M83513/08-A14	MCDR3-B- 9P6G9-72.0
M83513/08-B14	MCDR3-B-15P6G9-72.0
M83513/08-C14	MCDR3-B-21P6G9-72.0
M83513/08-D14	MCDR3-B-25P6G9-72.0
M83513/08-E14	MCDR3-B-31P6G9-72.0
M83513/08-F14	MCDR3-B-37P6G9-72.0
M83513/08-G14	MCDR3-B-51P6G9-72.0
M83513/08-A15	MCDR3-B- 9P6Q1-72.0
M83513/08-B15	MCDR3-B-15P6Q1-72.0
M83513/08-C15	MCDR3-B-21P6Q1-72.0
M83513/08-D15	MCDR3-B-25P6Q1-72.0
M83513/08-E15	MCDR3-B-31P6Q1-72.0
M83513/08-F15	MCDR3-B-37P6Q1-72.0
M83513/08-G15	MCDR3-B-51P6Q1-72.0
M83513/08-A16	MCDR3-B- 9P6Q9-72.0
M83513/08-B16	MCDR3-B-15P6Q9-72.0
M83513/08-C16	MCDR3-B-21P6Q9-72.0
M83513/08-D16	MCDR3-B-25P6Q9-72.0
M83513/08-E16	MCDR3-B-31P6Q9-72.0
M83513/08-F16	MCDR3-B-37P6Q9-72.0
M83513/08-G16	MCDR3-B-51P6Q9-72.0
M83513/09-A01	MCDR3-B- 9S6G1-18.0
M83513/09-B01	MCDR3-B-15S6G1-18.0
M83513/09-C01	MCDR3-B-21S6G1-18.0
M83513/09-D01	MCDR3-B-25S6G1-18.0
M83513/09-E01	MCDR3-B-31S6G1-18.0
M83513/09-F01	MCDR3-B-37S6G1-18.0
M83513/09-G01	MCDR3-B-51S6G1-18.0
M83513/09-A02	MCDR3-B- 9S6G1-36.0
M83513/09-B02	MCDR3-B-15S6G1-36.0
M83513/09-C02	MCDR3-B-21S6G1-36.0
M83513/09-D02	MCDR3-B-25S6G1-36.0
M83513/09-E02	MCDR3-B-31S6G1-36.0
M83513/09-F02	MCDR3-B-37S6G1-36.0
M83513/09-G02	MCDR3-B-51S6G1-36.0
M83513/09-A03	MCDR3-B- 9S6G9-18.0
M83513/09-B03	MCDR3-B-15S6G9-18.0
M83513/09-C03	MCDR3-B-21S6G9-18.0
M83513/09-D03	MCDR3-B-25S6G9-18.0
M83513/09-E03	MCDR3-B-31S6G9-18.0
M83513/09-F03	MCDR3-B-37S6G9-18.0
M83513/09-G03	MCDR3-B-51S6G9-18.0
M83513/09-A04	MCDR3-B- 9S6G9-36.0
M83513/09-B04	MCDR3-B-15S6G9-36.0
M83513/09-C04	MCDR3-B-21S6G9-36.0
M83513/09-D04	MCDR3-B-25S6G9-36.0
M83513/09-E04	MCDR3-B-31S6G9-36.0
M83513/09-F04	MCDR3-B-37S6G9-36.0
M83513/09-G04	MCDR3-B-51S6G9-36.0
M83513/09-A05	MCDR3-B- 9S5L4-0.5
M83513/09-B05	MCDR3-B-15S5L4-0.5
M83513/09-C05	MCDR3-B-21S5L4-0.5
M83513/09-D05	MCDR3-B-25S5L4-0.5
M83513/09-E05	MCDR3-B-31S5L4-0.5

Military Part No.	MICRODOT Part No.
M83513/09-F05	MCDR3-B-37S5L4-0.5
M83513/09-G05	MCDR3-B-51S5L4-0.5
M83513/09-A06	MCDR3-B- 9S5L4-1.0
M83513/09-B06	MCDR3-B-15S5L4-1.0
M83513/09-C06	MCDR3-B-21S5L4-1.0
M83513/09-D06	MCDR3-B-25S5L4-1.0
M83513/09-E06	MCDR3-B-31S5L4-1.0
M83513/09-F06	MCDR3-B-37S5L4-1.0
M83513/09-G06	MCDR3-B-51S5L4-1.0
M83513/09-A07	MCDR3-B- 9S5L5-0.5
M83513/09-B07	MCDR3-B-15S5L5-0.5
M83513/09-C07	MCDR3-B-21S5L5-0.5
M83513/09-D07	MCDR3-B-25S5L5-0.5
M83513/09-E07	MCDR3-B-31S5L5-0.5
M83513/09-F07	MCDR3-B-37S5L5-0.5
M83513/09-G07	MCDR3-B-51S5L5-0.5
M83513/09-A08	MCDR3-B- 9S5L5-1.0
M83513/09-B08	MCDR3-B-15S5L5-1.0
M83513/09-C08	MCDR3-B-21S5L5-1.0
M83513/09-D08	MCDR3-B-25S5L5-1.0
M83513/09-E08	MCDR3-B-31S5L5-1.0
M83513/09-F08	MCDR3-B-37S5L5-1.0
M83513/09-G08	MCDR3-B-51S5L5-1.0
M83513/09-A09	MCDR3-B- 9S6Q1-18.0
M83513/09-B09	MCDR3-B-15S6Q1-18.0
M83513/09-C09	MCDR3-B-21S6Q1-18.0
M83513/09-D09	MCDR3-B-25S6Q1-18.0
M83513/09-E09	MCDR3-B-31S6Q1-18.0
M83513/09-F09	MCDR3-B-37S6Q1-18.0
M83513/09-G09	MCDR3-B-51S6Q1-18.0
M83513/09-A10	MCDR3-B- 9S6Q1-36.0
M83513/09-B10	MCDR3-B-15S6Q1-36.0
M83513/09-C10	MCDR3-B-21S6Q1-36.0
M83513/09-D10	MCDR3-B-25S6Q1-36.0
M83513/09-E10	MCDR3-B-31S6Q1-36.0
M83513/09-F10	MCDR3-B-37S6Q1-36.0
M83513/09-G10	MCDR3-B-51S6Q1-36.0
M83513/09-A11	MCDR3-B- 9S6Q9-18.0
M83513/09-B11	MCDR3-B-15S6Q9-18.0
M83513/09-C11	MCDR3-B-21S6Q9-18.0
M83513/09-D11	MCDR3-B-25S6Q9-18.0
M83513/09-E11	MCDR3-B-31S6Q9-18.0
M83513/09-F11	MCDR3-B-37S6Q9-18.0
M83513/09-G11	MCDR3-B-51S6Q9-18.0
M83513/09-A12	MCDR3-B- 9S6Q9-36.0
M83513/09-B12	MCDR3-B-15S6Q9-36.0
M83513/09-C12	MCDR3-B-21S6Q9-36.0
M83513/09-D12	MCDR3-B-25S6Q9-36.0
M83513/09-E12	MCDR3-B-31S6Q9-36.0
M83513/09-F12	MCDR3-B-37S6Q9-36.0
M83513/09-G12	MCDR3-B-51S6Q9-36.0
M83513/09-A13	MCDR3-B- 9S6G1-72.0
M83513/09-B13	MCDR3-B-15S6G1-72.0
M83513/09-C13	MCDR3-B-21S6G1-72.0
M83513/09-D13	MCDR3-B-25S6G1-72.0
M83513/09-E13	MCDR3-B-31S6G1-72.0
M83513/09-F13	MCDR3-B-37S6G1-72.0
M83513/09-G13	MCDR3-B-51S6G1-72.0
M83513/09-A14	MCDR3-B- 9S6G9-72.0
M83513/09-B14	MCDR3-B-15S6G9-72.0

MIL-PRF-83513 Cross Reference (Continued)

MCDR (Plastic Shell) (Continued)

Military Part No.	MICRODOT Part No.
M83513/09-C14	MCDR3-B-21S6G9-72.0
M83513/09-D14	MCDR3-B-25S6G9-72.0
M83513/09-E14	MCDR3-B-31S6G9-72.0
M83513/09-F14	MCDR3-B-37S6G9-72.0
M83513/09-G14	MCDR3-B-51S6G9-72.0
M83513/09-A15	MCDR3-B-9S6Q1-72.0
M83513/09-B15	MCDR3-B-15S6Q1-72.0

Military Part No.	MICRODOT Part No.
M83513/09-C15	MCDR3-B-21S6Q1-72.0
M83513/09-D15	MCDR3-B-25S6Q1-72.0
M83513/09-E15	MCDR3-B-31S6Q1-72.0
M83513/09-F15	MCDR3-B-37S6Q1-72.0
M83513/09-G15	MCDR3-B-51S6Q1-72.0
M83513/09-A16	MCDR3-B-9S6Q9-72.0
M83513/09-B16	MCDR3-B-15S6Q9-72.0

Military Part No.	MICRODOT Part No.
M83513/09-C16	MCDR3-B-21S6Q9-72.0
M83513/09-D16	MCDR3-B-25S6Q9-72.0
M83513/09-E16	MCDR3-B-31S6Q9-72.0
M83513/09-F16	MCDR3-B-37S6Q9-72.0
M83513/09-G16	MCDR3-B-51S6Q9-72.0

MCK (Metal Shell)

Military Part No.	MICRODOT Part No.
M83513/10-A01*N	MCK**-B- 9PRT1
M83513/10-B01*N	MCK**-B- 15PRT1
M83513/10-C01*N	MCK**-B- 21PRT1
M83513/10-D01*N	MCK**-B- 25PRT1
M83513/10-E01*N	MCK**-B- 31PRT1
M83513/10-F01*N	MCK**-B- 37PRT1
M83513/10-A01*P	MCK**-P- 9PRT1
M83513/10-B01*P	MCK**-P- 15PRT1
M83513/10-C01*P	MCK**-P- 21PRT1
M83513/10-D01*P	MCK**-P- 25PRT1
M83513/10-E01*P	MCK**-P- 31PRT1
M83513/10-F01*P	MCK**-P- 37PRT1
M83513/10-A02*N	MCK**-B- 9PRT1A
M83513/10-B02*N	MCK**-B- 15PRT1A
M83513/10-C02*N	MCK**-B- 21PRT1A
M83513/10-D02*N	MCK**-B- 25PRT1A
M83513/10-E02*N	MCK**-B- 31PRT1A
M83513/10-F02*N	MCK**-B- 37PRT1A
M83513/10-A02*P	MCK**-P- 9PRT1A
M83513/10-B02*P	MCK**-P- 15PRT1A
M83513/10-C02*P	MCK**-P- 21PRT1A
M83513/10-D02*P	MCK**-P- 25PRT1A
M83513/10-E02*P	MCK**-P- 31PRT1A
M83513/10-F02*P	MCK**-P- 37PRT1A
M83513/10-A03*N	MCK**-B- 9PRT1B
M83513/10-B03*N	MCK**-B- 15PRT1B
M83513/10-C03*N	MCK**-B- 21PRT1B
M83513/10-D03*N	MCK**-B- 25PRT1B
M83513/10-E03*N	MCK**-B- 31PRT1B
M83513/10-F03*N	MCK**-B- 37PRT1B
M83513/10-A03*P	MCK**-P- 9PRT1B
M83513/10-B03*P	MCK**-P- 15PRT1B
M83513/10-C03*P	MCK**-P- 21PRT1B
M83513/10-D03*P	MCK**-P- 25PRT1B
M83513/10-E03*P	MCK**-P- 31PRT1B
M83513/10-F03*P	MCK**-P- 37PRT1B
M83513/11-G01*N	MCK**-B- 51PRT1
M83513/11-G01*P	MCK**-P- 51PRT1
M83513/11-G02*N	MCK**-B- 51PRT1A
M83513/11-G02*P	MCK**-P- 51PRT1A
M83513/11-G03*N	MCK**-B- 51PRT1B
M83513/11-G03*P	MCK**-P- 51PRT1B
M83513/12-H01*N	MCK**-B-100PRT1
M83513/12-H01*P	MCK**-P-100PRT1
M83513/12-H02*N	MCK**-B-100PRT1A
M83513/12-H02*P	MCK**-P-100PRT1A
M83513/12-H03*N	MCK**-B-100PRT1B

Military Part No.	MICRODOT Part No.
M83513/12-H03*P	MCK**-P-100PRT1B
M83513/13-A01*N	MCK**-B- 9SRT1
M83513/13-B01*N	MCK**-B- 15SRT1
M83513/13-C01*N	MCK**-B- 21SRT1
M83513/13-D01*N	MCK**-B- 25SRT1
M83513/13-E01*N	MCK**-B- 31SRT1
M83513/13-F01*N	MCK**-B- 37SRT1
M83513/13-A01*P	MCK**-P- 9SRT1
M83513/13-B01*P	MCK**-P- 15SRT1
M83513/13-C01*P	MCK**-P- 21SRT1
M83513/13-D01*P	MCK**-P- 25SRT1
M83513/13-E01*P	MCK**-P- 31SRT1
M83513/13-F01*P	MCK**-P- 37SRT1
M83513/13-A02*N	MCK**-B- 9SRT1A
M83513/13-B02*N	MCK**-B- 15SRT1A
M83513/13-C02*N	MCK**-B- 21SRT1A
M83513/13-D02*N	MCK**-B- 25SRT1A
M83513/13-E02*N	MCK**-B- 31SRT1A
M83513/13-F02*N	MCK**-B- 37SRT1A
M83513/13-A02*P	MCK**-P- 9SRT1A
M83513/13-B02*P	MCK**-P- 15SRT1A
M83513/13-C02*P	MCK**-P- 21SRT1A
M83513/13-D02*P	MCK**-P- 25SRT1A
M83513/13-E02*P	MCK**-P- 31SRT1A
M83513/13-F02*P	MCK**-P- 37SRT1A
M83513/13-A03*N	MCK**-B- 9SRT1B
M83513/13-B03*N	MCK**-B- 15SRT1B
M83513/13-C03*N	MCK**-B- 21SRT1B
M83513/13-D03*N	MCK**-B- 25SRT1B
M83513/13-E03*N	MCK**-B- 31SRT1B
M83513/13-F03*N	MCK**-B- 37SRT1B
M83513/13-A03*P	MCK**-P- 9SRT1B
M83513/13-B03*P	MCK**-P- 15SRT1B
M83513/13-C03*P	MCK**-P- 21SRT1B
M83513/13-D03*P	MCK**-P- 25SRT1B
M83513/13-E03*P	MCK**-P- 31SRT1B
M83513/13-F03*P	MCK**-P- 37SRT1B
M83513/14-G01*N	MCK**-B- 51SRT1
M83513/14-G01*P	MCK**-P- 51SRT1
M83513/14-G02*N	MCK**-B- 51SRT1A
M83513/14-G02*P	MCK**-P- 51SRT1A
M83513/14-G03*N	MCK**-B- 51SRT1B
M83513/14-G03*P	MCK**-P- 51SRT1B
M83513/14-G03*P	MCK**-P- 51SRT1B
M83513/15-H01*N	MCK**-B-100SRT1
M83513/15-H01*P	MCK**-P-100SRT1
M83513/15-H02*N	MCK**-B-100SRT1A
M83513/15-H02*P	MCK**-P-100SRT1A

Military Part No.	MICRODOT Part No.
M83513/15-H03*N	MCK**-B-100SRT1B
M83513/15-H03*P	MCK**-P-100SRT1B
M83513/16-A01*N	MCK**-B- 9PRT3
M83513/16-B01*N	MCK**-B- 15PRT3
M83513/16-C01*N	MCK**-B- 21PRT3
M83513/16-D01*N	MCK**-B- 25PRT3
M83513/16-E01*N	MCK**-B- 31PRT3
M83513/16-F01*N	MCK**-B- 37PRT3
M83513/16-A01*P	MCK**-P- 9PRT3
M83513/16-B01*P	MCK**-P- 15PRT3
M83513/16-C01*P	MCK**-P- 21PRT3
M83513/16-D01*P	MCK**-P- 25PRT3
M83513/16-E01*P	MCK**-P- 31PRT3
M83513/16-F01*P	MCK**-P- 37PRT3
M83513/16-A02*N	MCK**-B- 9PRT3A
M83513/16-B02*N	MCK**-B- 15PRT3A
M83513/16-C02*N	MCK**-B- 21PRT3A
M83513/16-D02*N	MCK**-B- 25PRT3A
M83513/16-E02*N	MCK**-B- 31PRT3A
M83513/16-F02*N	MCK**-B- 37PRT3A
M83513/16-A02*P	MCK**-P- 9PRT3A
M83513/16-B02*P	MCK**-P- 15PRT3A
M83513/16-C02*P	MCK**-P- 21PRT3A
M83513/16-D02*P	MCK**-P- 25PRT3A
M83513/16-E02*P	MCK**-P- 31PRT3A
M83513/16-F02*P	MCK**-P- 37PRT3A
M83513/16-A03*N	MCK**-B- 9PRT3B
M83513/16-B03*N	MCK**-B- 15PRT3B
M83513/16-C03*N	MCK**-B- 21PRT3B
M83513/16-D03*N	MCK**-B- 25PRT3B
M83513/16-E03*N	MCK**-B- 31PRT3B
M83513/16-F03*N	MCK**-B- 37PRT3B
M83513/16-A03*P	MCK**-P- 9PRT3B
M83513/16-B03*P	MCK**-P- 15PRT3B
M83513/16-C03*P	MCK**-P- 21PRT3B
M83513/16-D03*P	MCK**-P- 25PRT3B
M83513/16-E03*P	MCK**-P- 31PRT3B
M83513/16-F03*P	MCK**-P- 37PRT3B
M83513/17-G01*N	MCK**-B- 51PRT3
M83513/17-G01*P	MCK**-P- 51PRT3
M83513/17-G02*N	MCK**-B- 51PRT3A
M83513/17-G02*P	MCK**-P- 51PRT3A
M83513/17-G03*N	MCK**-B- 51PRT3B
M83513/17-G03*P	MCK**-P- 51PRT3B
M83513/18-H01*N	MCK**-B-100PRT3
M83513/18-H01*P	MCK**-P-100PRT3
M83513/18-H02*N	MCK**-B-100PRT3A

3 Pin and Socket Connectors

MIL-PRF-83513 Cross Reference (Continued)

MCK (Metal Shell) (Continued)

Military Part No.	MICRODOT Part No.	Military Part No.	MICRODOT Part No.	Military Part No.	MICRODOT Part No.
M83515/18-H02*P	MCK**-P-100PRT3A	M83513/21-H03*N	MCK**-B-100SRT3B	M83513/24-H03*P	MCK**-P-100PST1B
M83513/18-H03*N	MCK**-B-100PRT3B	M83513/21-H03*P	MCK**-P-100SRT3B	M83513/25-A01*N	MCK**-B- 9SST1
M83513/18-H03*P	MCK**-P-100PRT3B	M83513/22-A01*N	MCK**-B- 9PST1	M83513/25-B01*N	MCK**-B- 15SST1
M83513/19-A01*N	MCK**-B- 9SRT3	M83513/22-B01*N	MCK**-B- 15PST1	M83513/25-C01*N	MCK**-B- 21SST1
M83513/19-B01*N	MCK**-B- 15SRT3	M83513/22-C01*N	MCK**-B- 21PST1	M83513/25-D01*N	MCK**-B- 25SST1
M83513/19-C01*N	MCK**-B- 21SRT3	M83513/22-D01*N	MCK**-B- 25PST1	M83513/25-E01*N	MCK**-B- 31SST1
M83513/19-D01*N	MCK**-B- 25SRT3	M83513/22-E01*N	MCK**-B- 31PST1	M83513/25-F01*N	MCK**-B- 37SST1
M83513/19-E01*N	MCK**-B- 31SRT3	M83513/22-F01*N	MCK**-B- 37PST1	M83513/25-A01*P	MCK**-P- 9SST1
M83513/19-F01*N	MCK**-B- 37SRT3	M83513/22-A01*P	MCK**-P- 9PST1	M83513/25-B01*P	MCK**-P- 15SST1
M83513/19-A01*P	MCK**-P- 9SRT3	M83513/22-B01*P	MCK**-P- 15PST1	M83513/25-C01*P	MCK**-P- 21SST1
M83513/19-B01*P	MCK**-P- 15SRT3	M83513/22-C01*P	MCK**-P- 21PST1	M83513/25-D01*P	MCK**-P- 25SST1
M83513/19-C01*P	MCK**-P- 21SRT3	M83513/22-D01*P	MCK**-P- 25PST1	M83513/25-E01*P	MCK**-P- 31SST1
M83513/19-D01*P	MCK**-P- 25SRT3	M83513/22-E01*P	MCK**-P- 31PST1	M83513/25-F01*P	MCK**-P- 37SST1
M83513/19-E01*P	MCK**-P- 31SRT3	M83513/22-F01*P	MCK**-P- 37PST1	M83513/25-A02*N	MCK**-B- 9SST1A
M83513/19-F01*P	MCK**-P- 37SRT3	M83513/22-A02*N	MCK**-B- 9PST1A	M83513/25-B02*N	MCK**-B- 15SST1A
M83513/19-A02*N	MCK**-B- 9SRT3A	M83513/22-B02*N	MCK**-B- 15PST1A	M83513/25-C02*N	MCK**-B- 21SST1A
M83513/19-B02*N	MCK**-B- 15SRT3A	M83513/22-C02*N	MCK**-B- 21PST1A	M83513/25-D02*N	MCK**-B- 25SST1A
M83513/19-C02*N	MCK**-B- 21SRT3A	M83513/22-D02*N	MCK**-B- 25PST1A	M83513/25-E02*N	MCK**-B- 31SST1A
M83513/19-D02*N	MCK**-B- 25SRT3A	M83513/22-E02*N	MCK**-B- 31PST1A	M83513/25-F02*N	MCK**-B- 37SST1A
M83513/19-E02*N	MCK**-B- 31SRT3A	M83513/22-F02*N	MCK**-B- 37PST1A	M83513/25-A02*P	MCK**-P- 9SST1A
M83513/19-F02*N	MCK**-B- 37SRT3A	M83513/22-A02*P	MCK**-P- 9PST1A	M83513/25-B02*P	MCK**-P- 15SST1A
M83513/19-A02*P	MCK**-P- 9SRT3A	M83513/22-B02*P	MCK**-P- 15PST1A	M83513/25-C02*P	MCK**-P- 21SST1A
M83513/19-B02*P	MCK**-P- 15SRT3A	M83513/22-C02*P	MCK**-P- 21PST1A	M83513/25-D02*P	MCK**-P- 25SST1A
M83513/19-C02*P	MCK**-P- 21SRT3A	M83513/22-D02*P	MCK**-P- 25PST1A	M83513/25-E02*P	MCK**-P- 31SST1A
M83513/19-D02*P	MCK**-P- 25SRT3A	M83513/22-E02*P	MCK**-P- 31PST1A	M83513/25-F02*P	MCK**-P- 37SST1A
M83513/19-E02*P	MCK**-P- 31SRT3A	M83513/22-F02*P	MCK**-P- 37PST1A	M83513/25-A03*N	MCK**-B- 9SST1B
M83513/19-F02*P	MCK**-P- 37SRT3A	M83513/22-A03*N	MCK**-B- 9PST1B	M83513/25-B03*N	MCK**-B- 15SST1B
M83513/19-A03*N	MCK**-B- 9SRT3B	M83513/22-B03*N	MCK**-B- 15PST1B	M83513/25-C03*N	MCK**-B- 21SST1B
M83513/19-B03*N	MCK**-B- 15SRT3B	M83513/22-C03*N	MCK**-B- 21PST1B	M83513/25-D03*N	MCK**-B- 25SST1B
M83513/19-C03*N	MCK**-B- 21SRT3B	M83513/22-D03*N	MCK**-B- 25PST1B	M83513/25-E03*N	MCK**-B- 31SST1B
M83513/19-D03*N	MCK**-B- 25SRT3B	M83513/22-E03*N	MCK**-B- 31PST1B	M83513/25-F03*N	MCK**-B- 37SST1B
M83513/19-E03*N	MCK**-B- 31SRT3B	M83513/22-F03*N	MCK**-B- 37PST1B	M83513/25-A03*P	MCK**-P- 9SST1B
M83513/19-F03*N	MCK**-B- 37SRT3B	M83513/22-A03*P	MCK**-P- 9PST1B	M83513/25-B03*P	MCK**-P- 15SST1B
M83513/19-A03*P	MCK**-P- 9SRT3B	M83513/22-B03*P	MCK**-P- 15PST1B	M83513/25-C03*P	MCK**-P- 21SST1B
M83513/19-B03*P	MCK**-P- 15SRT3B	M83513/22-C03*P	MCK**-P- 21PST1B	M83513/25-D03*P	MCK**-P- 25SST1B
M83513/19-C03*P	MCK**-P- 21SRT3B	M83513/22-D03*P	MCK**-P- 25PST1B	M83513/25-E03*P	MCK**-P- 31SST1B
M83513/19-D03*P	MCK**-P- 25SRT3B	M83513/22-E03*P	MCK**-P- 31PST1B	M83513/25-F03*P	MCK**-P- 37SST1B
M83513/19-E03*P	MCK**-P- 31SRT3B	M83513/22-F03*P	MCK**-P- 37PST1B	M83513/26-G01*N	MCK**-B- 51SST1
M83513/19-F03*P	MCK**-P- 37SRT3B	M83513/23-G01*N	MCK**-B- 51PST1	M83513/26-G01*P	MCK**-P- 51SST1
M83513/20-G01*N	MCK**-B- 51SRT3	M83513/23-G01*P	MCK**-P- 51PST1	M83513/26-G02*N	MCK**-B- 51SST1A
M83513/20-G01*P	MCK**-P- 51SRT3	M83513/23-G02*N	MCK**-B- 51PST1A	M83513/26-G02*P	MCK**-P- 51SST1A
M83513/20-G02*N	MCK**-B- 51SRT3A	M83513/23-G02*P	MCK**-P- 51PST1A	M83513/26-G03*N	MCK**-B- 51SST1B
M83513/20-G02*P	MCK**-P- 51SRT3A	M83513/23-G03*N	MCK**-B- 51PST1B	M83513/26-G03*P	MCK**-P- 51SST1B
M83513/20-G03*N	MCK**-B- 51SRT3B	M83513/23-G03*P	MCK**-P- 51PST1B	M83513/27-H01*N	MCK**-B-100SST1
M83513/20-G03*P	MCK**-P- 51SRT3B	M83513/24-H01*N	MCK**-B-100PST1	M83513/27-H01*P	MCK**-P-100SST1
M83513/21-H01*N	MCK**-B-100SRT3	M83513/24-H01*P	MCK**-P-100PST1	M83513/27-H02*N	MCK**-B-100SST1A
M83513/21-H01*P	MCK**-P-100SRT3	M83513/24-H02*N	MCK**-B-100PST1A	M83515/27-H02*P	MCK**-P-100SST1A
M83513/21-H02*N	MCK**-B-100SRT3A	M83515/24-H02*P	MCK**-P-100PST1A	M83513/27-H03*N	MCK**-B-100SST1B
M83515/21-H02*P	MCK**-P-100SRT3A	M83513/24-H03*N	MCK**-B-100PST1B	M83513/27-H03*P	MCK**-P-100SST1B

*C = Cadmium or N = Nickel (space applications only)

**C2 = Cadmium or N1 = Nickel (space applications only)