
Table of Contents

AGASTAT Electropneumatic Timing Relays

Series 7000 Industrial640-646
Series 2100 Miniature647-649

P&B W23/W31 Series

Toggle or Push/Pull Actuator Thermal Circuit Breaker650-652

P&B W6/W9 Series

Magnetic Hydraulic Circuit Breakers653-658

P&B KHS Series

Hermetically Sealed General Purpose Low Signal to 5A Multicontact AC
or DC Relay659-661

P&B KR-E Series

5 to 10 Amp Hermetically Sealed General Purpose Relay662, 663

P&B MDR Series

10 Amp Rotary Relay for Demanding Shock & Vibration Applications664, 665

CII High Performance Relays and Power Contactors

QPL and Commercial-Off-The-Shelf Models666




Series 7000 Industrial

Product Facts

- Available in On-Delay, True Off-Delay, and On/Off-Delay
- Timing from 0.1 seconds to 60 minutes, fully calibrated in linear increments
- Oversize time-calibrated adjustment knobs, serrated with high-resolution markings visible from all angles make this one of the most practical, easily-set timer available
- Inherent Transient Immunity
- Operating Voltages range from 6 to 550 VAC and 12 to 550 VDC with special voltages available
- Available in 2-pole or 4-pole models
- Many enclosure options: Explosion proof, Dust tight, Watertight, Hermetically-sealed, NEMA 1
- Auxiliary timed and instantaneous switches can be added for greater switching flexibility
- Numerous mounting options: Surface mount, Panel mount, Octal plug-in mounting
- Options and Accessories: Quick-connect terminals, Dial Stops, and Transient protection module
- Front Terminals — easy-to-reach screw terminals, all on the face of the unit, clearly identified
- Modular Assembly — timing head, coil assembly and switchblock are all individual modules, with switches field-replaceable
- Seismic & radiation tested E7000 models are available. Consult factory for details and special ordering information

■  File No. E15631

■  File No. LR29186



Construction

There are three main components of Series 7000 Timing Relays:

Calibrated Timing Head uses no needle valve, recirculates air under controlled pressure through a variable orifice to provide linearly adjustable timing. Patented design provides instant recycling, easy adjustment and long service life under severe operating conditions.

Precision-Wound Potted Coil module supplies the initial motive force with minimum current drain. Total sealing without external leads eliminates moisture problems, gives maximum insulation value.

Snap-Action Switch Assembly — custom-designed over-center mechanism provides greater contact pressure up to transfer time for positive, no flutter action. Standard switches are DPDT arrangement, with flexible beryllium copper blades and silver-

cadmium oxide contacts. Special “timing-duty” design for positive wiping action, sustained contact pressure and greater heat dissipation during long delay periods.

Each of these subassemblies forms a self-contained module which is then assembled at the factory with the other two to afford a wide choice of operating types, coil voltages, and timing ranges.

The squared design with front terminals and rear mounting permits the grouping of Series 7000 units side-by-side in minimum panel space. Auxiliary switches may be added in the base of the unit, without affecting the overall width or depth.

Operation

Two basic operating types are available. “On-Delay” models provide a delay period on energization, at the end of which the switch transfers the load from one set of contacts to another.

De-energizing the unit during the delay period immediately recycles the unit, readying it for another full delay period on re-energization.

In “Off-Delay” models the switch transfers the load immediately upon energization, and the delay period does not begin until the unit is de-energized. At the end of the delay period the switch returns to its original position. Re-energizing the unit during the delay period immediately resets the timing, readying it for another full delay period on de-energization. No power is required during the timing period.

In addition to these basic operating types, “Double-Head” models offer sequential delays on pull-in and drop-out in one unit, as described on page 642. With the addition of auxiliary switches the basic models provide two-step timing, pulse actuation for interlock circuits, or added circuit capacity.



Series 7000 Timing Relays are also manufactured to MIL-SPEC requirements, conforming to requirements of MIL-C-2212F (SHIPS) with the exception of MIL-S-901. Consult factory for ordering information.

Exception: 7032 models and certain models with accessories are not agency approved.

For complete product information, reference catalog 1308392.

Series 7000 Industrial (Continued)

On-Delay Model 7012

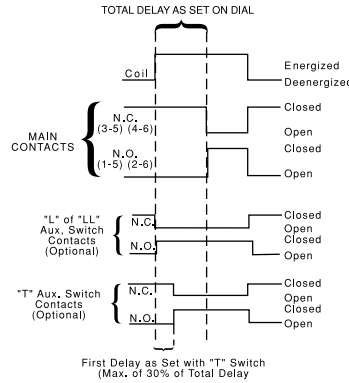



(Delay on pickup)

Applying continuous voltage to the coil (L1-L2) starts a time delay lasting for the preset time. During this period the normally closed contacts (3-5 and 4-6) remain closed. At the end of the delay period the normally closed contacts break and the normally open contacts (1-5 and 2-6) make. The contacts remain in this transferred position until the coil is deenergized, at

which time the switch instantaneously returns to its original position.

De-energizing the coil, either during or after the delay period, will recycle the unit within 50 msec. It will then provide a full delay period upon re-energization, regardless of how often the coil voltage is interrupted before the unit has been permitted to "time-out" to its full delay setting.

Off-Delay Model 7022

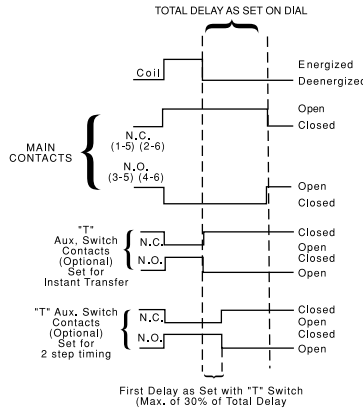

(Delay on drop-out)

Applying voltage to the coil (for at least 50 msec) will instantaneously transfer the switch, breaking the normally closed contacts (1-5 and 2-6), and making the normally open contacts (3-5 and 4-6). Contacts remain in this transferred position as long as the coil is energized. The time delay begins immediately upon de-energization. At the end

of the delay period the switch returns to its normal position.

Re-energizing the coil during the delay period will immediately return the timing mechanism to a point where it will provide a full delay period upon subsequent de-energization. The switch remains in the transferred position.

Auxiliary Switch Options

To increase the versatility of the basic timer models, auxiliary switches may be added to either on-delay or off-delay types. They switch additional circuits, provide two-step timing action, or furnish electrical interlock for sustained coil energization from a momentary impulse, depending on the type selected and its adjustment. Because of their simple attachment and adjustment features, they can be installed at the factory or in the field, by any competent mechanic. All auxiliary switches are SPDT with UL listings of 10A @ 125, 250, or 480 VAC. A maximum of one Code T or two Code L auxiliary switches may be added to each relay. The L or LL switch is available with on-delay relays only.

The T switch is available with both the on-delay and off-delay relays.

Auxiliary Switch Options for On-Delay Instant Transfer (Auxiliary Switch Code L, maximum of 2 per relay.)

1. Energizing coil begins time delay and transfers auxiliary switch.
2. Main switch transfers after total preset delay.
3. De-energizing coil resets both switches instantly.

Auxiliary switch is non-adjustable.

Two-Step Timing (Auxiliary Switch Code T, maximum of 1 per relay.)

1. Energizing coil begins time delay.
2. After first delay auxiliary switch transfers.

3. Main switch transfers after total preset delay.
4. De-energizing coil resets both switches instantly. First delay is independently adjustable, up to 30% of overall delay. (Recommended maximum 100 seconds.)

Auxiliary Switch Options for Off-Delay

In these models the same auxiliary switch provides either two-step timing or instant transfer action, depending on the adjustment of the actuator.

Two-Step Timing (Auxiliary Switch Code T, maximum of 1 per relay.)

1. Energizing coil transfers main and auxiliary switches instantly.
2. De-energizing coil begins time delay.

3. After first delay auxiliary switch transfers.
4. Main switch transfers after total preset delay. First delay is independently adjustable, up to 30% of overall delay. (Recommended maximum 100 seconds.)

Instant Transfer (Auxiliary Switch Code L, maximum of 1 per relay.)


1. Energizing coil transfers main and auxiliary switches instantly.
2. De-energizing coil resets auxiliary switch and begins time delay.
3. Main switch transfers after total preset delay. Auxiliary switch is factory adjusted to give instant transfer operation, but may be easily adjusted in the field to provide two-step timing.

For complete product information, reference catalog 1308392.



Series 7000 Industrial (Continued)

On-Delay, Off-Delay Model 7032

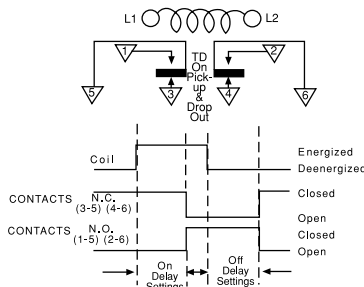

(Double Head)


The Double Head model provides delayed switch transfer on energization of its coil, followed by delayed resetting upon coil de-energization. Each delay period is independently adjustable.

In new circuit designs or the improvement of existing

controls now using two or more conventional timers, the Double Head unit offers distinct advantages.

Its compact design saves precious panel space, while the simplified wiring reduces costly interconnection.

Four Pole Model 7014, 7024

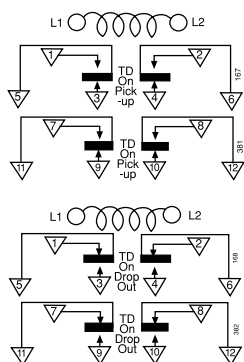

With the addition of an extra switch block at the bottom of the basic unit, this version of the Series 7000 offers four pole switch capacity with simultaneous timing or two-step timing. The two-step operation is achieved by factory adjustment to your specifications.

For two-step operation, a maximum timing ratio between upper and lower switches of 3:2 is recommended. Once adjusted at the factory, this ratio remains constant regardless of changes in dial settings.

(Ex: If upper switch transfer is set on dial at 60 sec., minimum time on lower switch should be 40 sec.)

This Series 7000 unit offers many of the performance features found in basic models — voltage ranges, timing and switch capacities are virtually identical.

Four pole models add approximately 1-1/4" to the maximum height of the basic model, approximately 1/8" to the depth. They are designed for vertical operation only.

Surge/Transient Protection Option



Transient Suppressor Option "V"

Product Facts

- Protect electronic control circuits from voltage transients generated by the timer coil
- Fast response to the rapidly rising back E.M.F.
- High performance clamping voltage characteristics
- U.L. recognized, (except varistor and coil together)
- Timer NOT polarity sensitive

The Surge/Transient Protection Option protects electronic control circuits from transients and surges which are generated when the timer coil is activated. Built with a minimum of moving parts, the unit provides a fast response to rapidly rising voltage transients. The accurate, precision-made device is not polarity sensitive and permits the user to initiate, delay, sequence and program equipment actions over a wide range of applications under the most severe operating conditions.

It consists of a specially modified coil case, varistor, varistor cover, terminal extensions and cup washers so that normal terminations can be used. The varistor will not affect the operating characteristics of the 7000 Timer. The varistor has bilateral and symmetrical voltage and current characteristics and therefore can be used in place of the back-to-back zener diodes. This characteristic also means that the coil will not be polarity sensitive.

For complete product information, reference catalog 1308392.

Series 7000 Industrial (Continued)

Specifications

All values shown are at normal operating voltage and 77°F (25°C) unless otherwise noted.

Operating Modes

Model 7012/7014 — On-Delay (Delay on pick-up)

Model 7022/7024 — Off-Delay (Delay on drop-out)

Model 7032 — On-Delay, Off-Delay (Double Head)

Timing Adjustment

Timing is set by simply turning the calibrated dial to the desired time value. In the zone of approximately 25° separating the high and low end of timing ranges A, D, E, and K, instantaneous operation (no time delay) will occur. All other ranges produce an infinite time delay when the dial is set in this zone.

Models 7014 and 7032 are available with letter-calibrated dials only. The upper end of the time ranges in these models may be twice the values shown.

Linear Timing Ranges

Time Range

| Code | Models 7012, 7022, 7024 | Models 7014, 7032 |
|------|-------------------------|-------------------|
| A | .1 to 1 Sec. | .2 to 2 Sec. |
| B | .5 to 5 Sec. | .7 to 7 Sec. |
| C | 1.5 to 15 Sec | 2 to 20 Sec. |
| D | 5 to 50 Sec. | 10 to 100 Sec. |
| E | 20 to 200 Sec. | 30 to 300 Sec. |
| F | 1 to 10 Min. | 1.5 to 15 Min. |
| H | 3 to 30 Min. | 3 to 30 Min. |
| I | 6 to 60 Min. | Not Avail. |
| J | 3 to 120 Cyc. | Not Avail. |
| K | 1 to 300 Sec. | Not Avail. |

Repeat Accuracy

| For delays of 200 seconds or less — | |
|-------------------------------------|------|
| 7012*, 7022, 7024 | ±5% |
| 7014* | ±10% |
| 7032 | ±15% |

For delays greater than 200 seconds —

| | |
|--------------------------|------|
| 7012*, 7022, 7014*, 7024 | ±10% |
| 7032 | ±15% |

*The first time delay afforded by Model 7012 with H (3 to 30 min.) and I (6 to 60 min.) time ranges or Model 7014 with H time range will be approximately 15% longer than subsequent delays due to coil temperature rise.

Reset Time — 50 msec. (except model 7032)

Relay Release Time — 50 msec. for on-delay models (7012/7014)

Relay Operate Time — 50 msec. for off-delay models (7022/7024)

Operating Voltage Coil Data (for DPDT)

| Coil Part Number | Code Letter | Rated Voltage | Operating* Voltage Range @ 60 Hz | Rated Voltage | Operating Voltage Range @ 50 Hz |
|------------------|-------------|---------------------------------|------------------------------------|---------------|---------------------------------|
| 7000 AC | A | 120 | 102-132 | 110 | 93.5-121 |
| | B | 240 | 204-264 | 220 | 187-242 |
| | C | 480 | 408-528 | | |
| | D | 550 | 468-605 | | |
| | E | 24 | 20.5-26.5 | | |
| | F | | | 127 | 108-140 |
| | G | | | 240 | 204-264 |
| | H | 12 | 10.2-13.2 | | |
| | I | 6 | 5.1-6.6 | | |
| | J | 208 | 178-229 | | |
| | K | | Dual Voltage Coil (Combines A & B) | | |
| 7010 DC | L | | Special AC Coils (L1, L2, etc.) | | |
| | M | 28 | 22.4-30.8 | | |
| | N | 48 | 38.4-52.8 | | |
| | O | 24 | 19.2-26.4 | | |
| | P | 125 | 100-137.5 | | |
| | Q | 12 | 9.6-13.2 | | |
| | R | 60 | 48-66 | | |
| | S | 250 | 200-275 | | |
| | T | 550 | 440-605 | | |
| | U | 16 | 12.8-17.6 | | |
| | V | 32 | 25.8-35.2 | | |
| W | 96 | 76.8-105.6 | | | |
| Y | 6 | 4.8-6.6 | | | |
| Z | 220 | 176-242 | | | |
| X | | Special DC Coils (X1, X2, etc.) | | | |

Minimum operating voltages are based on vertically mounted 7012 units. 7012 horizontally mounted or 7022 vertically or horizontally mounted units will operate satisfactorily at minimum voltages approximately 5% lower than those listed. AC units drop out at approximately 50% of rated voltage. DC units drop out at approximately 10% of rated voltage.

All units may be operated on intermittent duty cycles at voltages 10% above the listed maximums (intermittent duty — maximum 50% duty cycle and 30 minutes "on" time.)

*Four pole Models: Operational voltage range 90% to 110% for AC units; 85% to 110% for DC units.

Surge/Transient Protection Option

Characteristics (For D.C. Timers only)

| Coil Voltage Nominal (DC) | Max. Excess Energy Capacity (Joule) | Max De-energization Transient Voltage |
|---------------------------|-------------------------------------|---------------------------------------|
| 12 V | 0.4 J | 48 V |
| 24 V | 1.8 J | 93 V |
| 28 V | 1.8 J | 93 V |
| 32 V | 2.5 J | 135 V |
| 48 V | 3.57 J | 145 V |
| 60 V | 6 J | 250 V |
| 96 V | 10 J | 340 V |
| 110 V | 10 J | 340 V |
| 125 V | 10 J | 340 V |
| 220 V | 17 J | 366 V |
| 250 V | 17 J | 366 V |

Surge Life

Applied 100,000 times continuously with the interval of 10 seconds at room temperature. Below 68 VAC — 12A; Above 68 VAC — 35A.

Temperature Range

Operating — -22°F to +167°F (-30°C to +75°C)

Storage — -40°F to +167°F (-40°C to +75°C)

Output/Life Contact Ratings

Contact Capacity in Amperes (Resistive Load)

| Contact Voltage | Min. 100,000 Operations | Min. 1,000,000 Operations |
|-----------------|-------------------------|---------------------------|
| 30 VDC | 15.0 | 7.0 |
| 110 VDC | 1.0 | 0.5 |
| 120 V 60 Hz | 20.0 | 15.0 |
| 240 V 60 Hz | 20.0 | 15.0 |
| 480 V 60 Hz | 12.0 | 10.0 |

10 Amps resistive, 240 VAC.

1/4 Horsepower, 120 VAC/240 VAC per pole.

15 Amps 30 VDC per pole.

5 Amps, general purpose, 600 VAC per pole.

Dielectric — Withstands 1500 volts RMS 60 Hz between terminals and ground. Withstands 1,000 volts RMS 60 Hz between non-connected terminals. For dielectric specification on hermetically sealed models consult factory.

Insulation Resistance —

500 Megohms with 500 VDC applied.

Temperature Range —

Operating — -20°F to +165°F (-29°C to 74°C)

Storage —

-67°F to +165°F (-55°C to 74°C)

Temperature Variation — Using a fixed time delay which was set and measured when the ambient temperature was 77°F (25°C), the maximum observed shift in the average of three consecutive time delays was -20% at -20°F (-29°C) and +20% at 165°F (74°C).

Mounting/Terminals — Normal mounting of the basic unit is in a vertical position, from the back of the panel. A front mounting bracket is also supplied with each basic unit, for installation from the front of the panel. **All units are calibrated for vertical operation.** Basic models (7012, 7022) may also be horizontally mounted, and will be adjusted accordingly **when Accessory Y1 is specified in your order.**

Standard screw terminals (8-32 truss head screws supplied) are located on the front of the unit, with permanent schematic markings. Barrier isolation is designed to accommodate spade or ring tongue terminals, with spacing to meet all industrial control specifications.

The basic Series 7000 may also be panel mounted with the addition of a panel mount kit that includes all necessary hardware and faceplate. This offers the convenience of "out-front" adjustment, with large calibrated dial skirt knob. The faceplate and knob blend with advanced equipment and console designs, while the body of the unit and its wiring are protected behind the panel.



Relays

For complete product information, reference catalog 1308392.

Series 7000 Industrial (Continued)

Specifications (Continued)

Other mounting options include plug-in styles and special configurations to meet unusual installation requirements. Contact factory for details.


Power Consumption — Approximately 8 watts power at rated voltage.

Approximate Weights —


Models 7012, 7022 2 lbs. 4 oz.
7014, 7024 2 lbs. 10 oz.
7032 3 lbs. 5 oz.

Weight may vary slightly with coil voltage.


Basic Models 7012, 7022

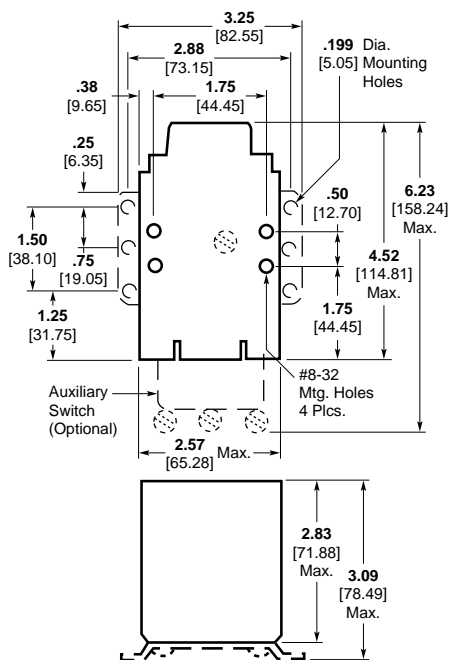


Models 7014, 7024

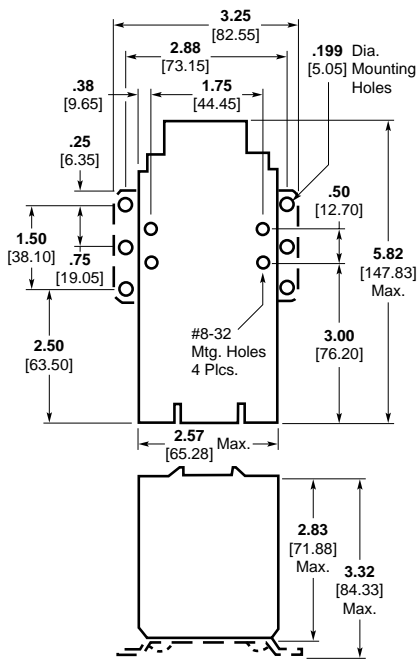


Model 7032

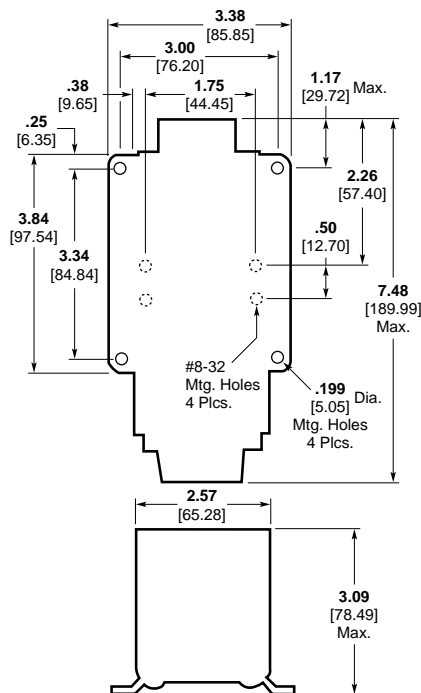

Panel Mount Option "X"

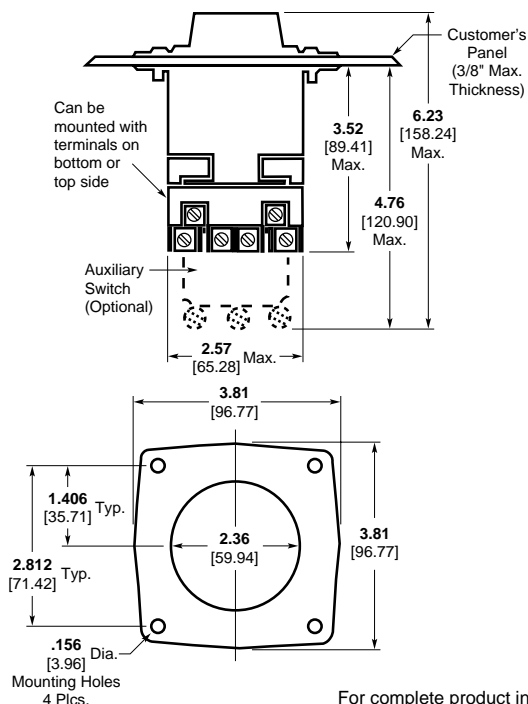


Surge/Transient Protection Option

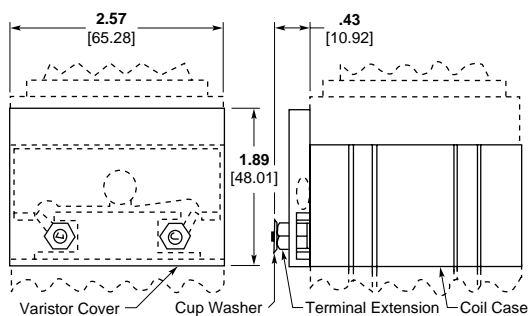

For complete product information, reference catalog 1308392.

Series 7000 Industrial (Continued)

Ordering Information Catalog Numbering Code

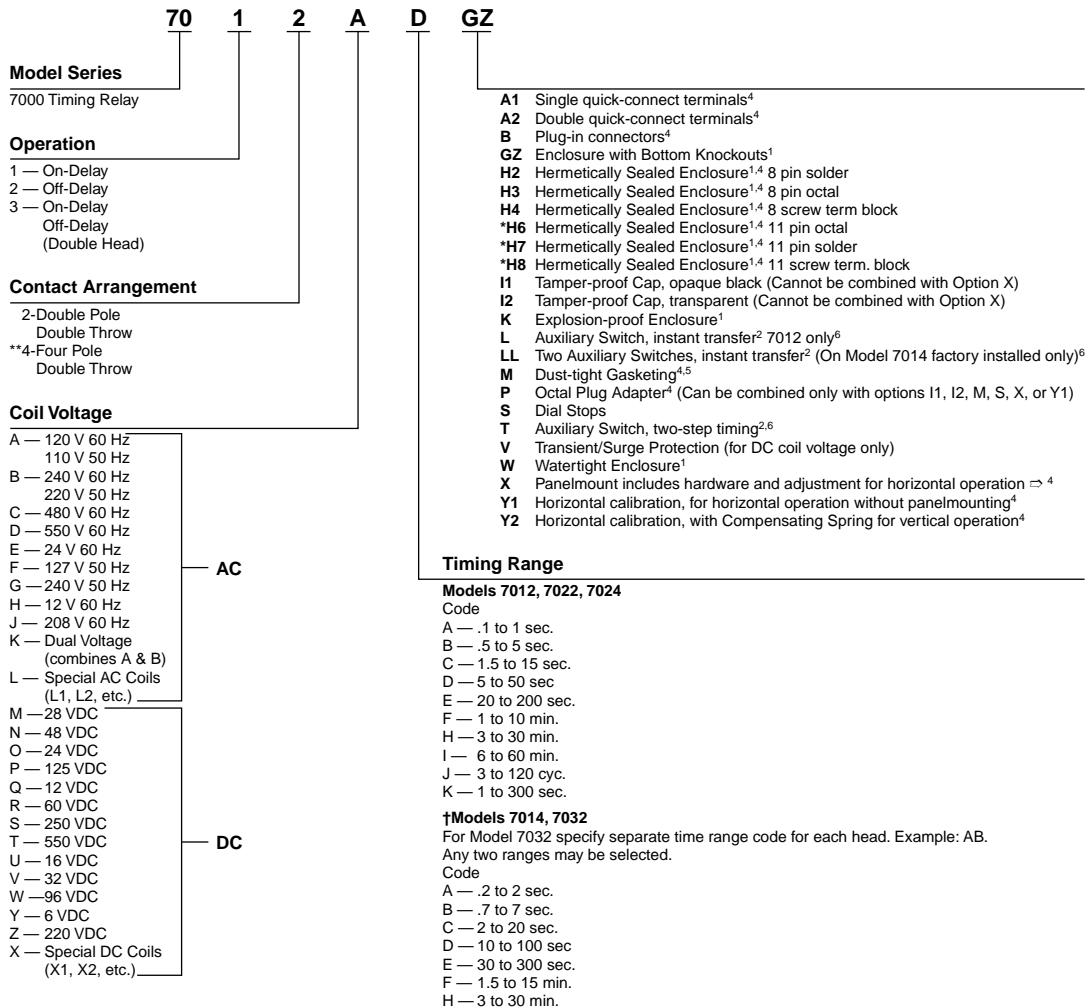

Notes:

- ¹ Cannot be combined with B, P or X Options.
- ² Cannot be combined with B, P or Y2 Options.
- ³ Cannot be combined with GZ, H, I1, I2, K, W or Y1 Options.
- ⁴ Not available on 4-Pole Models.
- ⁵ Not available with L, T or LL options
- ⁶ Not available on hermetically sealed units.
- ^{*} Sized to accommodate one L or T Auxiliary Switch.
- ^{††} Not available on On-Delay, Off-Delay (Double Head) model.
- [†] Available with letter calibrated dials only. Upper end of time range may be twice the value shown.
- ^{††} 120 cycles = 2 sec.




For complete product information, reference catalog 1308392.


Series 7000 Industrial (Continued)

Ordering Options

A1 — Single Quick-Connect Terminals

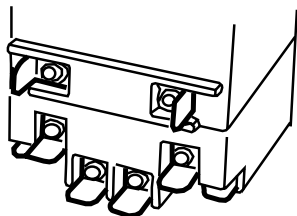


A2 — Double Quick-Connect Terminals

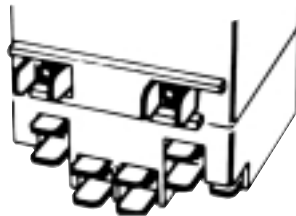


B — Plug-In Connectors

Use with Accessory "C" or "D" below.

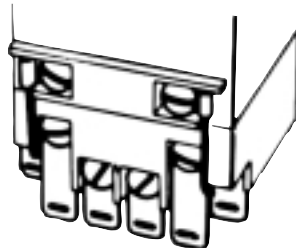

GZ — Total Enclosure


With knockouts for bottom connection.
3.16 [80.26] W x 3.84 [97.54] D x
7.63 [193.80] H



H — Hermetically Sealed Enclosure



I — Tamper Proof Cover

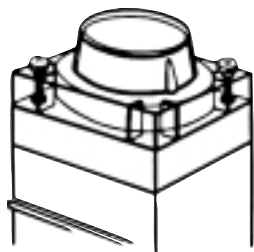


K — Explosion proof Enclosure


(Meets requirements for Class I,
Groups C & D locations).
7.50 [190.5] W x
6.00 [152.4] D x
10.38 [263.6] H




L — Auxiliary Switch




LL — Auxiliary Switch




M — Dust-tight




P — Octal Plug Adapter




S — Dial Stops




T — Auxiliary Switch



V — Transient/Surge Protection

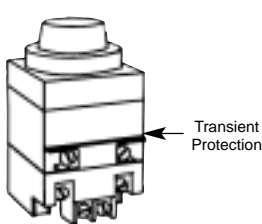


W — Watertight Enclosure (NEMA-4)

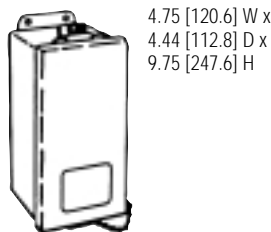

4.75 [120.6] W x
4.44 [112.8] D x
9.75 [247.6] H

X — Panelmount Kit

Mounting hardware included.




Accessories

(Not available for 7032 models)

Ordering options can only be ordered as factory installed options.

Plug-In Receptacle (Accessory C)



Screw
Terminals
Catalog No.
700137. For
use with "B"
Option.

Plug-In Receptacle (Accessory D)

Quick Connect Terminals Catalog No.
700141. For use with "B" Option.



For complete product information, reference catalog 1308392.

Series 2100 Miniature

Product Facts

- High Repeat Accuracy over voltage and temperature extremes
- Hermetically sealed units are designed for high shock and vibration applications
- Instant recycling — easy linear adjustment
- Exclusive Dial Head adjustment — no needle valves
- Delay ranges from milliseconds to 3 minutes
- DPDT contacts
- Inherent transient immunity
- True Off-Delay timing



Design & Construction

Sealed patented timing head circulates air under controlled pressure through a variable orifice to provide adjustable timing. Circular-path Dial Head principle replaces traditional needle valve.

Snap-action switch assembly provides sustained contact pressure during timing cycles. Specially designed over center mechanism assures flutter-free load transfer after extended delay periods.


Precision-wound solenoid assembly supplies the basic motive force when the control circuit is closed. These assemblies are mounted in a rigid self-supporting



framework within a steel enclosure. This rugged construction promotes alignment of all operating members, the key to this unit's long trouble-free operation.

Operation




Series 2112 (On-Delay) — Applying rated voltage to the solenoid coil starts the preset time delay. At the end of the delay period the NC contacts break and the NO contacts make. Contacts remain in this position until the coil is de-energized, when the switch instantaneously returns to its original position. De-energizing the coil, either during or after the delay period, will immediately (within 25 msec.) recycle



the unit. It will then provide another full delay period on re-energization.

Series 2122 (Off-Delay) — Applying a rated voltage to the coil for at least 75 msec. (for accurate timing) will instantaneously transfer the switch, breaking the NC contacts and making the NO contacts. Contacts remain in this position as long as the coil is energized. The preset time delay period begins as soon as the coil is de-energized, at the end of which the switch returns to its original position.

No power is required during the timing period. Re-energizing the coil, either during or after the delay period, will immediately start a new cycle with full delay period.

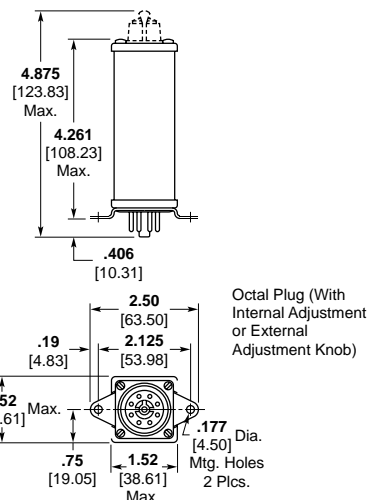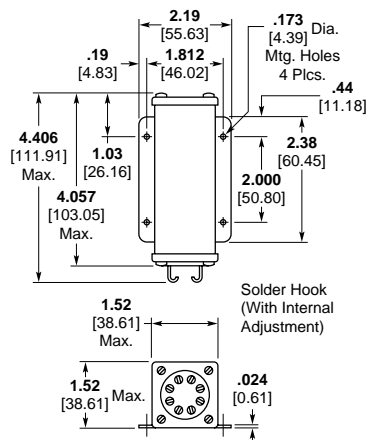

For complete product information, reference catalog 1308392.

Series 2100 Miniature (Continued)

Specifications



—4



—5



—9

All values listed are at nominal operating voltage and 77°F (25°C) unless noted.

Operating Mode —

Series 2112 — On-Delay (Delay on Pull-in);

Series 2122 — Off-Delay (Delay on Drop-out)

Timing Adjustment — All standard models offer easy linear adjustment over one of nine timing ranges listed below. For applications requiring frequent readjustment, the external knob model with calibrated dial is recommended. For tamper-proof installation or where readjustment is infrequent, the internal key model may be preferred. This model requires removal of the cover plate for timing adjustment. Hermetically sealed models provide a slotted adjusting screw under the cap nut on the top cover.

Timing Ranges —

| Code | Seconds |
|------|-------------------|
| A | .03 to .1 |
| B | .1 to .3 |
| C | .15 to 1.0 |
| D | .375 to 3.0 |
| E | .750 to 10.0 |
| F | 1.0 to 30.0 |
| G | 2.0 to 60.0 |
| H | 5.0 to 120.0 |
| J | 5.0 to 180.0 |
| K | 1.5 to 30.0 Cyc. |
| L | 3.0 to 120.0 Cyc. |

Repeat Accuracy —

NORMAL VERTICAL POSITION

+5% at 77°F (25°C)

+7% at 185°F (85°C)

+8% at -67°F (-55°C)

The average time between -67°F (-55°C)

and 185°F (85°C) will be within ± 20% of the average @ 77°F (25°C) with a proportionally reduced effect at lesser extremes.

In extremely short delay settings an additional 8 msec. variation may result on AC models due to "half cycle" alternating current effect.

SETTING TOLERANCE: Factory time setting, when specified, subject to additional +5% tolerance.

Position Sensitivity —

HORIZONTAL POSITION —

Approximately 5% increase from the initial time in the vertical position.

INVERTED POSITION — Approximately 10% increase from the initial time in the vertical position.

Reset Time —

2112 Series — 25 msec.;

2122 Series — 75 msec.

Relay Release Time —

25 msec. (2112 Series)

Relay Operate Time —

75 msec. (2122 Series)

Operating Voltage — Coil Data

| Code | Nominal Operating Voltage | Resistance Ohms ±10% |
|------|---------------------------|----------------------|
| M | 12 VDC | 30 |
| N | 28 VDC | 131 |
| P | 48 VDC | 500 |
| R | 110 VDC | 3200 |
| S | 120 V 60 Hz (2112 Series) | 190 |
| S | 120 V 60Hz (2122 Series) | 285 |
| T | 240 V 60Hz | 765 |
| U | 115 V 400Hz | 2600 |
| Y | 125 VDC | 3380 |

Transients — Insensitive to transients of ± 1500 VAC for 10 milliseconds.

Dielectric — 1000V RMS @ 60Hz between non-connected terminals.

Contact Rating (DPDT Contacts) —

Inductive — 2 Amps @ 30 VDC, .75 Amps @ 110 VDC, 3 Amps @ 120 V 60 Hz, 2 Amps @ 120 V 400 Hz, 1.5 Amps @ 240 V 60 Hz.

Resistive — 10 Amps @ 30 VDC, 1 Amp @ 110 VDC, 10 Amps @ 120 V 60 Hz, 10 Amps @ 120 V 400 Hz, 5 Amps @ 240 V 60 Hz.

Based on 100,000 operations electrical, 1,000,000 mechanical. Inductive and capacitive load should not have inrush currents that exceed five times normal operating load.

Ambient Temperature Range —

-55°F to 85°F (-67°C to 185°C)


Weight — Maximum, any unit - 17 ozs.

Mounting/Terminals —

Chassis mounting tabs, octal plugs and external (-4) or internal (-5) adjustment. Panel mounting back plate, internal adjustment, and solder hook terminals (-9).

These are minimum standards; where more severe environmental conditions must be met, please consult the factory.

Ordering Information — Industrial Models

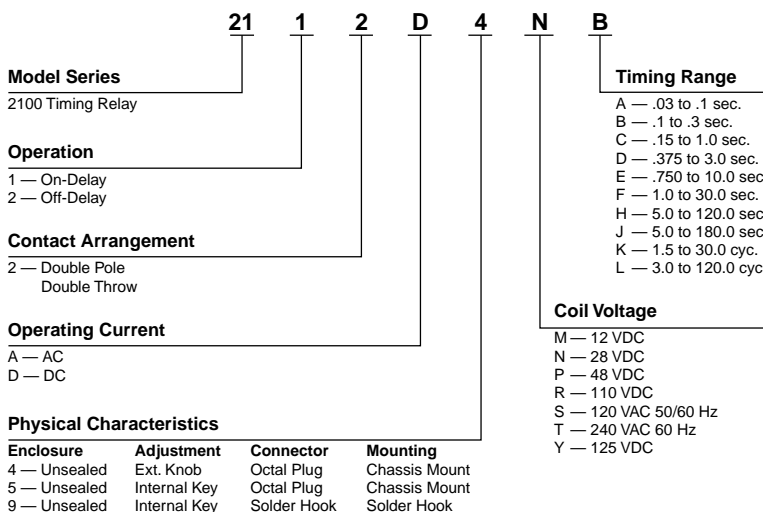

For complete product information, reference catalog 1308392.

Series 2100 MIL-Spec and Hermetically Sealed

Specifications








Dielectric — In accordance with specification MIL-R-6106E (ASG). Also withstands 1,000 Volts RMS at 60 Hz between non-connected terminals.


Other — AGASTAT Miniature Timing Relays also conform to applicable MIL-Spec. requirements covering: Moisture, Ozone, Humidity, Sunshine, Sand/Dust, Acoustic Noise, Salt Spray, and Prolonged Storage.



AGASTAT timing relays perform to military specifications in patriot missiles.

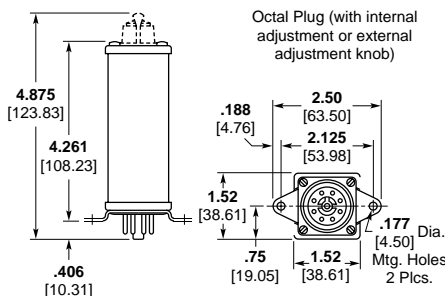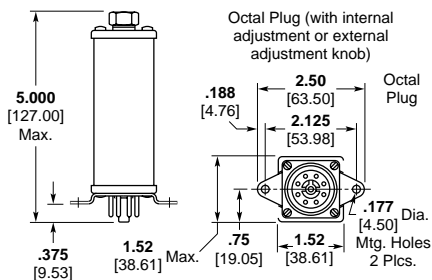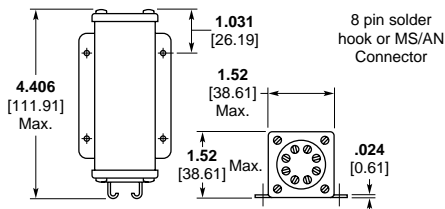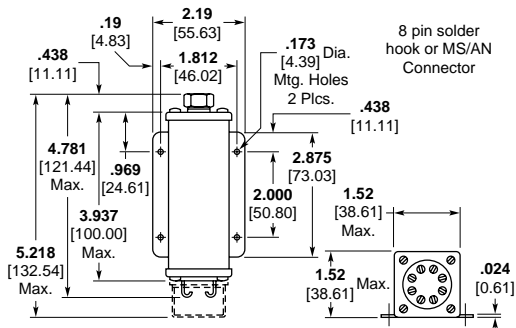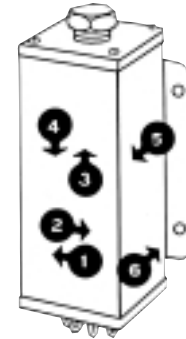

Ordering Information — MIL-Spec & Hermetically Sealed

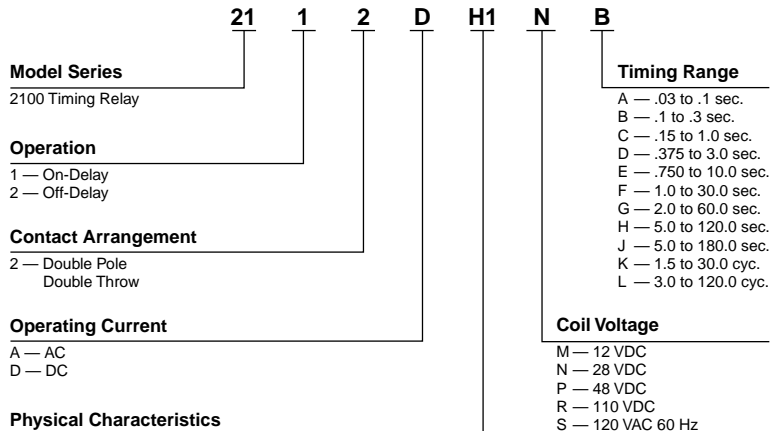

Physical Characteristics

| Enclosure | Adjustment | Connector | Mounting |
|-----------------|--------------|-------------|---------------|
| MIL-Spec. | | | |
| H1 Hermet. Seal | Ext. Screw | Solder Hook | Panel Mount |
| H2 Hermet. Seal | Ext. Screw | Octal Plug | Chassis Mount |
| H3 Hermet. Seal | Ext. Screw | "AN" Conn. | Panel Mount |
| 4 — Unsealed | Ext. Knob | Octal Plug | Chassis Mount |
| 5 — Unsealed | Internal Key | Octal Plug | Chassis Mount |
| 9 — Unsealed | Internal Key | Solder Hook | Solder Hook |

For complete product information, reference catalog 1308392.



Toggle or Push/Pull Actuator Thermal Circuit Breaker

Product Facts

- 0.5 amp to 50 amp ratings may be used as on/off switch
- Cannot be reset against overload
- W23 has visible trip indicator
- Screw termination
- Trip-free operation
- W23 and W31 are UL 1077 Recognized as Supplementary Protectors, File E69543, and CSA Certified as Appliance Component Protectors, File LR15734



W23



W31

Specifications

Electrical Data @ +25°C

Calibration — Will continuously carry 100% of rating, may trip between 101% and 134% of rating at 25°C. Must trip at 135% in one hour.

Maximum Operating Voltages — 50 VDC or 250 VAC (to 400 Hz).

Interrupting Capacity — 0.5-25 amp models — 2,500 amps at 50 VDC, 1000 amps at 250 VAC. 26-50amp models — 1000 amps at 50 VDC or 250 VAC.

Resettable Overload Capacity — Ten times rated current.

Dielectric Strength — Over 1,500 volts RMS.

| Current Rating in Amps | Maximum Resistance in Ohms ± 30% |
|------------------------|----------------------------------|
| 1 | .61 |
| 5 | .03 |
| 10 | .01 |
| 15 | .006 |
| 20 | .004 |
| 30 | .003 |
| 40 | .002 |
| 50 | .002 |

Mechanical/Environmental Data

Endurance Cycling — More than 6,000 cycles at 100% of rating, or 10,000 mechanical cycles.

Humidity — Will meet requirements of MIL-STD-202, Method 106.

Salt Spray — Will meet requirements of MIL-STD-202, Method 101, Test Condition B.


Termination — Two #8-32 screw terminals.

Mounting — W23 — Threaded bushing, 3/8" [9.53 mm] diameter.


W31 — Threaded bushing, 15/32" [11.91 mm] diameter, with or without anti-rotation flats.

Weight — Less than 2 oz. (57g).

Time Vs. Current Trip Curve @ +25°C

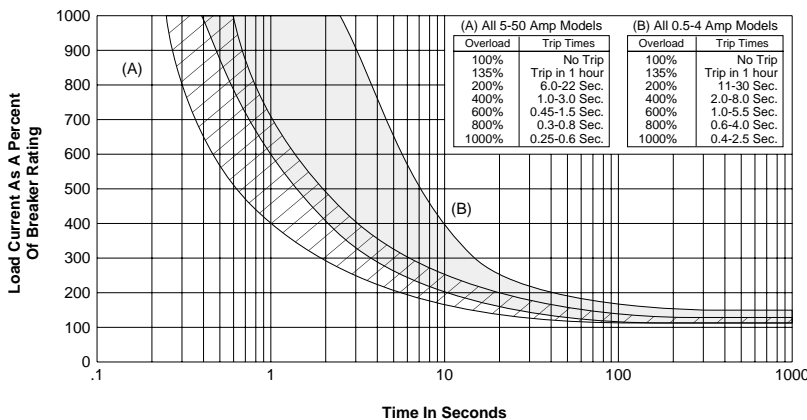

Ambient Compensation Chart

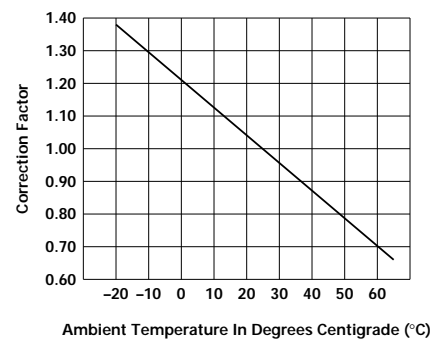

To use this chart: Read up from the ambient temperature to the curve, and across to find a correction factor. Multiply the breaker rating by the correction factor to determine the compensated rating. Calculate the overloads in terms of the compensated rating to use the published trip curve.

For complete product information, reference catalog 1308242.

Toggle or Push/Pull Actuator Thermal Circuit Breaker (Continued)

Ordering Information

Typical Part Number: **W 23 — X 1 A 1 G — 5**

Designator
W = Circuit breaker

Series Number
23 = Single pole, push/pull

Circuit Function
X = Series trip

Button
1 = Black with white amp rate marking and white trip band

Mounting Bushing
A = 3/8" - 24 threaded bushing .375" [9.53 mm] long, silver color

| Amp Rating | | | | |
|------------|---|-----|----|----|
| 0.5 | 3 | 7.5 | 20 | 35 |
| 1 | 4 | 10 | 25 | 40 |
| 2 | 5 | 15 | 30 | 50 |

Mounting Hardware
A = Knurled nut/hex nut installed
G = Two hex nuts/lockwasher installed
Z = No mounting hardware supplied

Terminals (See drawings for relative terminal positions):
1 = Screw terminals situated 90° to each other with #8-32 screws and washers installed
3 = Screw terminals situated parallel to each other pointing upward with #8-32 screws and washers installed

Stock Items - The following items are normally maintained in stock for immediate delivery.

| | | | |
|-------------|----------------|--------------|--------------|
| W23-X1A1G-1 | W23-X1A1G-7.50 | W23-X1A1G-25 | W23-X1A1G-50 |
| W23-X1A1G-2 | W23-X1A1G-10 | W23-X1A1G-30 | |
| W23-X1A1G-3 | W23-X1A1G-15 | W23-X1A1G-35 | |
| W23-X1A1G-5 | W23-X1A1G-20 | W23-X1A1G-40 | |

Ordering Information

Typical Part Number: **W 31 — X 2 M 1 G — 5**

Designator
W = Circuit breaker

Series Number
31 = Single pole, toggle actuator

Circuit Function
X = Series trip

Mounting Bushing
1 = 15/32" - 32 threaded bushing .320" [8.13 mm] long, round, silver color
2 = 15/32" - 32 threaded bushing .320" [8.13 mm] long, double "D," silver color

Toggle
M = Silver color metal toggle, round, with amp rate marking on end

| Amp Rating | | | | |
|------------|---|-----|----|----|
| 0.5 | 3 | 7.5 | 20 | 35 |
| 1 | 4 | 10 | 25 | 40 |
| 2 | 5 | 15 | 30 | 50 |

Mounting Hardware
A = Knurled nut/hex nut installed
G = Two hex nuts/lockwasher installed
Z = No mounting hardware supplied

Terminals (See drawing for relative terminal positions):
1 = Screw terminals situated 90° to each other with #8-32 screws and washers installed
5 = Screw terminals situated parallel to each other pointing downward with #8-32 screws and washers installed

Stock Items - The following items are normally maintained in stock for immediate delivery.

| | | |
|----------------|--------------|--------------|
| W31-X2M1G-1 | W31-X2M1G-10 | W31-X2M1G-35 |
| W31-X2M1G-2 | W31-X2M1G-15 | W31-X2M1G-40 |
| W31-X2M1G-3 | W31-X2M1G-20 | W31-X2M1G-50 |
| W31-X2M1G-5 | W31-X2M1G-25 | |
| W31-X2M1G-7.50 | W31-X2M1G-30 | |




For complete product information, reference catalog 1308242.


Toggle or Push/Pull Actuator Thermal Circuit Breaker (Continued)

W23 Outline Dimensions


Terminal Style 1

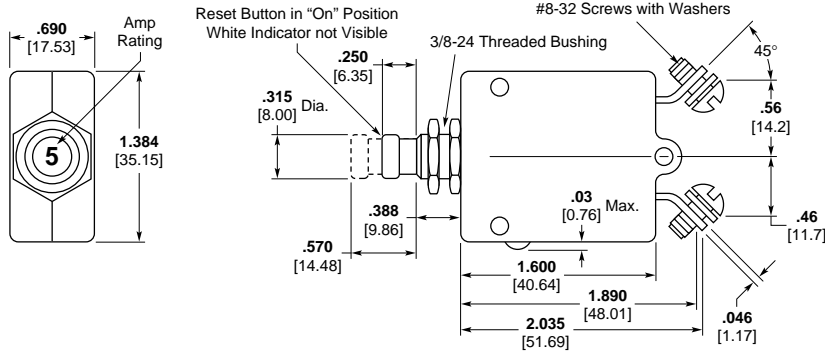

Terminal Style 3

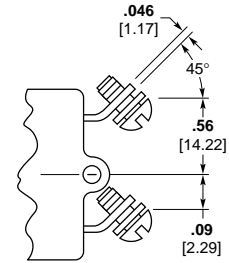


Mounting Hardware

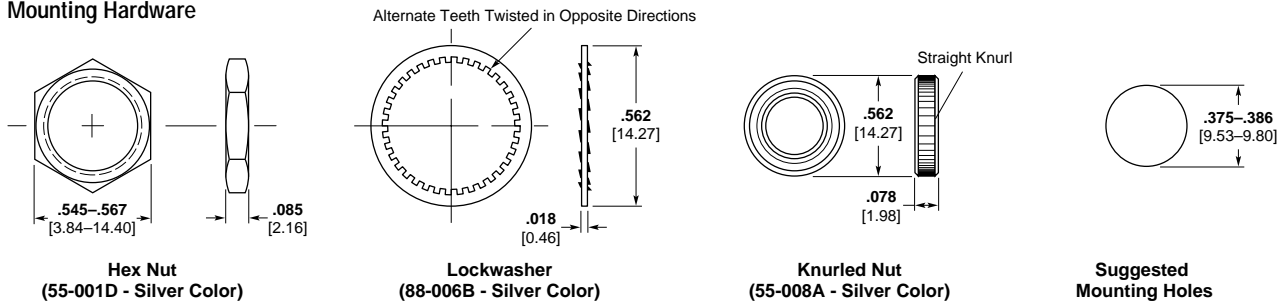


W31 Outline Dimensions


Terminal Style 1

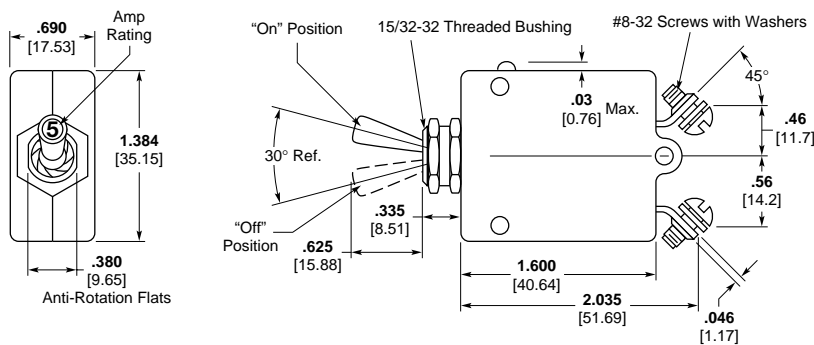

Terminal Style 5

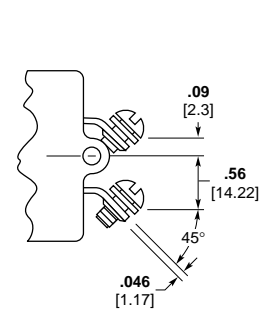

Mounting Hardware

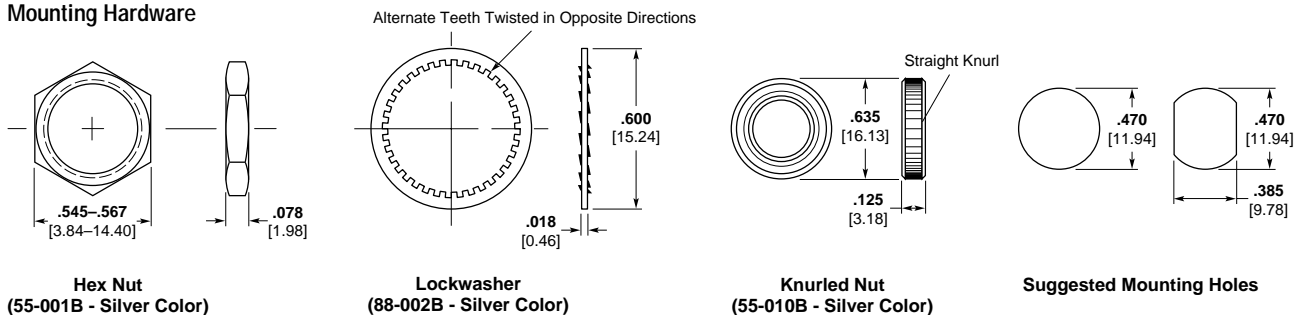

For complete product information, reference catalog 1308242.