THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

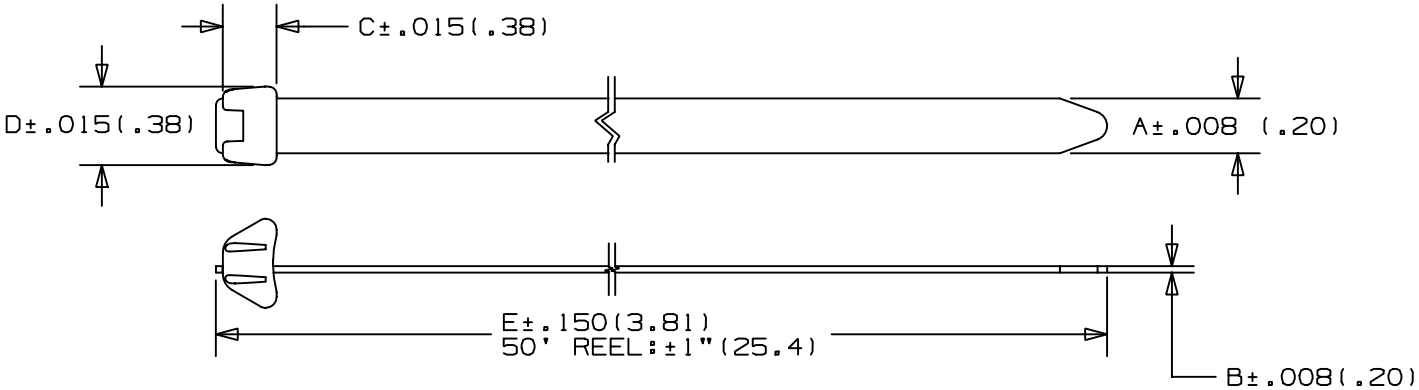

PANDUIT * PART NO.	DESCRIPTION	BUNDLE DIA. MIN. in. (mm)	BUNDLE DIA. MAX. in. (mm)	A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)	MINIMUM LOOP TENSILE 2"/MIN. lbs. (N)	weight lbs/(kg) per 100/pcs
DT4EH	13.5 IN. LONG TIE	.020 (.51)	3.875 (98.4)	.500 (12.7)	.059 (1.50)	.490 (12.446)	.718 (18.24)	13.5 (342.9)	250 (1112)	2.6 (1.18)
DT8EH	27 IN. LONG TIE	.020 (.51)	8.0 (203.2)	.500 (12.7)	.059 (1.50)	.490 (12.446)	.718 (18.24)	27.0 (685.8)	250 (1112)	4.4 (2.0)
DTKEH	DURA-TY KIT 50' STRAPPING 25 HEADS	.020 (.51)	15'-9" (4.8 m)	.500 (12.7)	.059 (1.50)	.490 (12.446)	.718 (18.24)	50 ft. (15.24 m)	250 (1112)	———
DTHEH	BAG OF 25 HEADS	———	———	———	———	.490 (12.446)	.718 (18.24)	———	———	———
DTREH	50' REEL OF STRAPPING	———	———	.500 (12.7)	.059 (1.50)	———	———	50 ft. (15.24 m)	———	———

* SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE

REV	DATE	BY	CHK	DESCRIPTION	ECN - R		CUST	SUP
R	3/16/00	JV		RELEASED	SS27250	R		

CAD FILENAME/LAYERS

PANDUIT CORP. TINLEY PARK, ILLINOIS

DURA-TY

EXTRUDED CABLE TIES (EXTRA HEAVY)

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ± (.XXX) ±
(.XX) ± ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY JV

MAT'L: BLACK ACETAL

SCALE N/A

DATE 3/16/00

CHK'D

DRAWING NO. SS-27250

DWG A SIZE