



PANDUIT PART NO.	MAX. BUNDLE DIA.	PACKAGE QTY.	LENGTH "L" +/- .3" [7]
MLT4EH-LP	4" [102]	50	17.1" [434]
MLT6EH-LP	6" [152]	50	23.4" [594]
MLT8EH-LP	8" [203]	50	29.7" [754]
MLT10EH-LP	10" [254]	50	35.9" [912]
MLT12EH-Q	12" [305]	25	42.2" [1072]

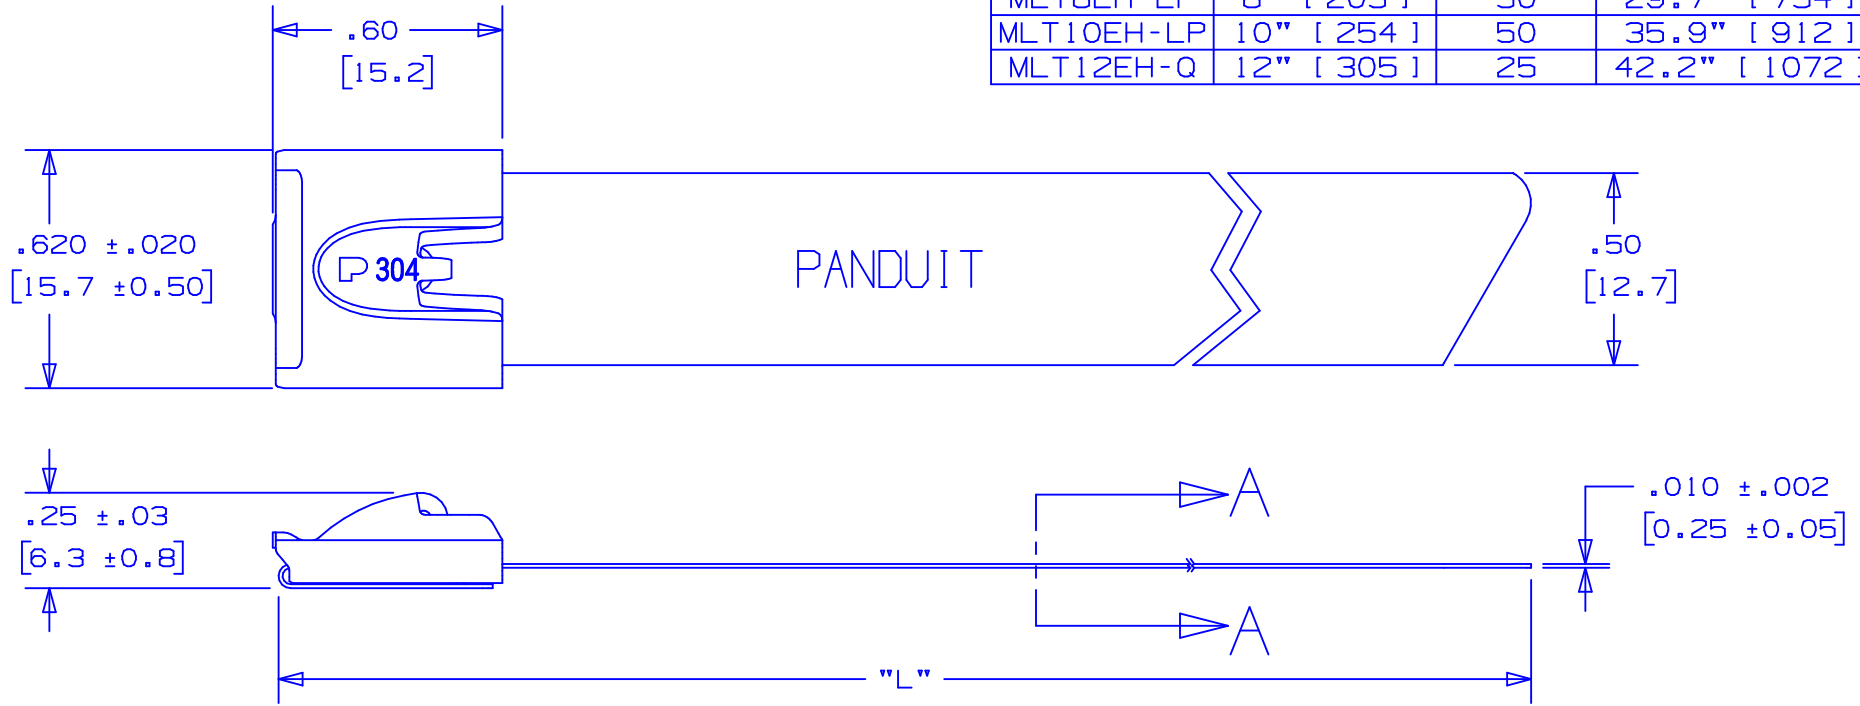

NOTES:

1. APPLICATION TOOLS - ST3MT & RT1HT
2. MINIMUM LOOP TENSILE STRENGTH - 600 LBS. (2670 NEWTONS) WHEN TESTED ON A 3" MANDREL.
3. [] DENOTES DIMENSION IN MILLIMETERS
4. TOLERANCES:
 - .XXX = ±.010 [.25]
 - .XX = ±.02 [.5]
 - .X = ±.03 [.8]
 - ANGLES = ±2°
5. MATERIAL: 304 STAINLESS STEEL



SECTION A - A
SCALE: 4x

S41155_00

PANDUIT CORP.

TINLEY PARK, ILLINOIS

METAL LOCKING TIE EXTRA HEAVY DUTY
304 STAINLESS STEEL

REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM	CUST	DRAWN BY	CHK'D	SCALE	DRAWING NO.
00	1/04	JAMB		RELEASED	11307			JAMB		2x	S41155