

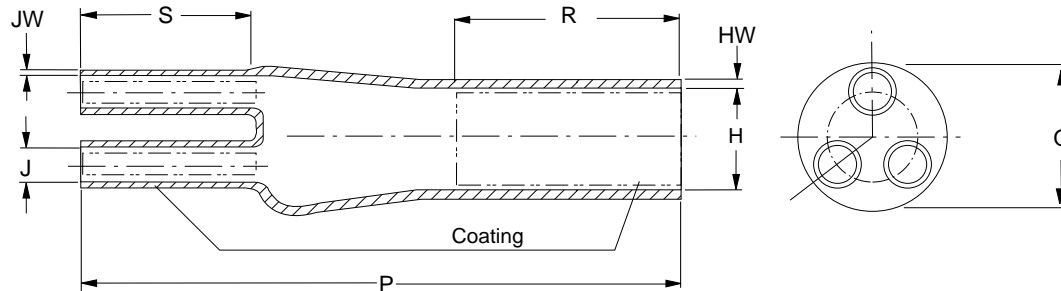
Description:

Material: Semi-rigid thermoplastic material, electrically insulating, weather, corrosion and impact resistant.

Adhesive/sealant: /S (239) - Hot Melt adhesive provides water tight and environmental seal.

Application: LV Terminations and Joints.

Colour = Black

**Standard Products/Dimensions**

Part Number	H		J		P	R	S	HW	JW	Q
	a	b	a	b						
	min	max	min	max	$\pm 10\%$	$\pm 10\%$	$\pm 10\%$	$\pm 20\%$	$\pm 20\%$	$\pm 10\%$
402W533/S	38	13	16	4.2	103	45	28	2.7	1.5	22
402W516/S	63	22	26	9	180	85	40	3.5	1.5	35
402W520/S	70	23	27	9	159	107	52	4.0	2.0	32
402W525/S	85	32	32	12	180	130	50	3.0	2.5	38
402W526/S	95	28	44	13	205	90	45	3.5	2.5	42
402W530/S	90	42	38	15.5	180	130	50	2.7	2.7	46
402W545/S	124	58	51	22	239	188	51	3.0	3.2	65

Modifications

Part Number	Mod. Code	Description
All	R03	Body coated, fingers uncoated
All	R10	Printed with Batch No. only

Notes

- Dimensions in millimeters
a = as supplied, b = after free recovery
- Material meets the requirements of PPS 3011/31
Adhesive /S (239) meets the requirements of PPS 3012/70
- Coating area approximately as shown in drawing
- Drawing for size 520, 525, 530 and 545 will be changed later to show the more slim shape**

Printing: Raychem - Product Description - H&J Min/Max dim. - Batch Number

Packaging: xx pcs. + 1 installation instruction in a polybag

Labelling: Quantity, description and batch number