



a) Part as supplied

AT 099 - XX

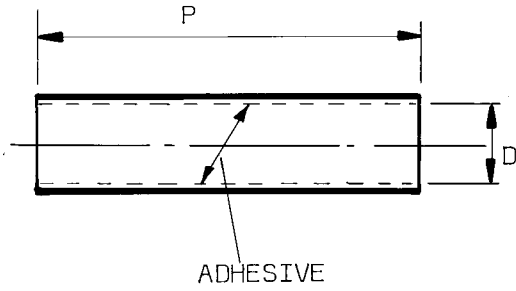

b) Part after unrestricted recovery

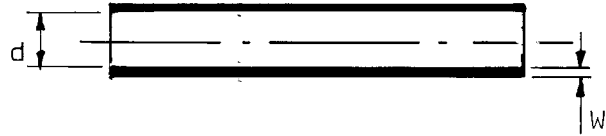

Longitudinal change on recovery 0% to -10%

D Refers to Internal Coated Dia

d Refers to Internal Uncoated Dia

W Refers to Uncoated Wall Thickness

DIMENSIONS IN MM

PART DESCRIPTION	D	d	P	W
	MIN	MAX	+5%	
	a	b	a	b
AT 099 -10	5.5	2.4	40	0.84 + 0.16
-11	5.5	2.4	50	0.84 + 0.16
-12	5.5	2.4	60	0.84 + 0.16
-18	8.0	3.2	40	0.89 + 0.16
-19	8.0	3.2	50	0.89 + 0.16
-20	8.0	3.2	60	0.89 + 0.16
-26	10.0	4.8	40	1.02 + 0.20
-27	10.0	4.8	50	1.02 + 0.20
-28	10.0	4.8	60	1.02 + 0.20
-34	12.2	6.4	40	1.22 + 0.20
-35	12.2	6.4	50	1.22 + 0.20
-36	12.2	6.4	60	1.22 + 0.20
-42	18.5	9.5	40	1.45 + 0.28
-43	18.5	9.5	50	1.45 + 0.28
-44	18.5	9.5	60	1.45 + 0.28
-50	24.9	12.7	40	1.78 + 0.28
-51	24.9	12.7	50	1.78 + 0.28
-52	24.9	12.7	60	1.78 + 0.28
-58	37.5	19.0	40	2.41 + 0.40
-59	37.5	19.0	50	2.41 + 0.40
-60	37.5	19.0	60	2.41 + 0.40

**Copyright(!)
Urheberrechte**

The copyright in this drawing is the property of Raychem Ltd. The drawing is issued on condition that it is not copied, reproduced, or disclosed to a third party, either in whole or in part without the prior written consent of Raychem Ltd.

Drawn J. Haydon Checked *JL* Issue 2 Date Jan 88

Approval
Design *[Signature]*

MKTG *[Signature]*

Q.C. *[Signature]*

Conforms to ISO Recommendations
3rd Angle Projection
Not to scale

