


<b>Product Construction</b> 22 AWG Wires, Overall Shield, Overall Jacketed Cables	<b>Product Description</b> EPD 21136C thru' to 21146C
--	--

<b>Designer</b> <i>J. Campbell</i>	<b>Date</b> <i>24<sup>th</sup> August, 1994.</i>	<b>Product Manager</b> <i>Shardner</i>	<b>Date</b> <i>25.8.94</i>	<b>Page 1</b> of 1
---------------------------------------	---	---	-------------------------------	-----------------------

<p>The copyright in this drawing is the property of Raychem Limited. The drawing is issued on condition it is not copied, reproduced or disclosed to a third party either in whole or in part without prior written consent of Raychem Limited.</p>	<b>Specifications</b> Components to MSV 34401  Finished Cable to MSV 34413
---	---

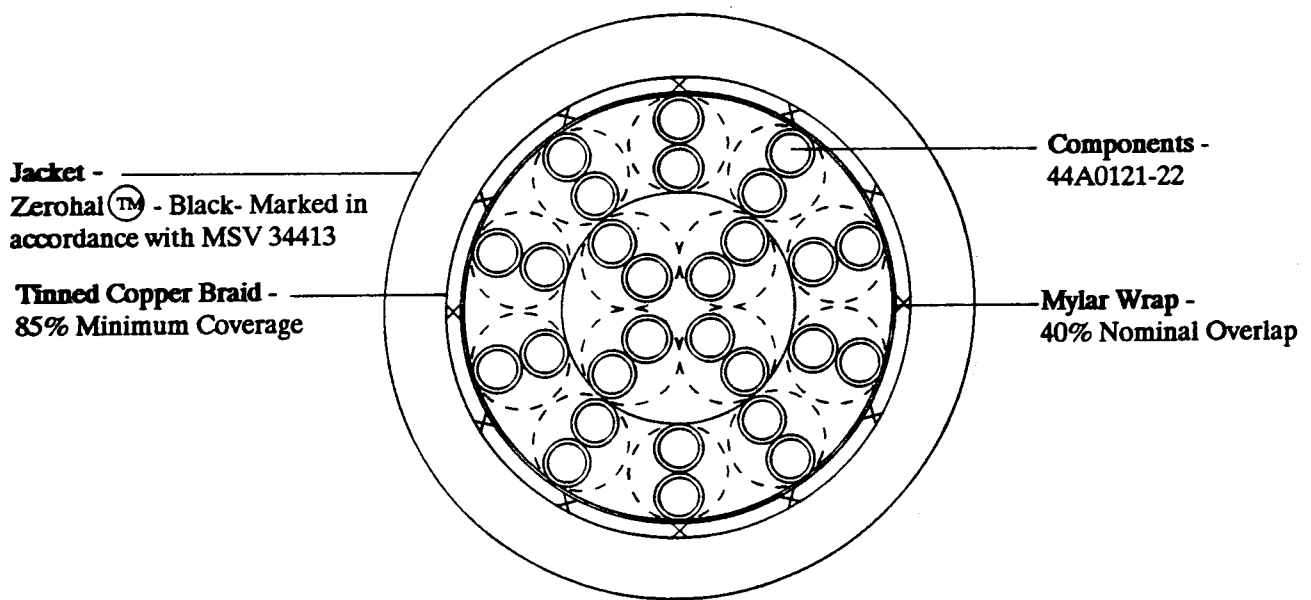

EPD NUMBER	NO. OF CORES 22AWG	CORE ASSEMBLY	SCREEN SIZE AWG	OVERALL JACKET WALL THICKNESS		OVERALL DIAMETER		NOM WEIGHT Kgs/Km
				NOM (mm)	MIN (mm)	NOM (mm)	TOL ±mm	
21136C	1x2	1	36	1.3	1.0	5.7	0.30	45
21137C	2x2	2	36	1.3	1.0	7.7	0.40	73
21138C	4x2	4	36	1.3	1.0	8.3	0.40	97
21139C	5x2	5	36	1.3	1.0	8.9	0.40	111
21140C	7x2	1+6	36	1.3	1.0	9.8	0.50	140
21141C	10x2	2+8	36	1.3	1.0	10.8	0.50	178
21142C	14x2	4+10	36	1.3	1.0	12.2	0.60	228
21143C	18x2	F+6+12	36	1.3	1.0	13.8	0.70	286
21144C	24x2	2+8+14	34	1.3	1.0	15.1	0.80	359
21145C	30x2	4+10+16	34	1.4	1.1	16.6	0.80	435
21146C	44x2	2+8+14+20	32	1.7	1.3	20.2	1.00	643

Fillers and Binders may be used as necessary to form a round assembly.

COLOUR CODING: In each layer - first pair 90/0, second pair 92/0, remaining pairs 9/0.

Raychem Limited Faraday Road, Dorcan SWINDON SN3 5HH Tel: (0793) 528171 Telex: 449409	Registration Number: 674706 London, England Registered Office: Rolls House 7 Rolls Building, Fetter Lane LONDON EC4A 1NHH
---	---