


Wire Termination to Pin/Post/Tab

Solder Sleeve discrete wire terminators

Fax-on-Demand: (800) 260-9099
(650) 361-6523

FAX ID	Description
5600	Data sheet

Before ordering check with factory for most current data.

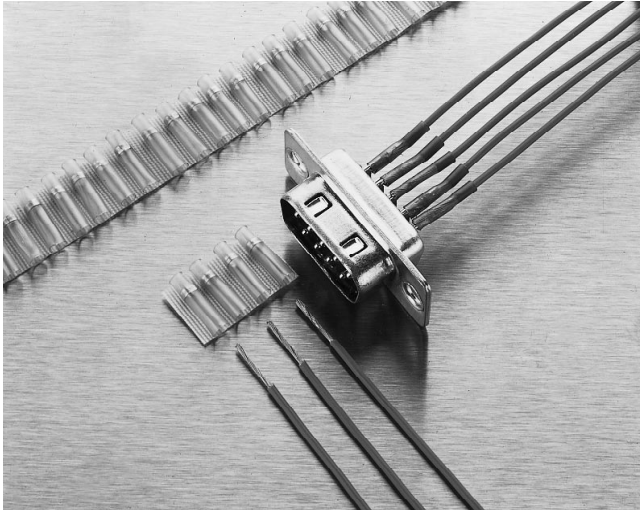

Applications

Used for terminating wires to component terminals, such as motor tabs, connector pins, and switch terminals.

Features/Benefits

- Transparent Kynar or polyolefin insulation sleeve provides encapsulation, inspectability, strain relief, and insulation.
- Prefluxed solder preform offers a controlled soldering process.
- One-piece design means easy installation and low installed cost.
- Optional tape carrier provides convenience and ease of installation.
- UL and CUL Recognized.



Product Options

Product series	Max. operating temperature	Min. wire temperature rating
CWT	125°C	85°C
D-129, D-141, D-71X	150°C	125°C

Product Selection Process

1. Determine the application operating temperature.
2. From the Product Options table above, select the product series appropriate for the application, based on the temperature required.
3. Determine your component connection point type (pin, post, or tab) and dimensions.
4. Determine your wire gauge.
5. Optional: Select tape carrier center-to-center spacing (D-71X series only). This should match center spacing of component terminals.
6. Select part number from the appropriate table:
 - For CWT series (applications with low-temperature wires—below 125°C), use Table A.
 - For D-129/141/71X series (applications with wires rated higher than 125°C), use Table B.

Table A. CWT Series (125°C rated) (mm/in)







Connection-point type and size			
Terminal dimensions		Wire AWG/mm ²	Part Number
 pin	W = up to 0.63 (.025)	24 (0.24) 20 (0.61)	CWT-1501 CWT-1502
	W = 0.63 (.025) to 0.89 (0.35)	24 (0.24) 22 (0.38) 20 (0.61)	CWT-1501 CWT-1502 CWT-1503
	W = 0.89 (0.35) to 1.14 (.045)	24-22 (0.24-0.38) 20-18 (0.61-0.95)	CWT-1502 CWT-1503
	W = 1.14 (.045) to 1.52 (.060)	24-22 (0.24-0.38) 20-18 (0.61-0.95)	CWT-1503 CWT-1504
 post	W = up to 1.52 (.060)	24-20 (0.24-0.61)	CWT-1501
	W = 1.27 (.050) to 2.28 (.090)	24-18 (0.24-0.95)	CWT-1502
 tab	W = 1.77 (.070) to 2.79 (.110)	24-18 (0.24-0.95)	CWT-1503
	W = 2.54 (.100) to 3.80 (.150)	24-18 (0.24-0.95)	CWT-1504
	W = 2.28 (.090) to 4.70 (.187)	22-16 (0.38-1.21)	CWT-1505
	W = 3.30 (.130) to 6.40 (.250)	22-16 (0.38-1.21)	CWT-1506

Table B. D-129/141/71X Series (up to 150°C rated) (mm/in)

Connection-point type and size		Tape carrier spacing of sleeves (center-to-center)						
Terminal dimensions		Wire		None	1.27 (0.050)	2.76 (0.109)	3.17 (0.125)	4.0 (0.156)
		AWG	mm ²					
 pin	W = up to 0.61 (.024)	30-26 (0.05-0.15) 24-22 (0.24-0.38)	D-141-30 D-141-07	D-713-03				
	W = 0.63 (.025) to 0.81 (.032)	20 (0.61)	D-141-31		D-711-00	D-711-04	D-711-7	D-711-08
	W = 0.76 (.030) to 1.27 (.050)	24-20 (0.24-0.61)	D-141-56					
 post	W = up to 1.52 (.060)	24-20 (0.24-0.61)	D-129-05		D-714-01			
	W = 1.27 (.050) to 2.28 (.090)	24-20 (0.24-0.61)	D-129-03					D-714-00
 tab	W = 2.28 (.090) to 3.55 (.140)	24-20 (0.24-0.61)	D-129-0043					

For Fine Wire Terminations 0.15 mm² (26 AWG) and Smaller* (mm/in)

Part number*	Inside diameter		Fully recovered [†]	Length ^{††}
	As supplied**			
D-110-0062	1.0 (0.040)		0.6 (0.025)	16.0 (0.630)
D-110-0217	1.0 (0.040)		0.6 (0.025)	9.0 (0.360)
D-141-13	0.75 x 1.65 (0.030 X 0.065)		0.75 (0.030)	4.7 (0.185)
D-141-22	0.75 x 1.65 (0.030 X 0.065)		0.75 (0.030)	6.0 (0.240)
D-141-30	0.75 x 1.65 (0.030 X 0.065)		0.75 (0.030)	9.5 (0.375)

Note: Micro Solder Sleeve terminators are used for attaching leads smaller than 26 AWG (0.15 mm²) to terminals less than 0.6 mm (.025 in) wide.

*The D-110 series sleeves are primarily for single wire terminations and do not have a wire stop. The D-141 series will accept either one or two wires; the parts have a built-in wire stop that will locate the wire approximately 0.76 mm (0.03 in) from bottom of terminal.

**Minimum. Wire insulation must be smaller than this. When using the D-141 parts for two-wire terminations, the combined wire insulation diameters must be less than 1.5 mm (.060 in).

†Maximum. The combination of conductor diameter and terminal width and the wire insulation must be greater than this.

††The terminal length should be at least 1.2 mm (0.05 in) shorter than this. The wire strip length must be adjusted so that, when terminated, the exposed conductor is covered by the sleeve.

Product Characteristics

Material

Insulation (D-129, D-141, D-71X)	Radiation-crosslinked, heat-shrinkable polyvinylidene fluoride (Kynar)
Insulation (CWT)	Radiation-crosslinked, heat-shrinkable polyolefin
Solder and flux (D-129, D-141, D-71X)	Sn63 Pb37 RMA flux
Solder and flux (CWT)	Sn50 Pb32 Cd 18, RA flux

Typical performance

Voltage drop	2.0 mV
Tensile strength	Exceeds strength of conductor
Dielectric strength	2.0 kV
Temperature rating (CWT)	-55°C to 125°C
Temperature rating (D-129, D-141, D-71X)	-55°C to 150°C
Insulation resistance	1000 megohms

Specifications/Approvals

Series	Agency	Raychem
CWT	UL and CUL E87681	D-5023
D-129, D-141	UL and CUL E87681	RT-1404

Installation

For proper installation of these devices, the correct heating tool and reflector attachment must be used.

Either of the following Raychem heating tools are recommended:

- HL1802E
- AA-400 Super Heater

Refer to Raychem installation procedure RCPS 200-12 (for D-129, D-141, D-71X) or RPIP 824-00 (for CWT) for detailed instructions and recommended reflector attachment.

You will find ordering information for these tools in the Application Equipment section of this catalog.